


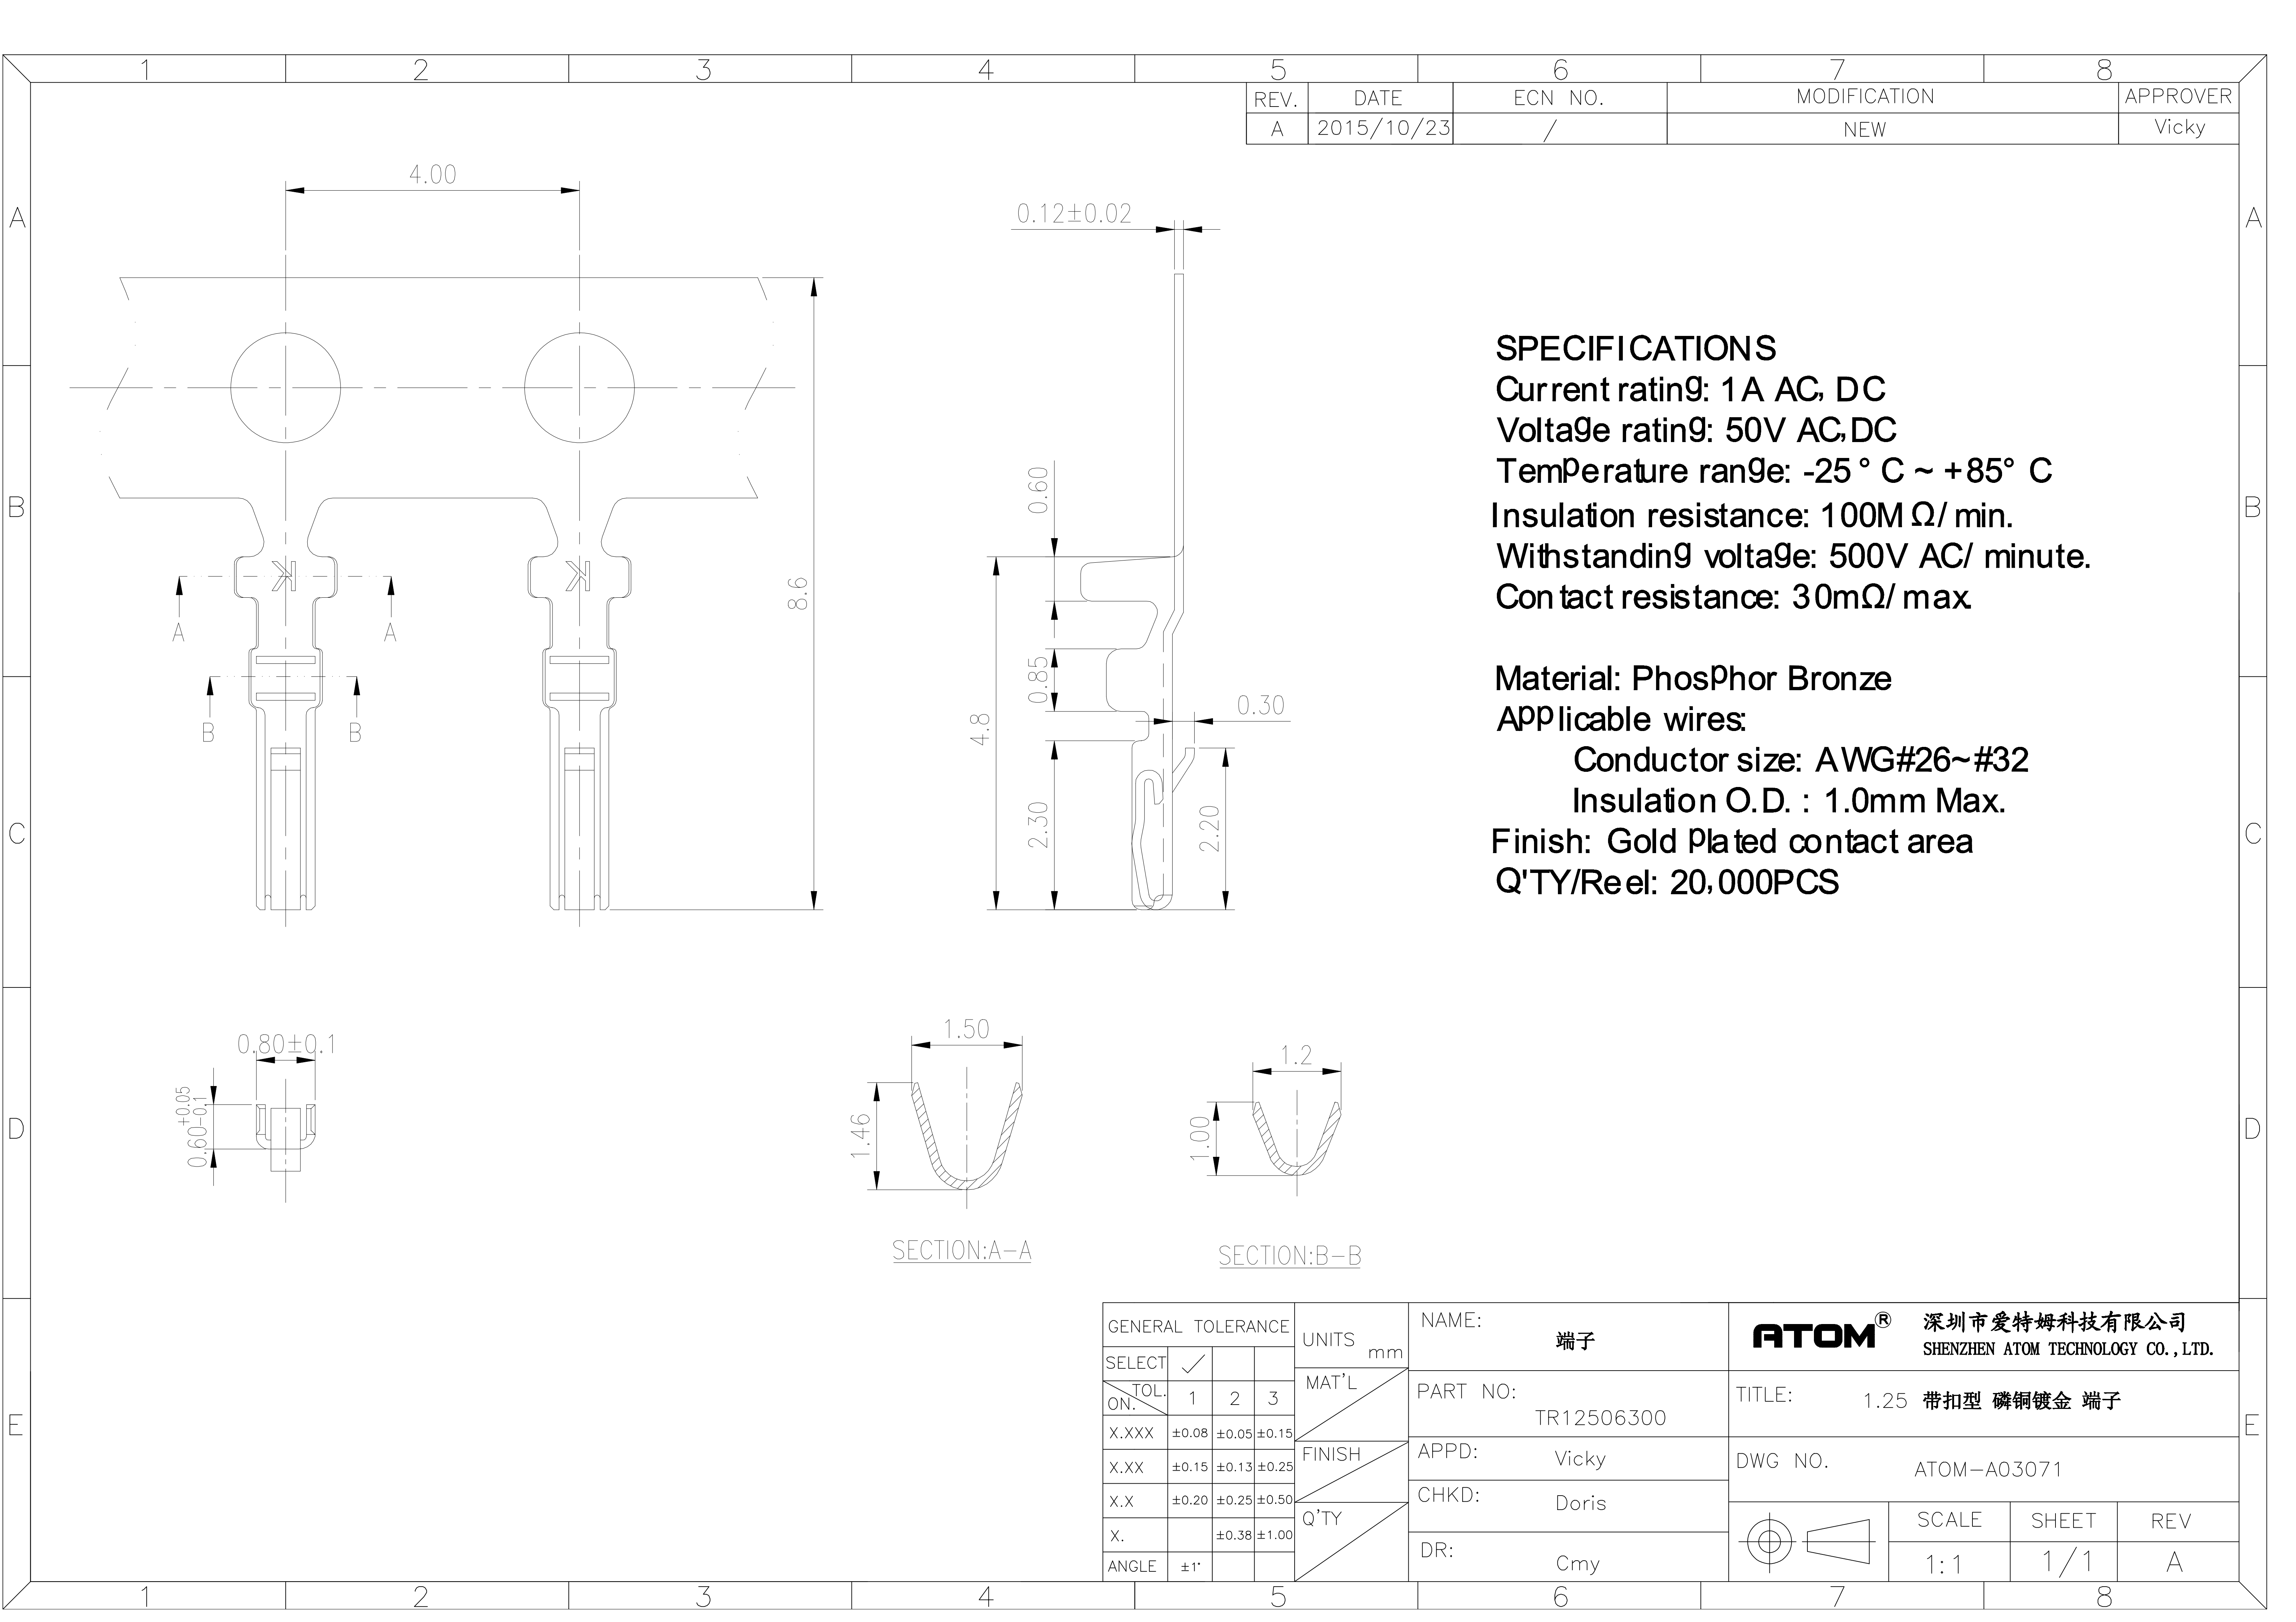

5		6		7		8	
REV.	DATE	ECN NO.		MODIFICATION		APPROVER	
A	2015/10/23	/		NEW		Vicky	

SPECIFICATIONS
Current rating: 1 A AC, DC
Voltage rating: 50V AC,DC
Temperature range: -25 ° C ~ +85° C
Insulation resistance: 100M Ω/ min.
Withstanding voltage: 500V AC/ minute.
Contact resistance: 30mΩ/ max

Material: Phosphor Bronze
Applicable wires:
Conductor size: AWG#26~#32
Insulation O.D. : 1.0mm Max.
Finish: Gold Plated contact area
Q'TY/Reel: 20,000PCS

GENERAL TOLERANCE				UNITS mm	NAME: 端子	ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓					PART NO: TR12506300	TITLE: 1.25 带扣型 磷铜镀金 端子		
TOL. ON.	1	2	3	MAT'L	APPD: Vicky		DWG NO. ATOM-A03071		
X.XXX	±0.08	±0.05	±0.15						
X.XX	±0.15	±0.13	±0.25	FINISH	CHKD: Doris	SCALE 1:1			
X.X	±0.20	±0.25	±0.50						
X.		±0.38	±1.00	Q'TY	DR: Cmy	SHEET 1 / 1			
ANGLE	±1°								
					REV A				