
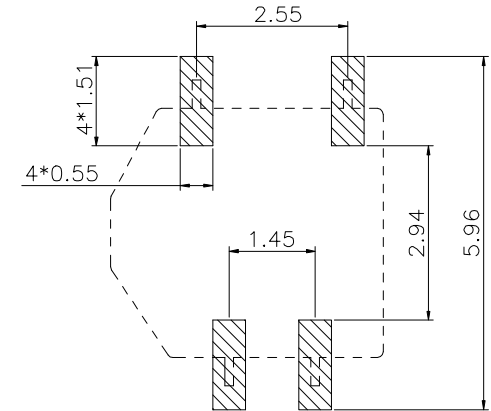



ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

临时版本

REV.	DATE	ECN NO.	MODIFICATION
X0	2024.08.16	/	NEW

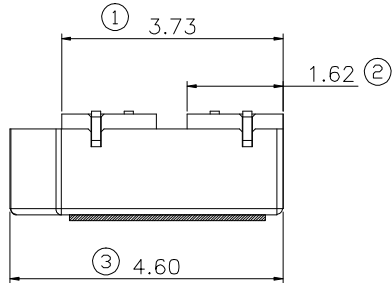

RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE:±0.05

NOTES:

Material:

A.Housing:LCP UL94V-0,Color-Black

B.Terminal:C5210

2.PFull gold 1U", nickel base 50-80u"

Electrical :

1.Rating current: 0.3A

2.Insulation resistance:1000MΩ MIN at 500V DC

3.Contact Resistance 50mΩ MAX

4.Withstanding Voltage: 500V AC for 1 minute

Mechanical:

1.Insertion force:10N MAX

2.Withdrawal force:0.1N MIN



3.Mating Cycles : 10Cycles

Environment characteristics:

1.Operating: - 20°C to +70°C

Nonoperating: - 25°C to +85°C

MAJOR DIMENSION:▼

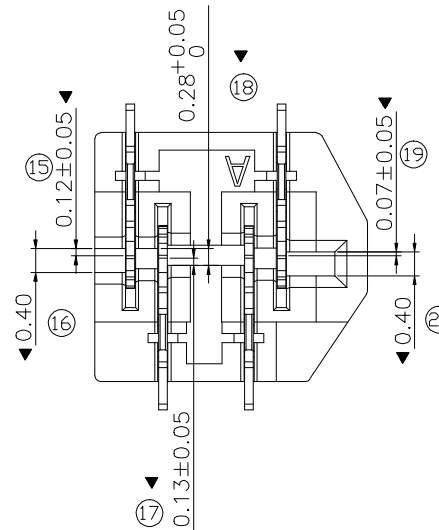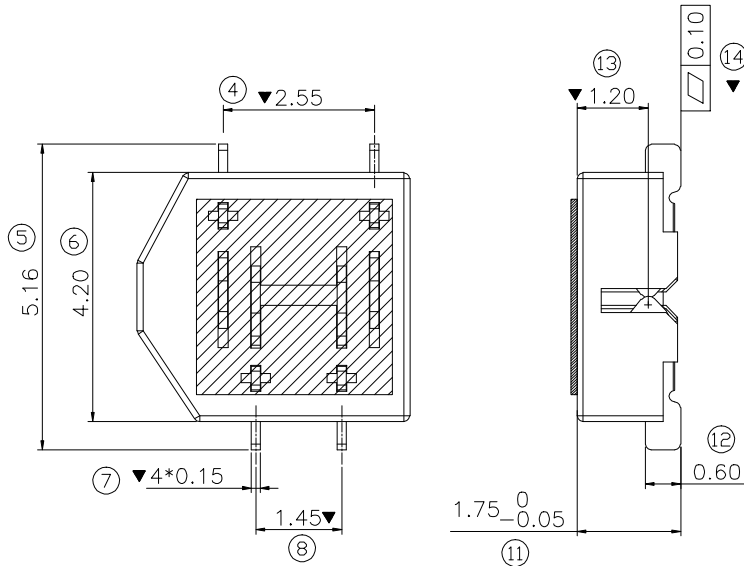

ITEM	Name	Material	Quantity
A	Housing	High temperature plastic UL94V-0,Color-Black	1PCS
B	Contact	Phosphor Bronze T=0.15 Gold Plating over all	4PCS
C	Gummed paper	high-temperature adhesive tape T=0.10	1PCS

GENERAL TOLERANCE			UNITS mm	NAME(INTENDED USE)	TITLE: 4Pin 动态试条插座 IF=1.75mm
SELECT	TOL.	ON.			
X.XXX	±0.10	±0.15	±0.20	动态试条插座 GP29A-06200	DWG NO.: ATOM-A10133
X.XX	±0.15	±0.20	±0.25		
X.X	±0.20	±0.25	±0.30	CHKD: DR: MING	SCALE 1:1
X.	±0.25	±0.30	±0.50		
ANGLE	±2'				SHEET 1/1
					REV. X0

ATOM®深圳市爱特姆科技有限公司
SHENZHEN ATOM TECHNOLOGY CO.,LTD.