
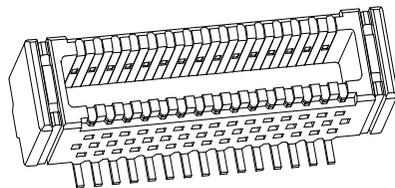
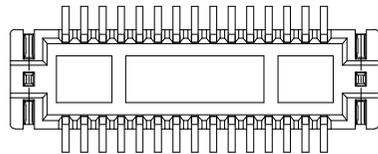
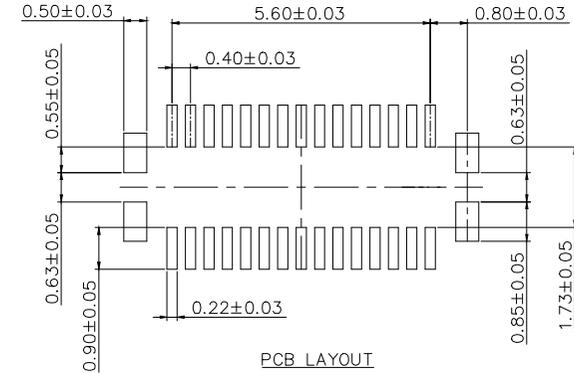
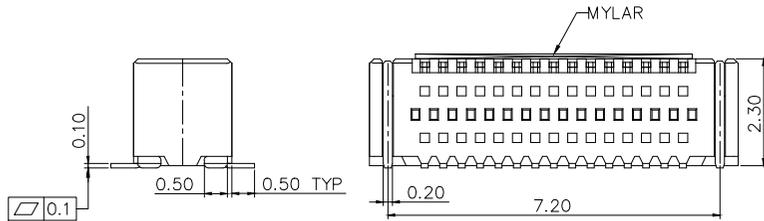



ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

REV.	DATE	ECN.NO	MODIFY.CONTENT	APPROVER
A0				

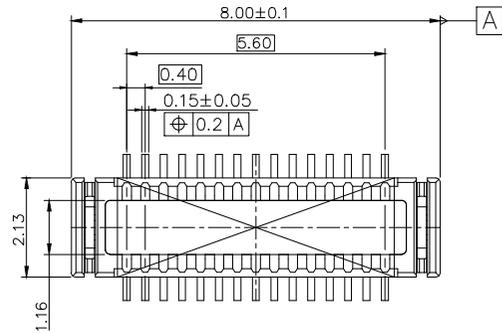

NOTES:

1, MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP, UL94V-0; COLOR: BLACK
- 1.2 CONTACT: COPPER ALLOY
- 1.3 FITTING NAIL: COPPER ALLOY

2, FINISH:

2.1 CONTACT:

- UNDERPLATING: 50~100u" NICKEL OVERALL
- FINISH: GOLD FLASH

3, REFLOW SOLDER CAPABLE TO 260°C

GENERAL TOLERANCE			UNITS	mm	NAME (INTENDED USE)	ATOM ® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.
SELECT	✓		MAT'L		BTB0.4mm 2*XP 双槽 公座	
TOL.	1	2	3		PART NO. (INTENDED USE)	TITLE: BTB0.4mm 2*5P 双槽 公座 合高H=3.5mm 无柱 贴高温胶纸 卷装 (黑色)
X.XXX	±0.15	±0.05	±0.15		BTB040***-M1D07***	
X.XX	±0.25	±0.13	±0.25		FINISH	
X.X	±0.30	±0.25	±0.50		Q'TY	
X.	±0.38	±0.38	±1.00			
ANGLE	±5°					
					APPD: JASON	DWG NO: ATOM-A03613
					CHKD: DORIS	
					DR: DAVID	
						SCALE: 1:1
						SHEET: 1/1
						REV: A0