

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2014/07/07	/	NEW	Vicky
B	2017/08/24	RD00317082401	胶芯与焊片结构处变更, 详见B处	Vicky









TABLE A

PIN	A	B	C
2*5P	3.80	1.60	3.20
2*12P	6.60	4.40	6.00
2*15P	7.80	5.60	7.20
2*17P	8.60	6.40	8.00
2*20P	9.80	7.60	9.20
2*25P	11.80	9.60	11.20

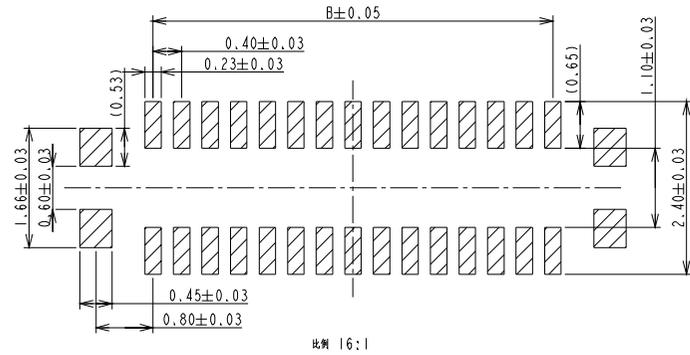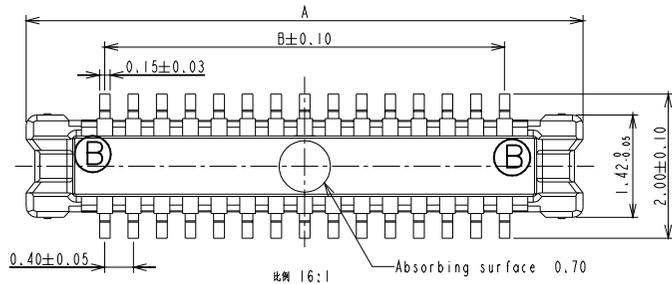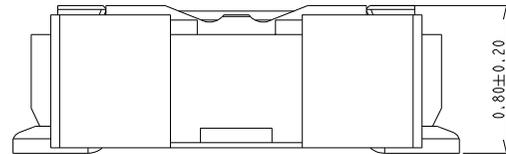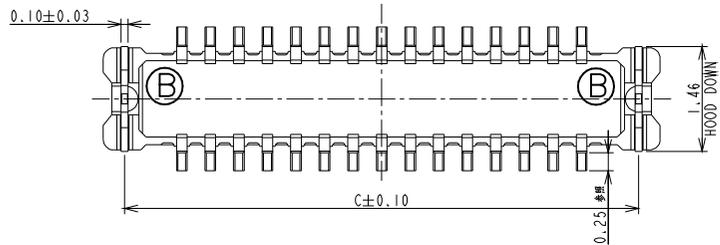

比例 40:1
Cooperate with highly

NOTES:

- 1.0: RATING:
- 1.1: VOLTAGE: 60V AC/DC
- 1.2: CURRENT: 0.3A/PIN
- 1.3: OPERATION TEMPERATURE: -55°C TO -85°C
- 2.0: ELECTRICAL CHARACTERISTIC:
- 2.1: CONTACT RESISTANCE: 50mΩ MAX INTIAL, 90mΩ MAX AFTER TEST
- 2.2: INSULATION RESISTANCE: 1000MΩ MIN INTIAL
- 2.3: DIELECTIC WITHSTANDING VOLTAGE: 150V AC FOR ONE MINUTE
- 3.0: MECHANICAL PERFORMANCE:
- 3.1: DURABILITY: 30 CYCLES

3	HOOD DOWN	2	Copper Alloy	GOLD PLATING ON SOLDER AREA
2	CONTACT	30	Copper Alloy	GOLD PLATING ON CONTACT AREA, GOLD PLATING ON SOLDER AREA
1	HOUSING	1	High Temperature Plastic	BLACK
ITEM	NAME	Q'TY	MATERIAL	REMARK/FINISH

GENERAL TOLERANCE				UNITS	NAME:	ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	✓			mm	BTB				
TOL.	1	2	3	MAT'L	PART NO:	TITLE: BTB0.4mm 2*XP 单槽 公座 合高H=0.8mm			
ON.	±0.05	±0.05	±0.15	FINISH	APPD:	DWG NO. ATOM-A03023			
X.XXX	±0.15	±0.13	±0.25	Q'TY	CHKD:	SCALE SHEET REV			
X.XX	±0.25	±0.25	±0.50		DR:	1:1 1/1 B			
X.X	±0.40	±0.38	±1.00		Jillian				
X.	±2'								
ANGLE									