

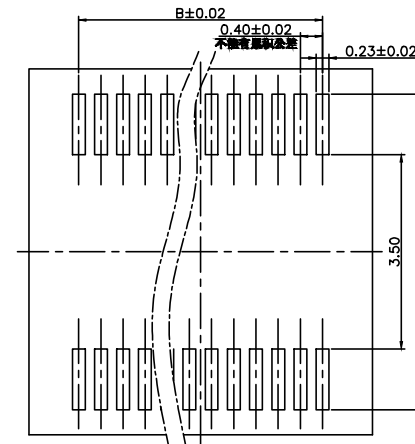
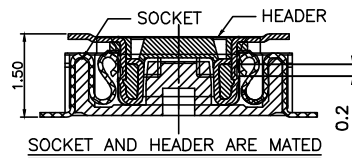
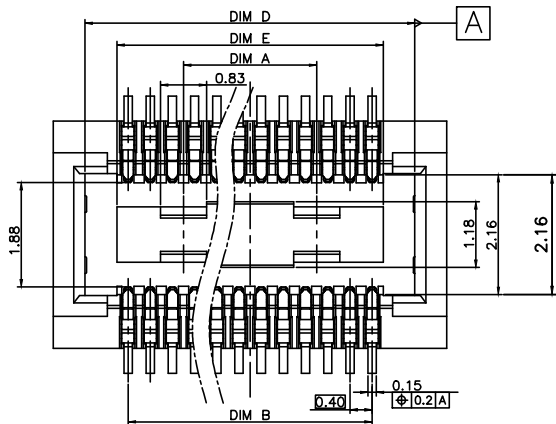


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2012/03/19	/	NEW	Vicky

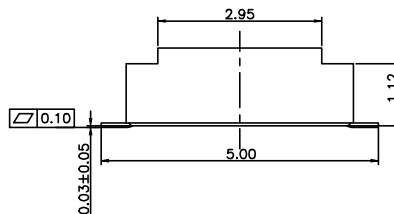

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

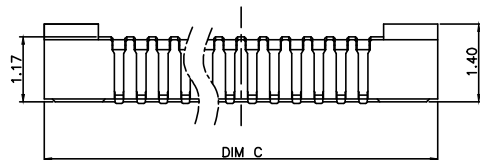

SPECIFICATIONS:
Voltage Rating:60V DC
Current Rating: 0.3A Max.(Each Pin)
Contact Resistance: 80mΩ MAX
Insulation Resistance: 1000MΩ MIN
Dielectric Withstanding : AC 100V
Operating Temperature : -55°C~+85°C
Contact Material: Copper Alloy,Gold plated,Nickel over all.
Insulator Material: Thermoplastic,UL94V-0 Black.

PIN No.	DIM A	DIM B	DIM C	DIM D	DIM E
20 PIN	1.60	3.60	6.30	5.15	4.00
24 PIN	2.40	4.40	7.10	5.95	4.80
30 PIN	3.60	5.60	8.30	6.75	6.00

GENERAL TOLERANCE				UNITS		NAME:		BTB			
SELECT	✓			mm		PART NO:		BTB040***-F1S03***			
ON.	TOL.	1	2	3	MAT'L	APPD:		Jason			
X.XXX	±0.15	±0.05	±0.15		FINISH	CHKD:		Vicky			
X.XX	±0.25	±0.13	±0.25		Q'TY	DR:		Cmy			
X.X	±0.30	±0.25	±0.50								
X.	±0.38	±0.38	±1.00								
ANGLE	±2°										

ATOM 深圳市爱特姆科技有限公司
SHENZHEN ATOM TECHNOLOGY CO., LTD.

TITLE: BTB0.4mm 2*XP 单槽 母座 合高H=1.5mm

DWG NO. ATOM-A03671

SCALE	SHEET	REV
1:1	1/1	A