

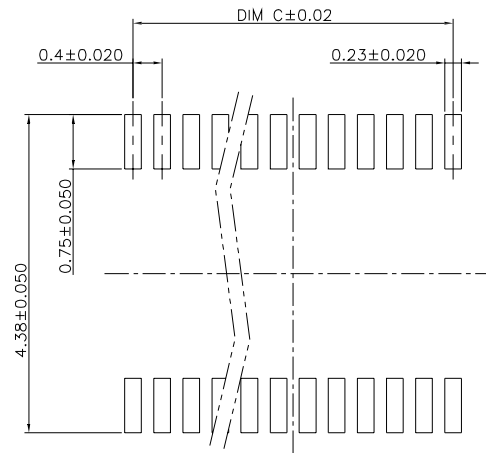
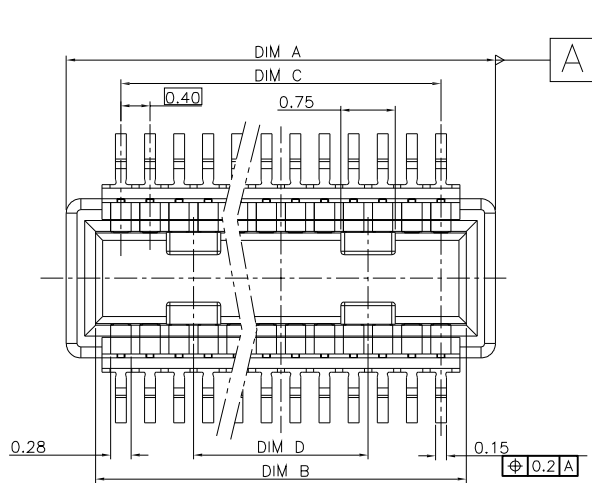


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2010/12/13	/	NEW	Vicky

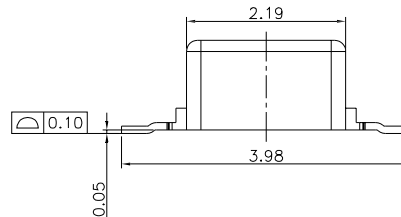


Pin No.	DIM A	DIM B	DIM C	DIM D
20	5.10	4.30	3.60	1.60
24	5.90	5.10	4.40	2.40
30	7.10	6.30	5.60	3.60


RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

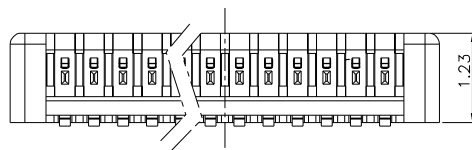

SPECIFICATIONS:
Voltage Rating:60V DC
Current Rating: 0.3A Max.(Each Pin)
Contact Resistance: 80mΩ MAX
Insulation Resistance: 1000MΩ MIN
Dielectric Withstanding : AC 100V
Operating Temperature : -55°C~+85°C
Contact Material: Copper Alloy,Gold plated,Nickel over all.
Insulator Material: Thermoplastic,UL94V-0 Black.

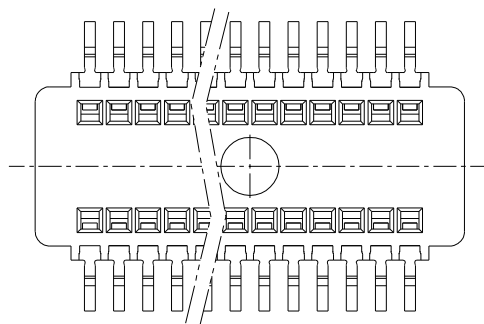

GENERAL TOLERANCE				UNITS	NAME:		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓			mm	BTB					
TOL.	1	2	3	MAT'L	PART NO:		TITLE: BTB0.4mm 2*XP 单槽 公座 台高H=1.5mm			
ON.					BTB040***-M1S03***					
X.XXX	±0.15	±0.05	±0.15	FINISH	APPD: Jason		DWG NO. ATOM-A03672			
X.XX	±0.25	±0.13	±0.25		CHKD: Vicky					
X.X	±0.30	±0.25	±0.50	Q'TY	DR: Cmy					
X.	±0.38	±0.38	±1.00							
ANGLE	±2'									



SCALE	SHEET	REV
1:1	1/1	A