


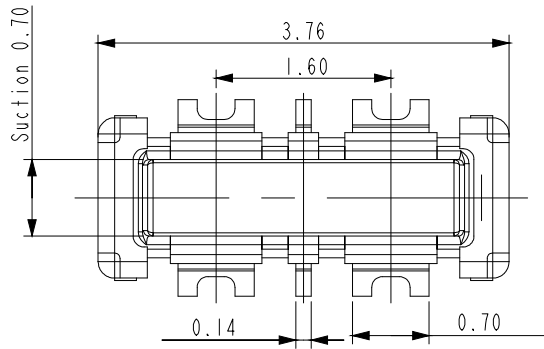
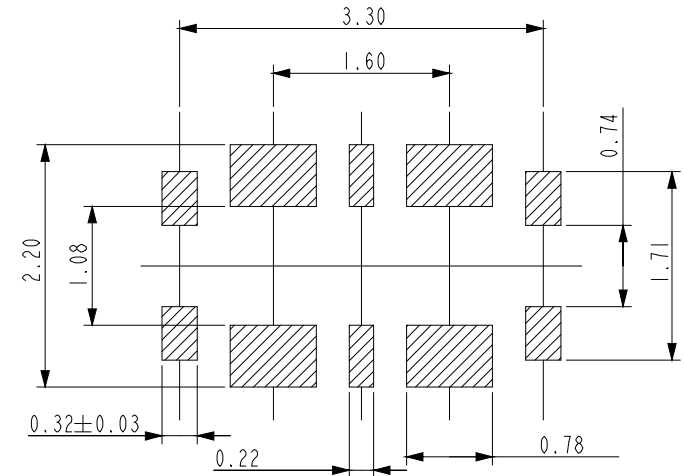


5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
A	2016/07/07	/	NEW
			APPROVER
			Jaosn



The degree of terminal flat
 0.08MAX (Contact and Metal)

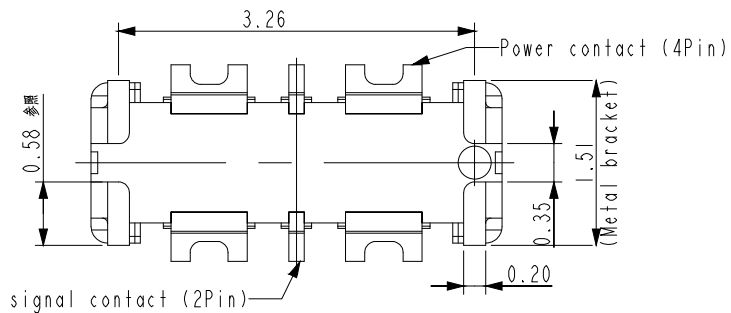

P.C.B LAYOUT
REFERENCE TOLERANCE:±0.05

SPECIFICATIONS:

- 1.Current Rating:SIGNAL PIN 0.3A/PIN,POWER PIN 5A/PIN
- 2.Insulation Resistance: 1000Megohms min
- 3.Dielectric Withstanding : AC 500V
- 4.Operating Temperature : -40°C~+85°C

Electrical Characteristics:

- 1.Contact Material: Copper Alloy
 - 2.Insulator Material: Thermoplastic,UL94V-0
 - 3.plating: Gold plated
- Lead free and ROHS compliant product

GENERAL TOLERANCE				UNITS mm	NAME:	ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	✓				BTB				
TOL.	1	2	3	MAT'L	PART NO:	TITLE: Customer Drawing For BTB0.8mm 6P 公座 台高H=0.6mm 卷装			
ON.					BTB080006-M1S15200				
X.XXX	±0.10	±0.05	±0.15	FINISH	APPD:	DWG NO.			
X.XX	±0.15	±0.13	±0.25		Jason	ATOM-A04106			
X.X	±0.20	±0.25	±0.50	Q'TY	CHKD:				
X.	±0.30	±0.38	±1.00		DAVID				
ANGLE	±2°				DR:				
					HUJING				