
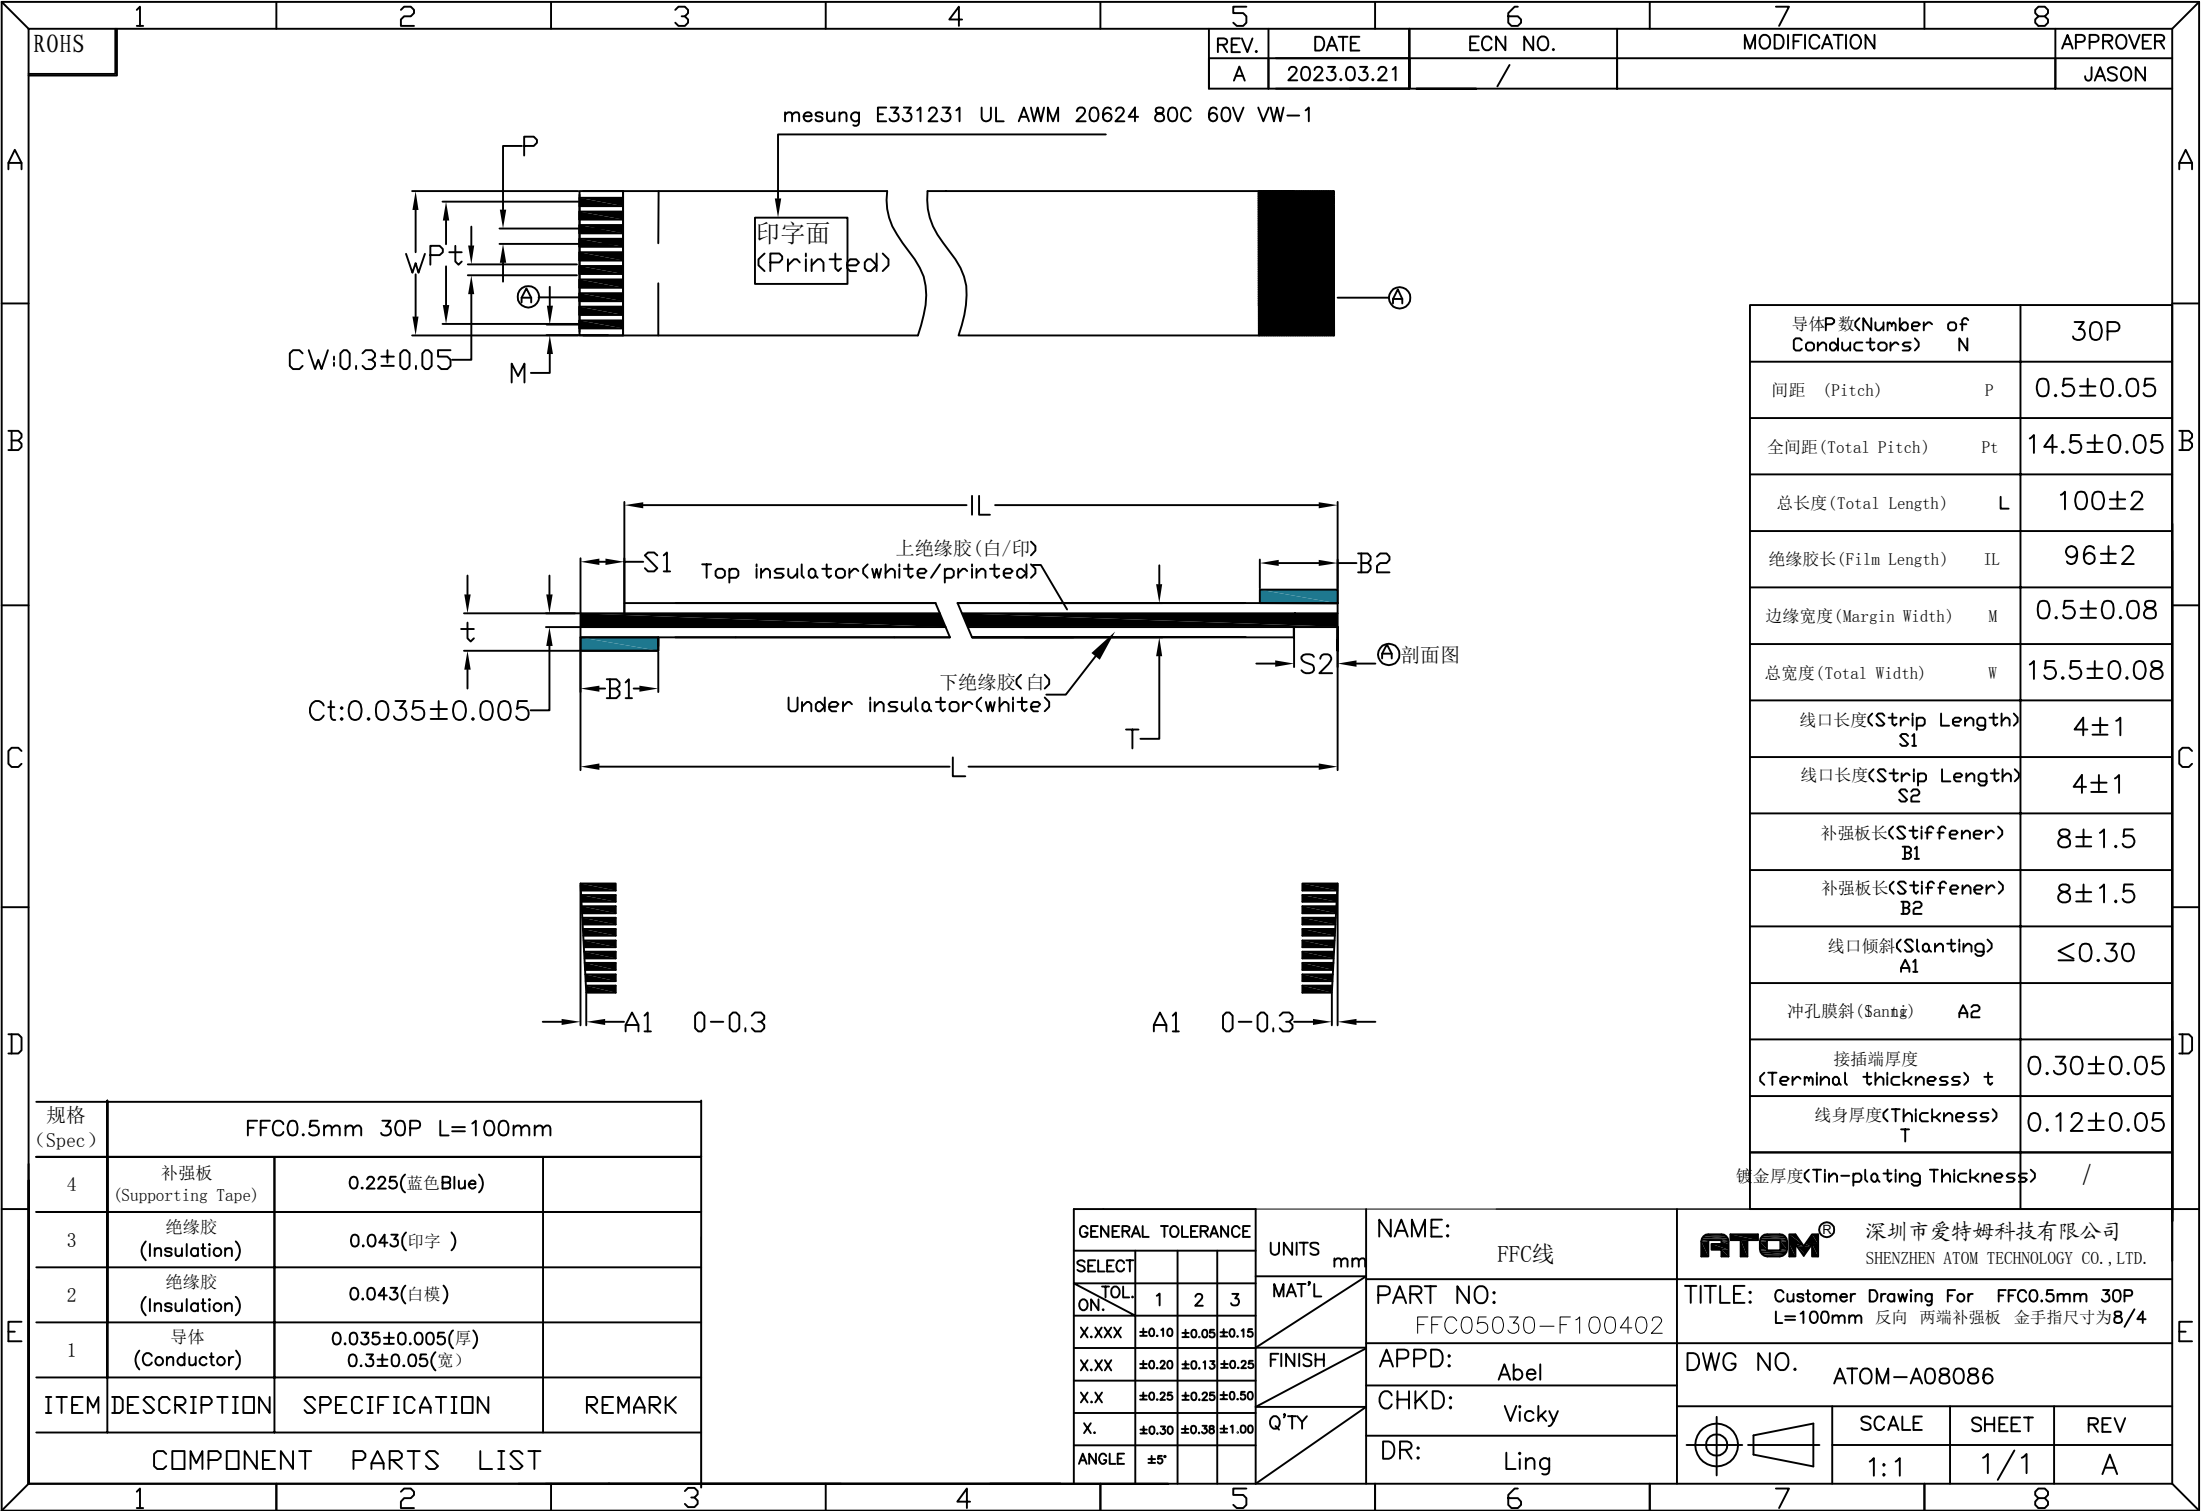




导体P数(Number of Conductors) N	30P
间距 (Pitch) P	0.5±0.05
全间距 (Total Pitch) Pt	14.5±0.05
总长度 (Total Length) L	100±2
绝缘胶长 (Film Length) IL	96±2
边缘宽度 (Margin Width) M	0.5±0.08
总宽度 (Total Width) W	15.5±0.08
线口长度 (Strip Length) S1	4±1
线口长度 (Strip Length) S2	4±1
补强板长 (Stiffener) B1	8±1.5
补强板长 (Stiffener) B2	8±1.5
线口倾斜 (Slanting) A1	≤0.30
冲孔膜斜 (Slanting) A2	
接插端厚度 (Terminal thickness) t	0.30±0.05
线身厚度 (Thickness) T	0.12±0.05
镀金厚度 (Tin-plating Thickness)	/

规格 (Spec)	FFC0.5mm 30P L=100mm		
4	补强板 (Supporting Tape)	0.225 (蓝色 Blue)	
3	绝缘胶 (Insulation)	0.043 (印字)	
2	绝缘胶 (Insulation)	0.043 (白模)	
1	导体 (Conductor)	0.035±0.005 (厚) 0.3±0.05 (宽)	
ITEM	DESCRIPTION	SPECIFICATION	REMARK
COMPONENT PARTS LIST			

GENERAL TOLERANCE				UNITS mm	NAME:		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT					FFC线					
TOL. ON.	1	2	3	MAT'L	PART NO:	TITLE: Customer Drawing For FFC0.5mm 30P L=100mm 反向 两端补强板 金手指尺寸为8/4				
X.XXX	±0.10	±0.05	±0.15		FFC05030-F100402					
X.XX	±0.20	±0.13	±0.25	FINISH	APPD:	DWG NO. ATOM-A08086				
X.X	±0.25	±0.25	±0.50		Abel					
X.	±0.30	±0.38	±1.00	Q'TY	CHKD:					
ANGLE	±5°				Vicky					
					DR:					
					Ling <th>SCALE</th> <th>SHEET</th> <th colspan="2">REV</th>	SCALE	SHEET	REV		
						1:1	1/1	A		