

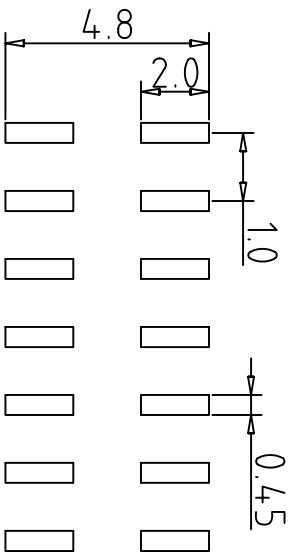
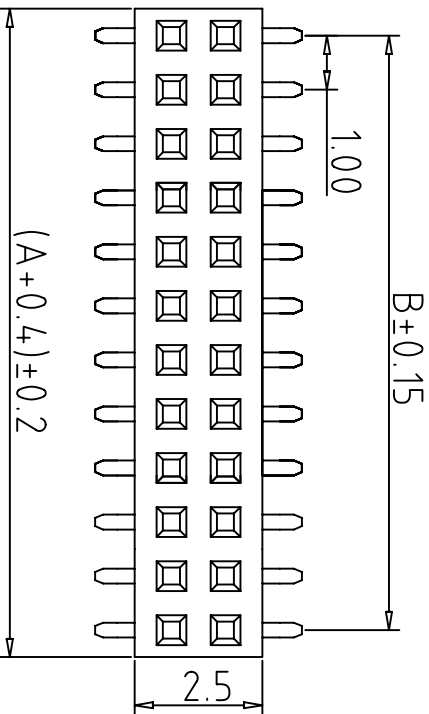


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2010/09/23	/	NEW	Vicky

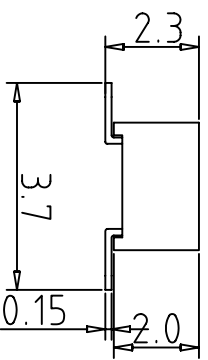

P.C.B. LAYOUT

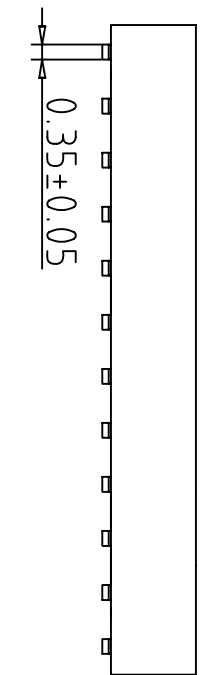

SPECIFICATIONS:

Current Rating: 1Amp
Insulator Resistance: 1000Megohms min
Dielectric withstanding: AC 500V
Operating Temperature: -40°~+85°
Contact Material: Brass
Insulator Material: PA6T UL94V-0
Plating: Gold Flash

PIN NO.	A	B	PIN NO.	A	B
2x1pin			2x26pin	26.0	25.0
2x2pin	2.0	1.0	2x27pin	27.0	26.0
2x3pin	3.0	2.0	2x28pin	28.0	27.0
2x4pin	4.0	3.0	2x29pin	29.0	28.0
2x5pin	5.0	4.0	2x30pin	30.0	29.0
2x6pin	6.0	5.0	2x31pin	31.0	30.0
2x7pin	7.0	6.0	2x32pin	32.0	31.0
2x8pin	8.0	7.0	2x33pin	33.0	32.0
2x9pin	9.0	8.0	2x34pin	34.0	33.0
2x10pin	10.0	9.0	2x35pin	35.0	34.0
2x11pin	11.0	10.0	2x36pin	36.0	35.0
2x12pin	12.0	11.0	2x37pin	37.0	36.0
2x13pin	13.0	12.0	2x38pin	38.0	37.0
2x14pin	14.0	13.0	2x39pin	39.0	38.0
2x15pin	15.0	14.0	2x40pin	40.0	39.0
2x16pin	16.0	15.0	2x41pin	41.0	40.0
2x17pin	17.0	16.0	2x42pin	42.0	41.0
2x18pin	18.0	17.0	2x43pin	43.0	42.0
2x19pin	19.0	18.0	2x44pin	44.0	43.0
2x20pin	20.0	19.0	2x45pin	45.0	44.0
2x21pin	21.0	20.0	2x46pin	46.0	45.0
2x22pin	22.0	21.0	2x47pin	47.0	46.0
2x23pin	23.0	22.0	2x48pin	48.0	47.0
2x24pin	24.0	23.0	2x49pin	49.0	48.0
2x25pin	25.0	24.0	2x50pin	50.0	49.0

GENERAL TOLERANCE			UNITS mm		NAME: FH		TITLE: FH1.0*2.0 2*XP SMT 展开3.7	
SELECT	TOL	✓	MAT'L		PART NO: FH100***F-01***		DWG NO. ATOM-A00011	
ON	1	2	FINISH		APPD: Vicky		SCALE SHEET	
X.XXX			QTY		CHKD: Emilia		1:1 1/1	
X.XX			DR: Doris		ATOM-AD00011		REV	
X			ANGLE		DWG NO. ATOM-A00011		REV	