

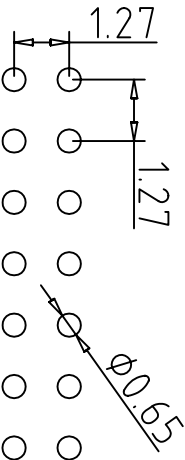
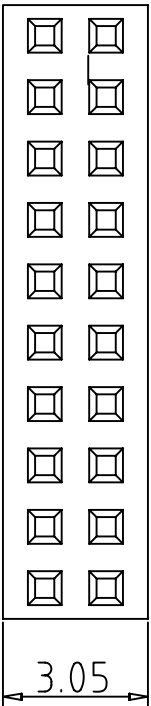


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2009/11/04	/	NEW	Vicky

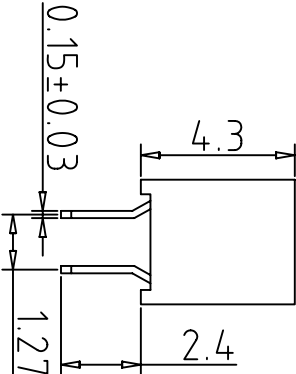


(A+0.4)±0.25

P.C.B. LAYOUT

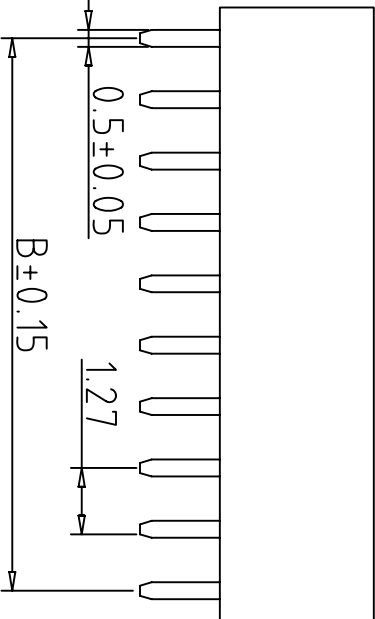

SPECIFICATIONS:

Current Rating: 1Amps
Insulator Resistance: 1000Megohms min
Dielectric withstanding: AC 500V
Operating Temperature: -40°~+85°
Max Processing Temp: 230°for 10~60 seconds
Contact Material: Brass
Insulator Material: PA46 UL94V-0
Plating: Glod 1u"

GENERAL TOLERANCE				UNITS		NAME: FH		ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	✓			mm							
ON.	TOL	1	2	3	MAT'L	PART NO:	TITLE:				
X.XXX				±0.05 ±0.15		FH127***D-06***	FH1.27*4.3 2*XP DIP 180° DC=2.4 W=3.0				
X.XX				±0.15 ±0.13 ±0.25	FINISH	APPD: MIKE	DWG NO.	ATOM-A00168			
X.X				±0.20 ±0.25 ±0.50		CHKD: Vicky					
X.				±0.25 ±1.00	QTY	DR: Doris		SCALE	SHEET	REV	
ANGLE				±0.5°				1:1	1/1	A	