
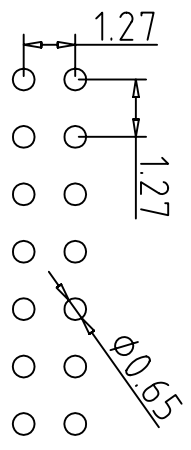
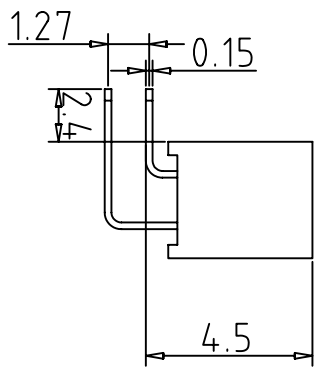
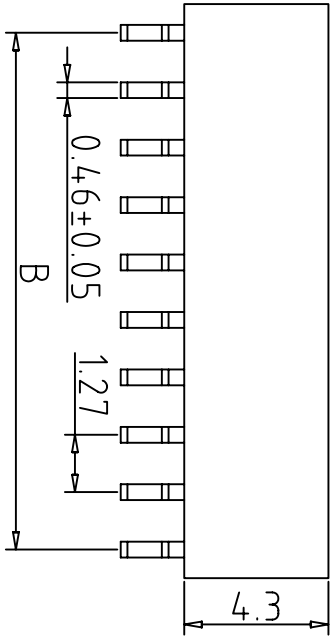


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2011/01/18	/	NEW	Vicky

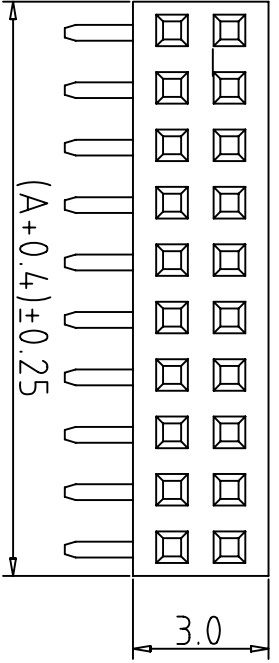

P.C.B. LAYOUT

SPECIFICATIONS:
 Current Rating: 1Amps
 Insulator Resistance: 1000Megohms min
 Dielectric withstanding: AC 500V
 Operating Temperature: -55°~+105°
 Max Processing Temp: 260°for 5-10 seconds
 Contact Material: Brass
 Insulator Material: PA6T UL94V-0
 Plating: Gold 1u"

PIN NO.	A	B	PIN NO.	A	B
2x1pin	2.54	1.27	2x2pin	26.67	25.4
2x2pin	3.81	2.54	2x22pin	27.94	26.67
2x3pin	5.08	3.81	2x23pin	29.21	27.94
2x4pin	6.35	5.08	2x24pin	30.48	29.21
2x5pin	7.62	6.35	2x25pin	31.75	30.48
2x6pin	8.89	7.62	2x26pin	33.02	31.75
2x7pin	10.16	8.89	2x27pin	34.29	33.02
2x8pin	11.43	10.16	2x28pin	35.56	34.29
2x9pin	12.7	11.43	2x29pin	36.83	35.56
2x10pin	13.97	12.7	2x30pin	38.1	36.83
2x11pin	15.24	13.97	2x31pin	39.37	38.1
2x12pin	16.51	15.24	2x32pin	40.64	39.37
2x13pin	17.78	16.51	2x33pin	41.91	40.64
2x14pin	19.05	17.78	2x34pin	43.18	41.91
2x15pin	20.32	19.05	2x35pin	44.45	43.18
2x16pin	21.59	20.32	2x36pin	45.72	44.45
2x17pin	22.86	21.59	2x37pin	46.99	45.72
2x18pin	24.13	22.86	2x38pin	48.26	46.99
2x19pin	25.4	24.13	2x39pin	49.53	48.26
2x20pin			2x40pin	50.8	49.53

GENERAL TOLERANCE		UNITS		NAME: FH		TITLE: FH1.27*4.3 2*XP DIP 90° DC=2.4 W=3.0	
SELECT	TOL	MAT'L	mm	PART NO:	APPD:	DWG NO.	ATOM-A00167
1	2			FH127***C-06***	Vicky		
ON: XXXX	1			CHKD: Ivy		SCALE	SHEET
XXXX	2			DR: Doris		1:1	1/1
XXXX	3						REV
XXXX							A

ATOM 深圳市爱特姆科技有限公司
 SHENZHEN ATOM TECHNOLOGY CO., LTD.