

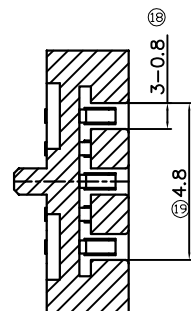
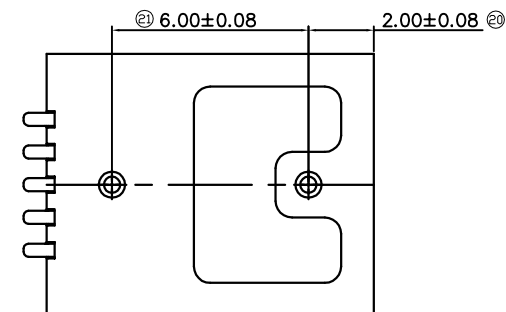
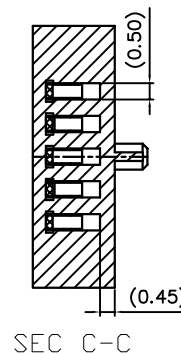
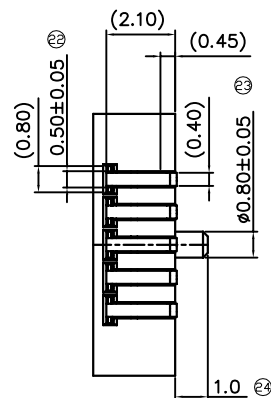
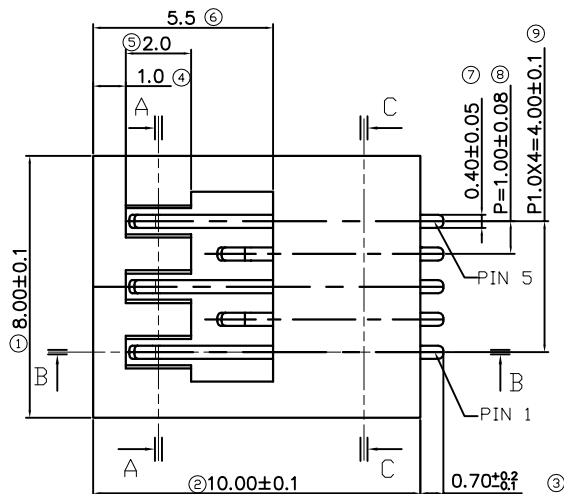



RoHS compliant


REV	DATE	ECN.NO	MODIFICATION	APPROVER
A	2017/05/23		初版发行	JASON

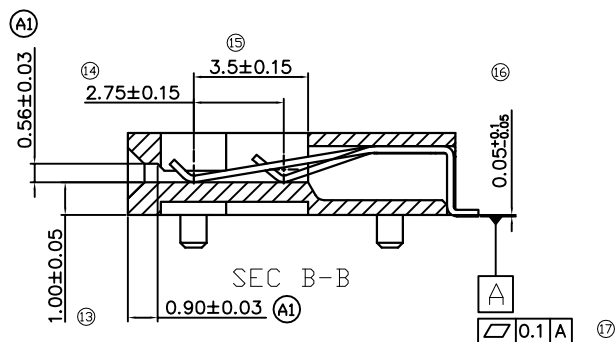


SEC A-A

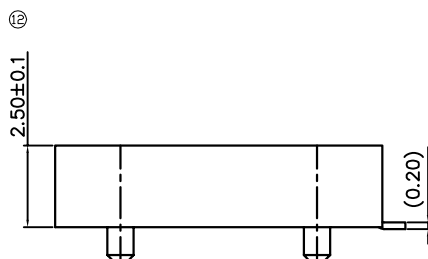

SEC B-B

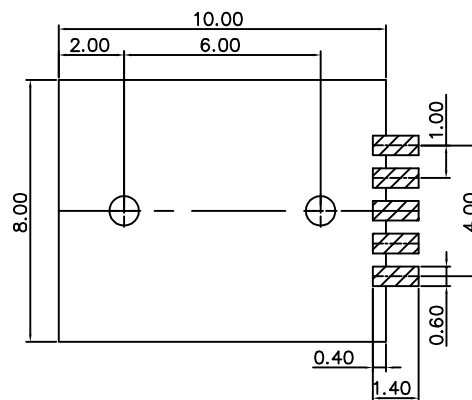

PCB LAYOUT
TOLERANCE:±0.1
LAND METAL MASK t=0.12

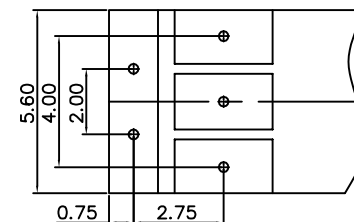

FILM CONTACT LAYOUT
TOLERANCE:±0.1

NOTE

1.MATERIAL

INSULATOR:LCP E471i OR EQUIVALENT
COLOR BLACK,SELF EXTINGUISHING,UL-RATED 94 V-0
CONTACTS:PHOSPHOR BRONZE (C5191R-SH) 0.2t

2,SIGNAL CONTACT PLATING

40~80u"NICKEL UNDERPLATED OVERALL PLATED GOLD (AU 1~3u")

3,GENERAL TOLERANCE: ±0.1

UNITS	mm	NAME:	SPC 5pin	ATOM ® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
MAT'L		PART NO:	GP04C-06200	TITLE: STRIP SOCKET CONNECTOR 5P H=2.5 带定位柱			
FINISH		APPD:	JASON	DWG NO. ATOM-A03458			
Q'TY		CHKD:	VICKY		SCALE	SHEET	REV
		DR:	DAVID		1:1	1 OF 2	A