

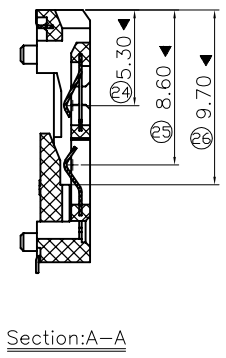
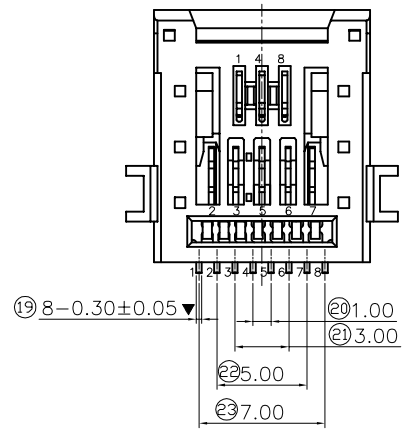
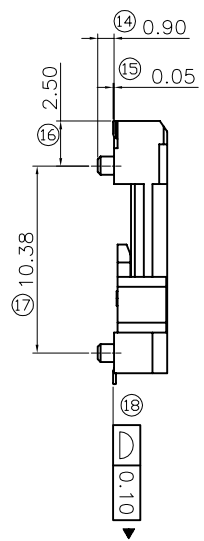
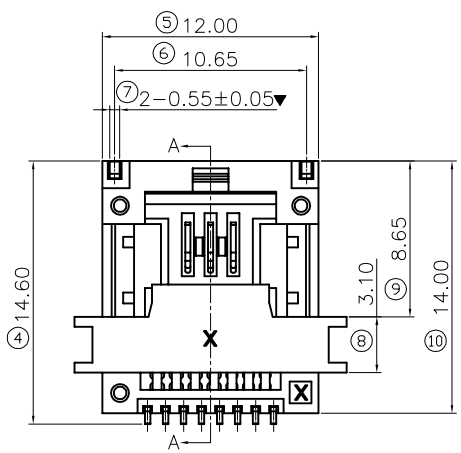
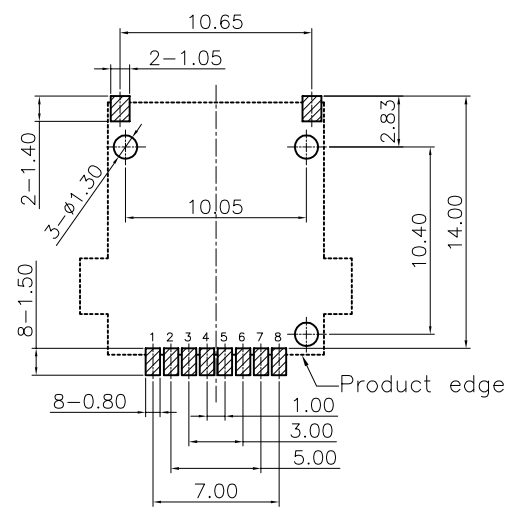
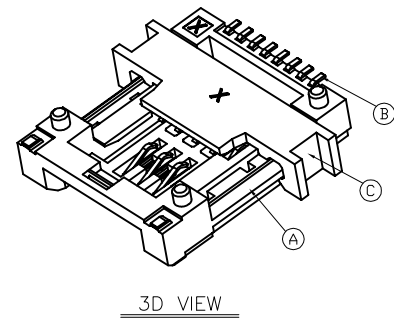


REV.	DATE	ECN NO.	MODIFICATION
A0	2022.10.10	/	NEW

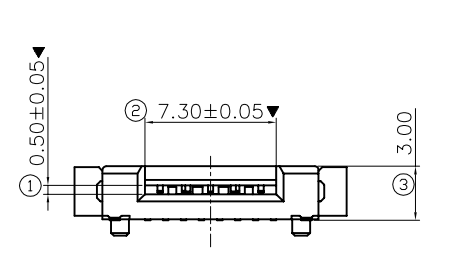

- NOTES:
- Material:
- A.Housing:High temperature plastic
UL94V-0,Color-Black
 - B.Terminal:Phosphor Bronze
 - C.Slider:High temperature plastic
UL94V-0,Color-Black
- 2.Plating of Contact
Contact Area AU 5U"MIN
Soldering Area G/F
- Electrical :
- 1.Rating current: 0.3A
 - 2.Insulation resistance:100MΩ MIN at 500V DC
 - 3.Contact Resistance 50mΩ MAX
 - 4.Withstanding Voltage: 500V AC for 1 minute
- Mechanical:
- 1.Insertion force:1N MAX
 - 2.Withdrawal force:0.2N MIN
 - 3.Mating Cycles : 50000Cycles
- Environment characteristics:
- 1.Operating: - 20°C to +70°C
 - Nonoperating: - 25°C to +85°C
- MAJOR DIMENSION:▼

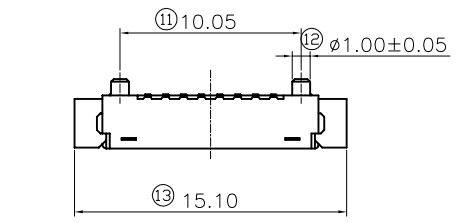

GENERAL TOLERANCE			UNITS mm	NAME(INTENDED USE)
SELECT	TOL.	✓		
ON.	1 2 3		MAT'L	3+5 8Pin 试条插座
X.XXX	±0.10 ±0.15 ±0.20		FINISH	PART NO.(INTENDED USE) GP19A-06200
X.XX	±0.15 ±0.20 ±0.25			APPD:
X.X	±0.20 ±0.25 ±0.30		Q'TY	CHKD:
X.	±0.25 ±0.30 ±0.50			DR: Frank
ANGLE	±2'			

PART NO.(INTENDED USE) GP19A-06200	
APPD:	
CHKD:	
DR: Frank	

ATOM 深圳市爱特姆科技有限公司
SHENZHEN ATOM TECHNOLOGY CO., LTD.

TITLE:
3+5 8Pin 试条插座 H=3.0mm

DWG NO.:
ATOM-A07499

SCALE	SHEET	REV.
1:1	1/1	A0