

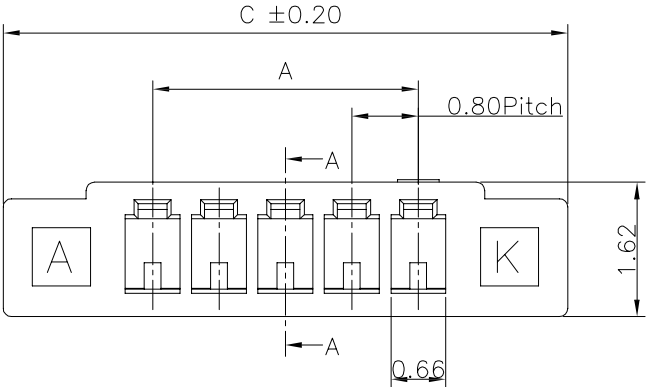
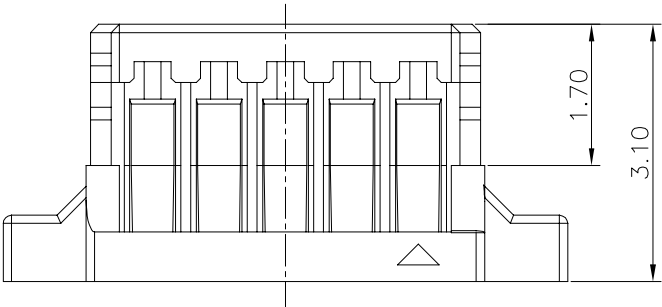



5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
A	2015/06/04	/	NEW
			APPROVER
			Vicky

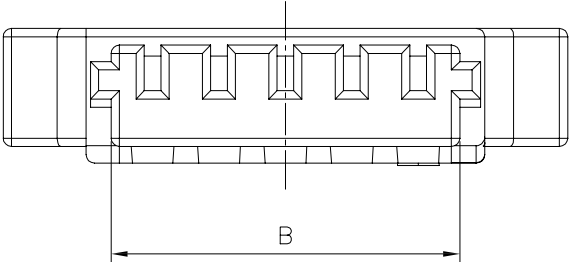

SPECIFICATIONS
Current rating: 0.5A AC, DC
Voltage rating: 30V AC, DC
Temperature range: -25° C ~ +85° C
Insulation resistance: 100M Ω Min.
Withstandin voltage: 200V AC/ minute.
Contact resistance: 20m Ω Max
Material:
Insulator: Nylon 66 UL 94V-0



Pin	A	B	C
2P	0.80	1.80	4.40
3P	1.60	2.60	5.20
4P	2.40	3.40	6.00
5P	3.20	4.20	6.80
6P	4.00	5.00	7.60
7P	4.80	5.80	8.40
8P	5.60	6.60	9.20
9P	6.40	7.40	10.00
10P	7.20	8.20	10.80
11P	8.00	9.00	11.60
12P	8.80	9.80	12.40
13P	9.60	10.60	13.20
14P	10.40	11.40	14.00
15P	11.20	12.20	14.80
16P	12.00	13.00	15.60

GENERAL TOLERANCE				UNITS mm	NAME: HOUSING		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT ON.	✓				MAT'L	PART NO: H□080**-01***	TITLE: HOUSING 0.8 XP 本色 胶芯 不带端子			
TOL.	1	2	3	FINISH			APPD:	Vicky	DWG NO. ATOM-A02796	
X.XXX	±0.10	±0.05	±0.15		Q'TY	CHKD:	Doris		SCALE	SHEET
X.XX	±0.15	±0.13	±0.25	DR:		Jillian	1:1		1/1	A
X.X	±0.20	±0.25	±0.50							
X.		±0.38	±1.00							
ANGLE	±1°									