









5		6		7		8	
REV.	DATE	ECN NO.	MODIFICATION		APPROVER		
A	2015/10/25	/	NEW		Vicky		

SPECIFICATION

1. Rated voltage: 50V AC,DC
2. Rated current: 1.0A AC,DC
3. Withstanding voltage: 500V AC/min
4. Work temperature: -25℃~+85℃
5. Insulation resistance: 100MΩ Min
6. Contact resistance: 30mΩ Max

MATERIAL

1. Housing: PA66, UL94V-0

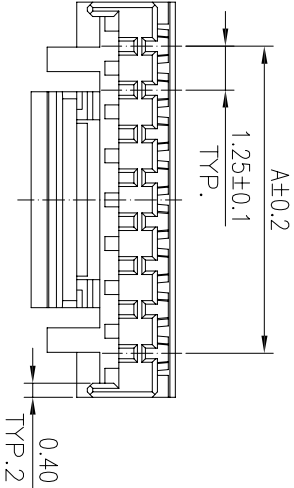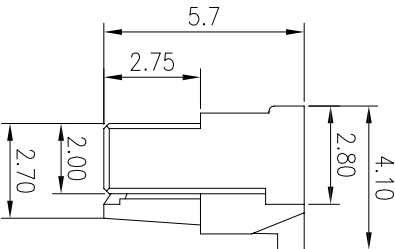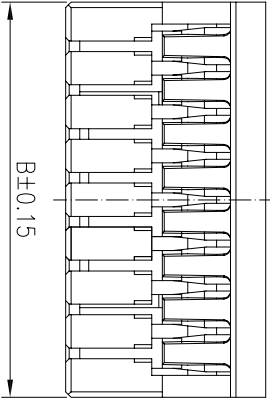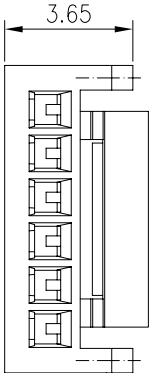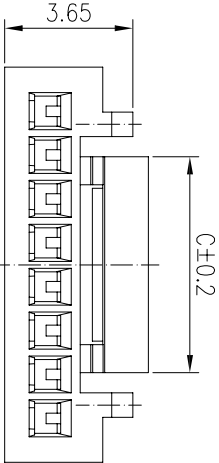

PIN	Dimensions		
	A	B	C
2	1.25	3.85	1.90
3	2.50	5.10	2.90
4	3.75	6.35	4.15
5	5.00	7.50	4.15
6	6.25	8.75	6.15
7	7.50	10.00	6.15
8	8.75	11.25	6.15
9	10.00	12.50	6.15
10	11.25	13.75	8.10
11	12.50	15.00	8.10
12	13.75	16.25	8.10
13	15.00	17.50	8.10
14	16.25	18.75	8.10
15	17.50	20.00	8.10

GENERAL TOLERANCE				UNITS mm		NAME: HOUSING	
SELECT				MAT'L		PART NO: HO125***-06***	
TOL ON	1	2	3	FINISH		APPD: Vicky	
X.XXX	±0.08	±0.05	±0.15	QTY		CHKD: Doris	
X.XX	±0.15	±0.13	±0.25			DR: Cmy	
X.X	±0.25	±0.25	±0.50				
X.		±0.38	±1.00				
ANGLE	±1°	±2°					

				深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
TITLE: HOUSING 1.25 XP 带扣 白色							
DWG NO. ATOM-A03070							
		SCALE 1:1		SHEET 1/1		REV A	