


5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
A	2013/01/09	/	NEW
			APPROVER
			Vicky


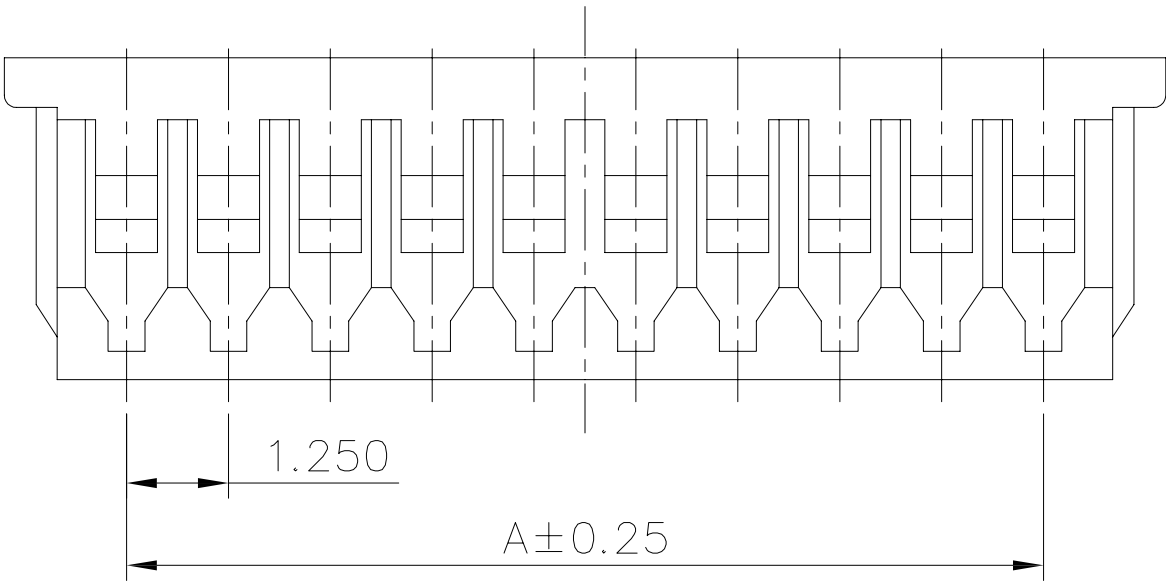


SPECIFICATION


1. Rated voltage: 125V AC,DC
2. Rated current: 1.0A AC,DC
3. Withstanding voltage: 250V AC/min
4. Work temperature: -25℃~+85℃
5. Insulation resistance: 100MΩ Min
6. Contact resistance: 20mΩ Max

MATERAIL

1. Housing: PA66, UL94V-0

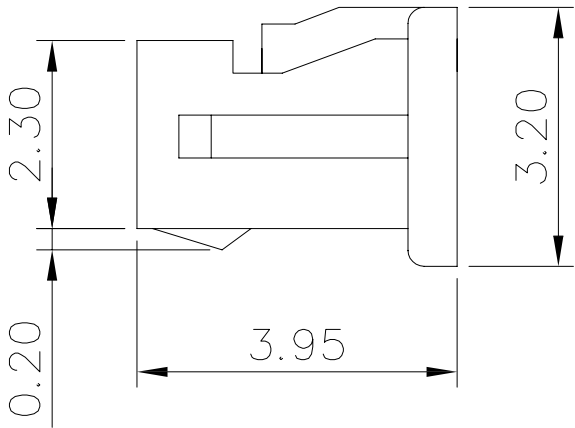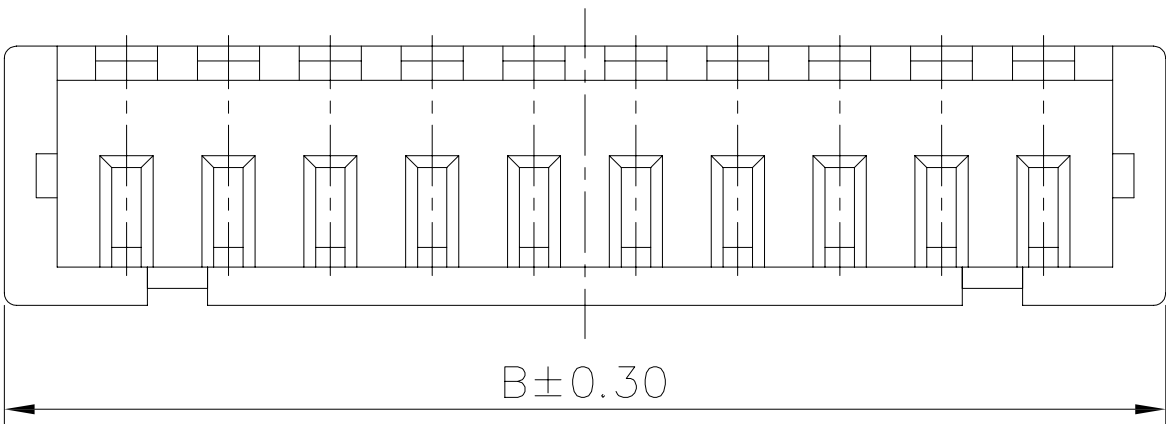

PIN NO.	DIMENSIONS	
	DIM A	DIM B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75

GENERAL TOLERANCE				UNITS mm	NAME: HOUSING		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT					MAT'L	PART NO: HO125**—01***		TITLE: HOUSING 1.25 XP PA66 白色 胶芯		
TOL. ON.	1	2	3	FINISH		APPD: Vicky		DWG NO. ATOM—A02787		
X.XXX	±0.10	±0.05	±0.15		Q'TY	CHKD: Doris			SCALE	SHEET
X.XX	±0.20	±0.13	±0.25	DR: Cmy		1:1	1/1		A	
X.X	±0.30	±0.25	±0.50							
X.		±0.38	±1.00							
ANGLE	±1°	±2°								