
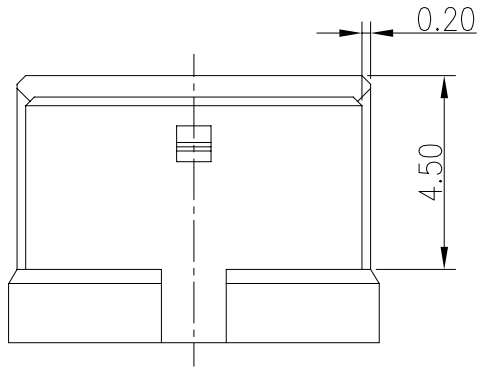


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2015/06/01	/	NEW	Vicky

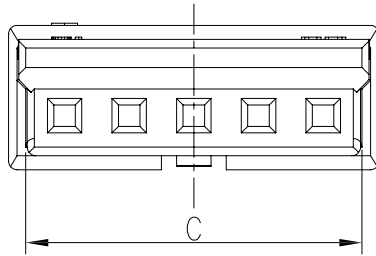

SPECIFICATIONS

Current rating; 2.5A AC,DC

Voltage rating: 350v AC,DC

Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$



Insulation resistance: 1000M Ω Min

withstanding voltage: 500V AC/minute

contact resistance: 20m Ω Max

Material:Insulator: Nylon 66 UL94V-0

Dimensions			
Pin	A	B	C
2P	1.50	4.10	3.30
3P	3.00	5.60	4.80
4P	4.50	7.10	6.30
5P	6.00	8.60	7.80
6P	7.50	10.10	9.30
7P	9.00	11.60	10.80
8P	10.50	13.10	12.30
9P	12.00	14.60	13.80
10P	13.50	16.10	15.30
11P	15.00	17.60	16.80
12P	16.50	19.10	18.30
13P	18.00	20.60	19.80
14P	19.50	22.10	21.30
15P	21.00	23.60	22.80

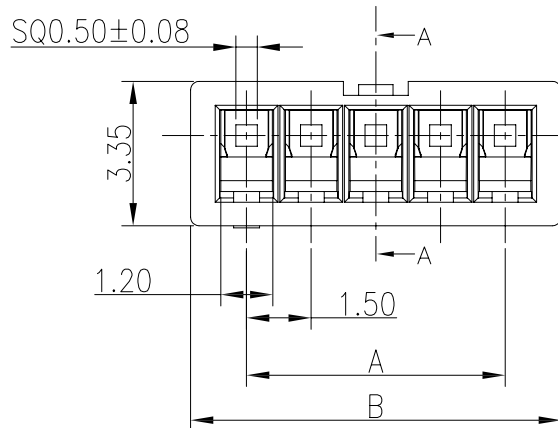

GENERAL TOLERANCE				UNITS	mm	NAME:	HOUSING	ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	TOL.	1	2	3	MAT'L	PART NO:	HO150**-01***	TITLE: HOUSING 1.5 XP PA66 白色 无扣胶芯			
X.XXX	±0.10	±0.05	±0.15		FINISH	APPD:		DWG NO. ATOM-A03405			
X.XX	±0.20	±0.13	±0.25		Q'TY	CHKD:	Vicky				
X.X	±0.30	±0.25	±0.50			DR:	Doris				
X.		±0.38	±1.00					SCALE	SHEET	REV	
ANGLE	±2'							1:1	1/1	A	