

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2012/10/25	/	NEW	Vicky

SPECIFICATIONS

Applicable Wire: AWG#24~#20

Rating voltage: 250V DV, AC (rms)

Rating current: 5A

Withstand voltage: 1000V AC/min.





Working Temp: -40°C~+105°C

Insulation resistance: 1000MΩ


Contact resistance: 10mΩ

MATERIAL

Housing: Nylon66, UL94V-0

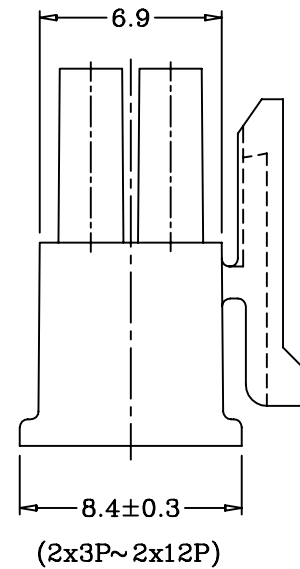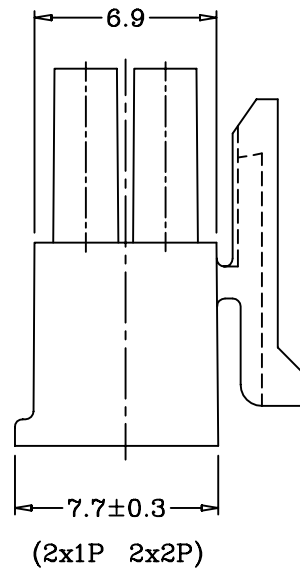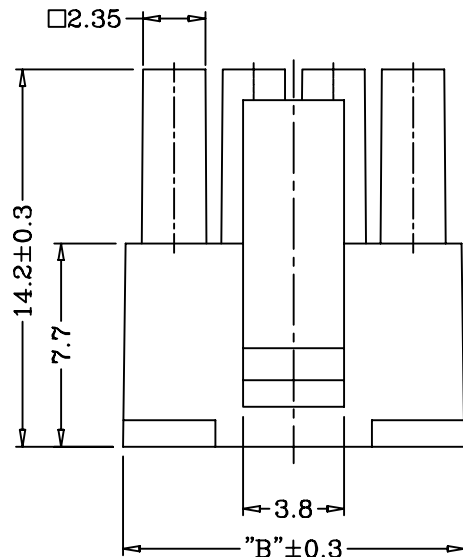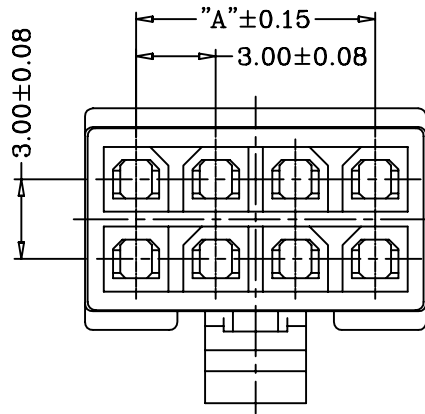

PIN NO.	A	B
2X1	—	3.85
2X2	3.00	6.85
2X3	6.00	9.85
2X4	9.00	12.85
2X5	12.00	15.85
2X6	15.00	18.85
2X7	18.00	21.85
2X8	21.00	24.85
2X9	24.00	27.85
2X10	27.00	30.85
2X11	30.00	33.85
2X12	33.00	36.85

GENERAL TOLERANCE				UNITS		NAME:		HOUSING		ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓			mm		MAT'L	PART NO:	TITLE: HOUSING 3.0 2*XP PA66 黑色 胶芯 公壳					
TOL. ON:	1	2	3										
X.XXX		±0.05	±0.15	FINISH		APPD:	Vicky	DWG NO. ATOM-A01865					
X.XX	±0.15	±0.13	±0.25 <th rowspan="2">CHKD:</th> <th rowspan="2">Emilia</th>									CHKD:	Emilia
X.X	±0.25	±0.25	±0.50	Q'TY		DR:	Anna	 SCALE 1:1 SHEET 1/1 REV A					
X.	±0.30	±0.38	±1.00										
ANGLE	±3°												