


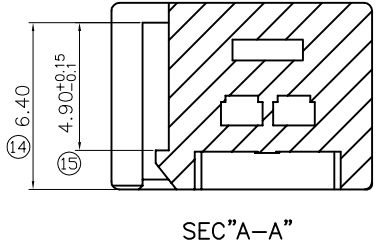
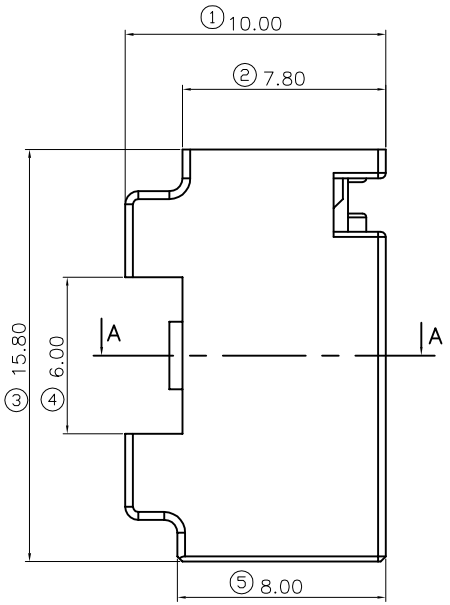


5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
A0	2025.10.22	/	NEW
			APPROVER
			Allen

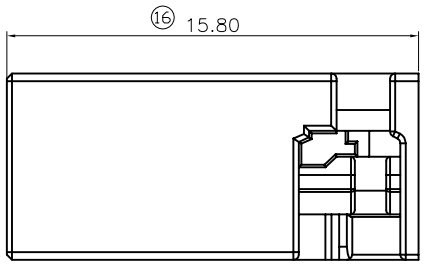

NOTE :
1.MATERIAL SPECIFICATION,
1-1.HOUSING:PBT.UL94 V-0.
2.ELECTRICAL PERFORMANCE,
2-1.RATED VOLTAGE ;AC/DC,48V
2-2.RATED CURRENT ;2.0A
2-3.WITHSTAND VOLTAGE:1000V AC FOR 1 MINUTE,
2-4.CONTACT RESISTANCE: 10mΩ MAX.
2-5.INSULATION RESISTANCE:200 MΩ MIN.
2-6.APPLICABLE WIRE RANGE:AWG22~AWG24
2-7.TEMPERAURE RANGE:-40°C~+85°C
3.THE HOUSING AND MATED TERMINAL TO
USE WITH 0.50mm SQUARE P


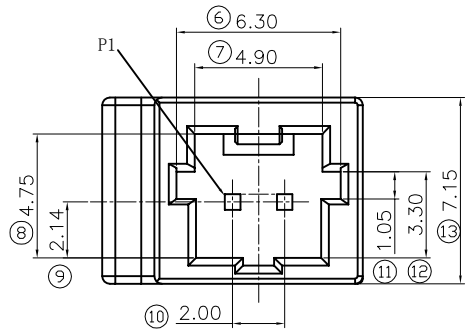


PART NO.
HO20002-30400
产品代码Ho:Housing简写
产品间距:2.0mm
产品Pin位:02
预留码
1表示管装,2表示卷装
3.表示盘装,4表示袋装,
5.表示盒装
30:产品特性码

GENERAL TOLERANCE				UNITS mm	NAME(INTENDED USE)		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.		
SELECT	TOL.	1	2	3	MAT'L	Housing 2.0 胶壳	TITLE:		
ON.						PART NO.(INTENDED USE)	Housing 2.0 2P 线对线带内扣胶壳		
X.XXX	±0.10	±0.15	±0.20		FINISH	HO20002-30400	DWG NO.: ATOM-A11559		
X.XX	±0.15	±0.20	±0.25			APPD:			
X.X	±0.20	±0.25	±0.30			CHKD:			
X.	±0.25	±0.30	±0.50		Q'TY	DR: Allen			
ANGLE	±2°								
							SCALE SHEET REV.		
							1:1 1/1 A0		


5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
AO	2025.10.22	/	NEW
			APPROVER
			Allen

NOTES:
1.CONTACT MATERIAL: COPPER ALLOY T:0.20mm
2.APPLICABLE WIRE RANGE:AWG 22~AWG24
3. PRODUCTS COMPLY WITH ROHS STANDARDS

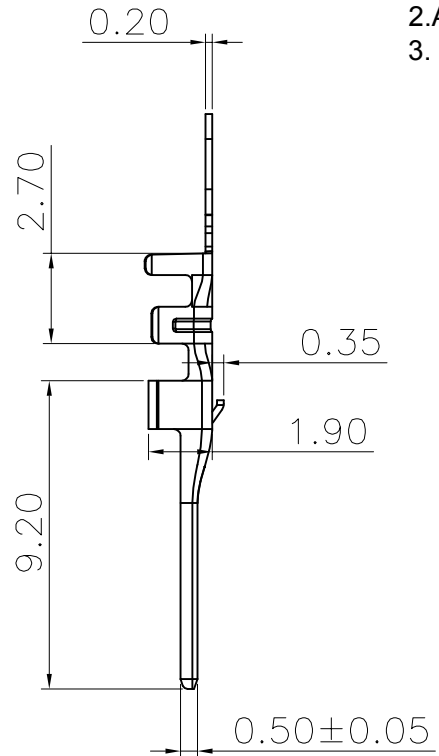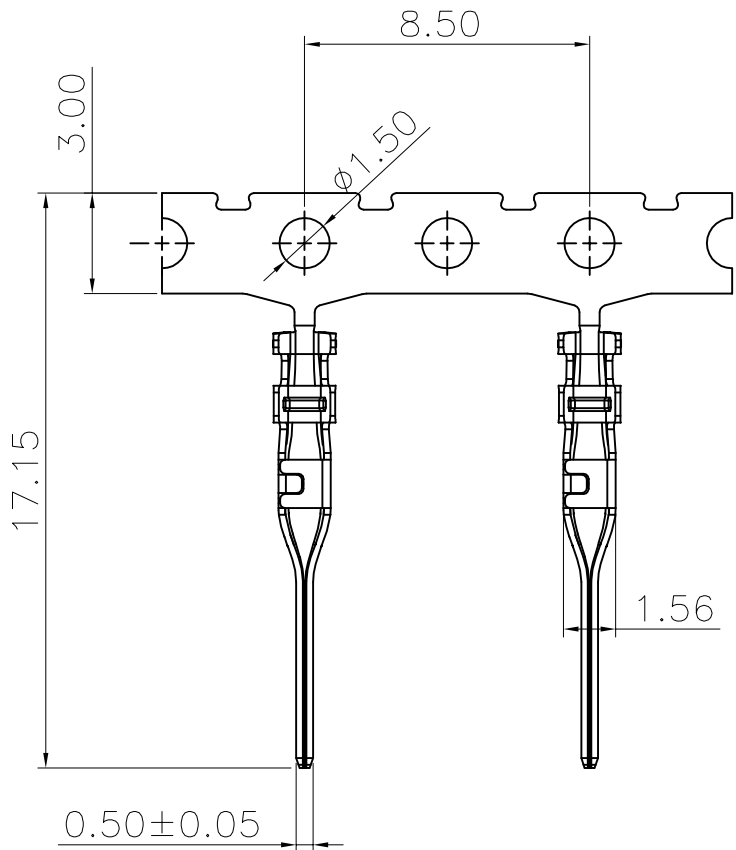

产品代码TR:Terminal简写
产品间距:2.0mm
04:公端
01:磷铜
93:镀镍底镀锡

TR200040193202
02: 序号码
2: 表示卷装

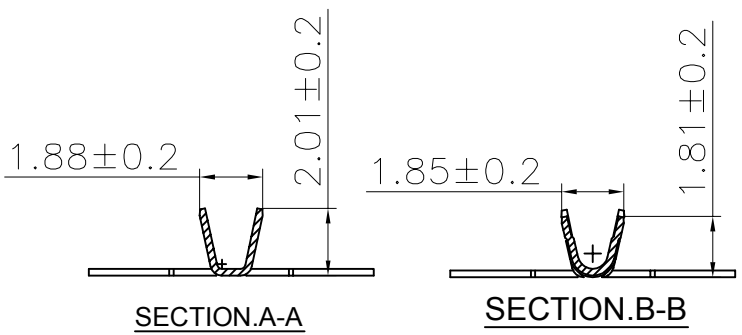

GENERAL TOLERANCE				UNITS mm	NAME(INTENDED USE) TERMINAL	ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT TOL. ON.	1	2	✓ 3			PART NO.(INTENDED USE) TR200040193202	TITLE: 2.0mm 带内扣 铆线端子		
X.XXX	±0.10	±0.15	±0.20	FINISH	APPD:	DWG NO.: ATOM-A11560			
X.XX	±0.15	±0.20	±0.25		Q'TY	CHKD:			
X.X	±0.20	±0.25	±0.30		DR: Allen		SCALE	SHEET	REV.
X.	±0.25	±0.30	±0.50		ANGLE		±2°	1:1	1/1