
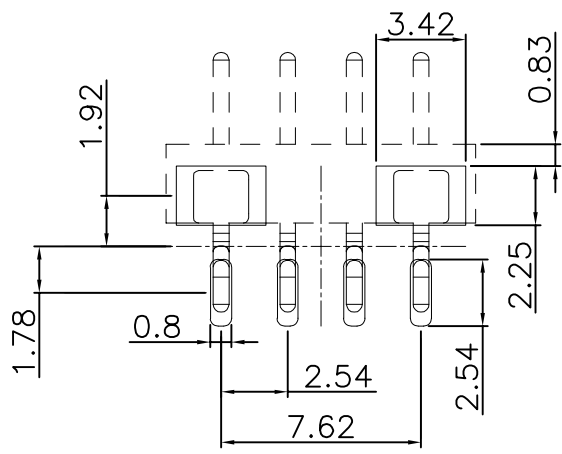
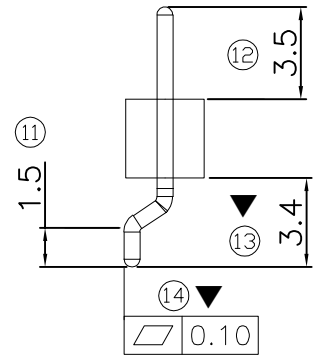
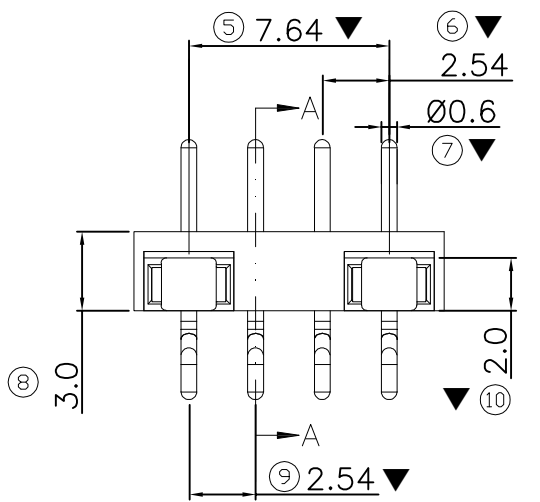


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A0	2021.7.28		NEW	Jason

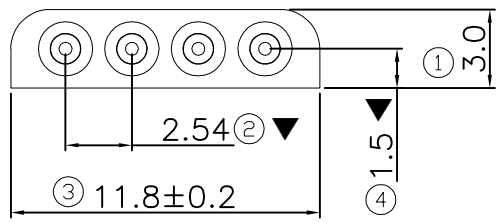

RECOMMENDED PCB LAYOUT  
TOLERANCE:±0.05mm

Technical Data

Material:

Pin(outer sleeve):Copper alloy

Plating(outer sleeve):

Gold Plated: Nickel Plating, gold-plated

Insulator:Thermoplastic UL94V-0 Beige

Clp(Contact 4 Flnger):Beryllium copper,heat teated

Mating pinφ:0.40mm/0.66mm

Electrical:

Current rating:3Amps/contact max.


Contact resistance:Max.10mΩ

Dlelectric strength:Min.1000V

Operaling temperature:-40° C to+105° C

Major Dimension:▼

Lead free and ROHS compliant product

GENERAL TOLERANCE			UNITS mm	NAME(INTENDED USE) PH	 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.
SELECT	✓				
ON.	1	2	3	APPD: Abel	DWG NO.: ATOM-A06915
X.XXX	±0.10	±0.15	±0.20		
X.XX	±0.15	±0.20	±0.25	DR: XCF	SHEET 1/1
X.X	±0.20	±0.25	±0.30		
X.	±0.25	±0.30	±0.50		