
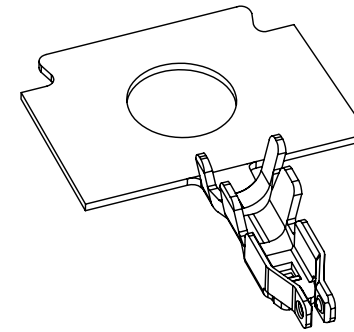
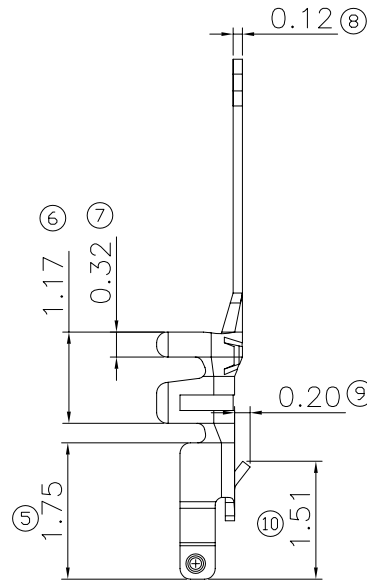


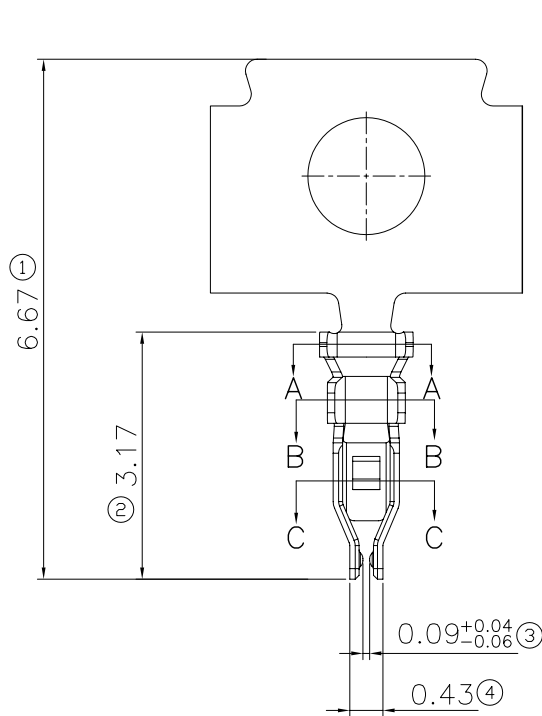

3D示图 (SCALE . 1:1)

SPECIFICATIONS

Rated voltage: 50V DC/AC

Rated current: 1.5A(28AWG),
1.0A(30AWG) AC,DC

Withstand voltage: 500V AC/minute

Working Temperature: -25°C~+85°C

Contact resistance: 20mΩ Max


MATERIAL

Material: Copper Alloy


Finish: Gold Flash over Nickel

Applicable Wires:AWG#28~#30


Insulation O.D.:0.75mm MAX




SECTION.A-A



SECTION.B-B



SECTION.C-C

GENERAL TOLERANCE				UNITS	NAME(INTENDED USE)		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.				
SELECT	✓			mm	MAT'L	1.2mm 单排 铆线端子	TITLE: CUSTOMER DRAWING FOR 1.2mm 单排 铆线端子				
TOL. ON.	1	2	3			PART NO.(INTENDED USE) TR12001303					
X.XXX	±0.15	±0.05	±0.15	FINISH	APPD: JASON	DWG NO.: ATOM-A05480					
X.XX	±0.20	±0.13	±0.25							CHKD: ABEL	
X.X	±0.25	±0.25	±0.50	Q'TY	DR: TOM			SCALE	SHEET	REV.	
X.	±0.30	±0.38	±1.00						1:1	1/1	A
ANGLE	±3°										