


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2015/07/07	/	NEW	Vicky
B	2020/09/21	/	外壳脚尺寸变更	CHENG

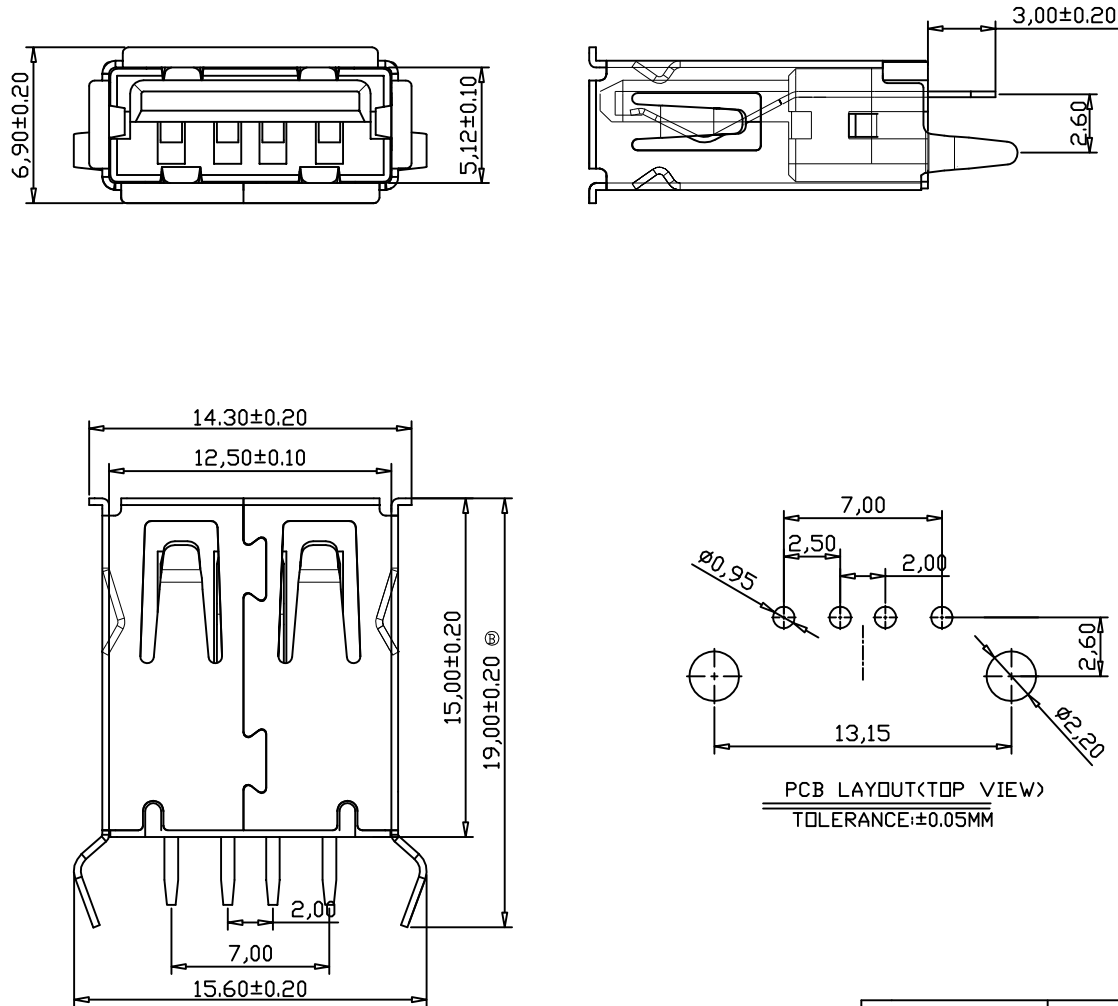

SPECIFICATIONS

1)Electrical:

- 1.1 Contact Resistance: 30 mΩ Max
- 1.2 Insulation Resistance: 1000MΩ Min
- 1.3 Withstanding Voltage: 500V DC
- 1.4 Current rating 1.5AMP Max.
- 1.5 Total Mating Force: 3.57kg Max.
- 1.6 Total Unmating force: 0.7kg Min.
- 1.7temperature Range: -25° +75°

2)Material:

- 2.1 Housing: High temperature Plastics UL94V-0
- 2.2 SHELL: SPCC OR BRASS
- 2.3 Contact: Brass

3)Finishing:

- 3.1 plating: Au or Sn Over 100u" Ni
- 3.2 Crimp Terminal :Gold-plating
- 3.2 Shell:Nickel-plating

GENERAL TOLERANCE				UNITS mm	NAME: USB		ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.		
SELECT	✓				PART NO: USB304FA-B1005***		TITLE: USB A/F 4P DIP 180° 外壳弯脚 L=15.0		
TOL.	1	2	3	MAT'L	APPD: Vicky		DWG NO. ATOM-A03176		
ON.	1	2	3		CHKD: Doris				
X.XXX		±0.05	±0.15	FINISH	DR: Jillian				
X.XX	±0.20	±0.13	±0.25						
X.X	±0.25	±0.25	±0.50	Q'TY					
X.	±0.30	±0.38	±1.00						
ANGLE	±2°					SCALE 1:1	SHEET 1/1	REV A	