



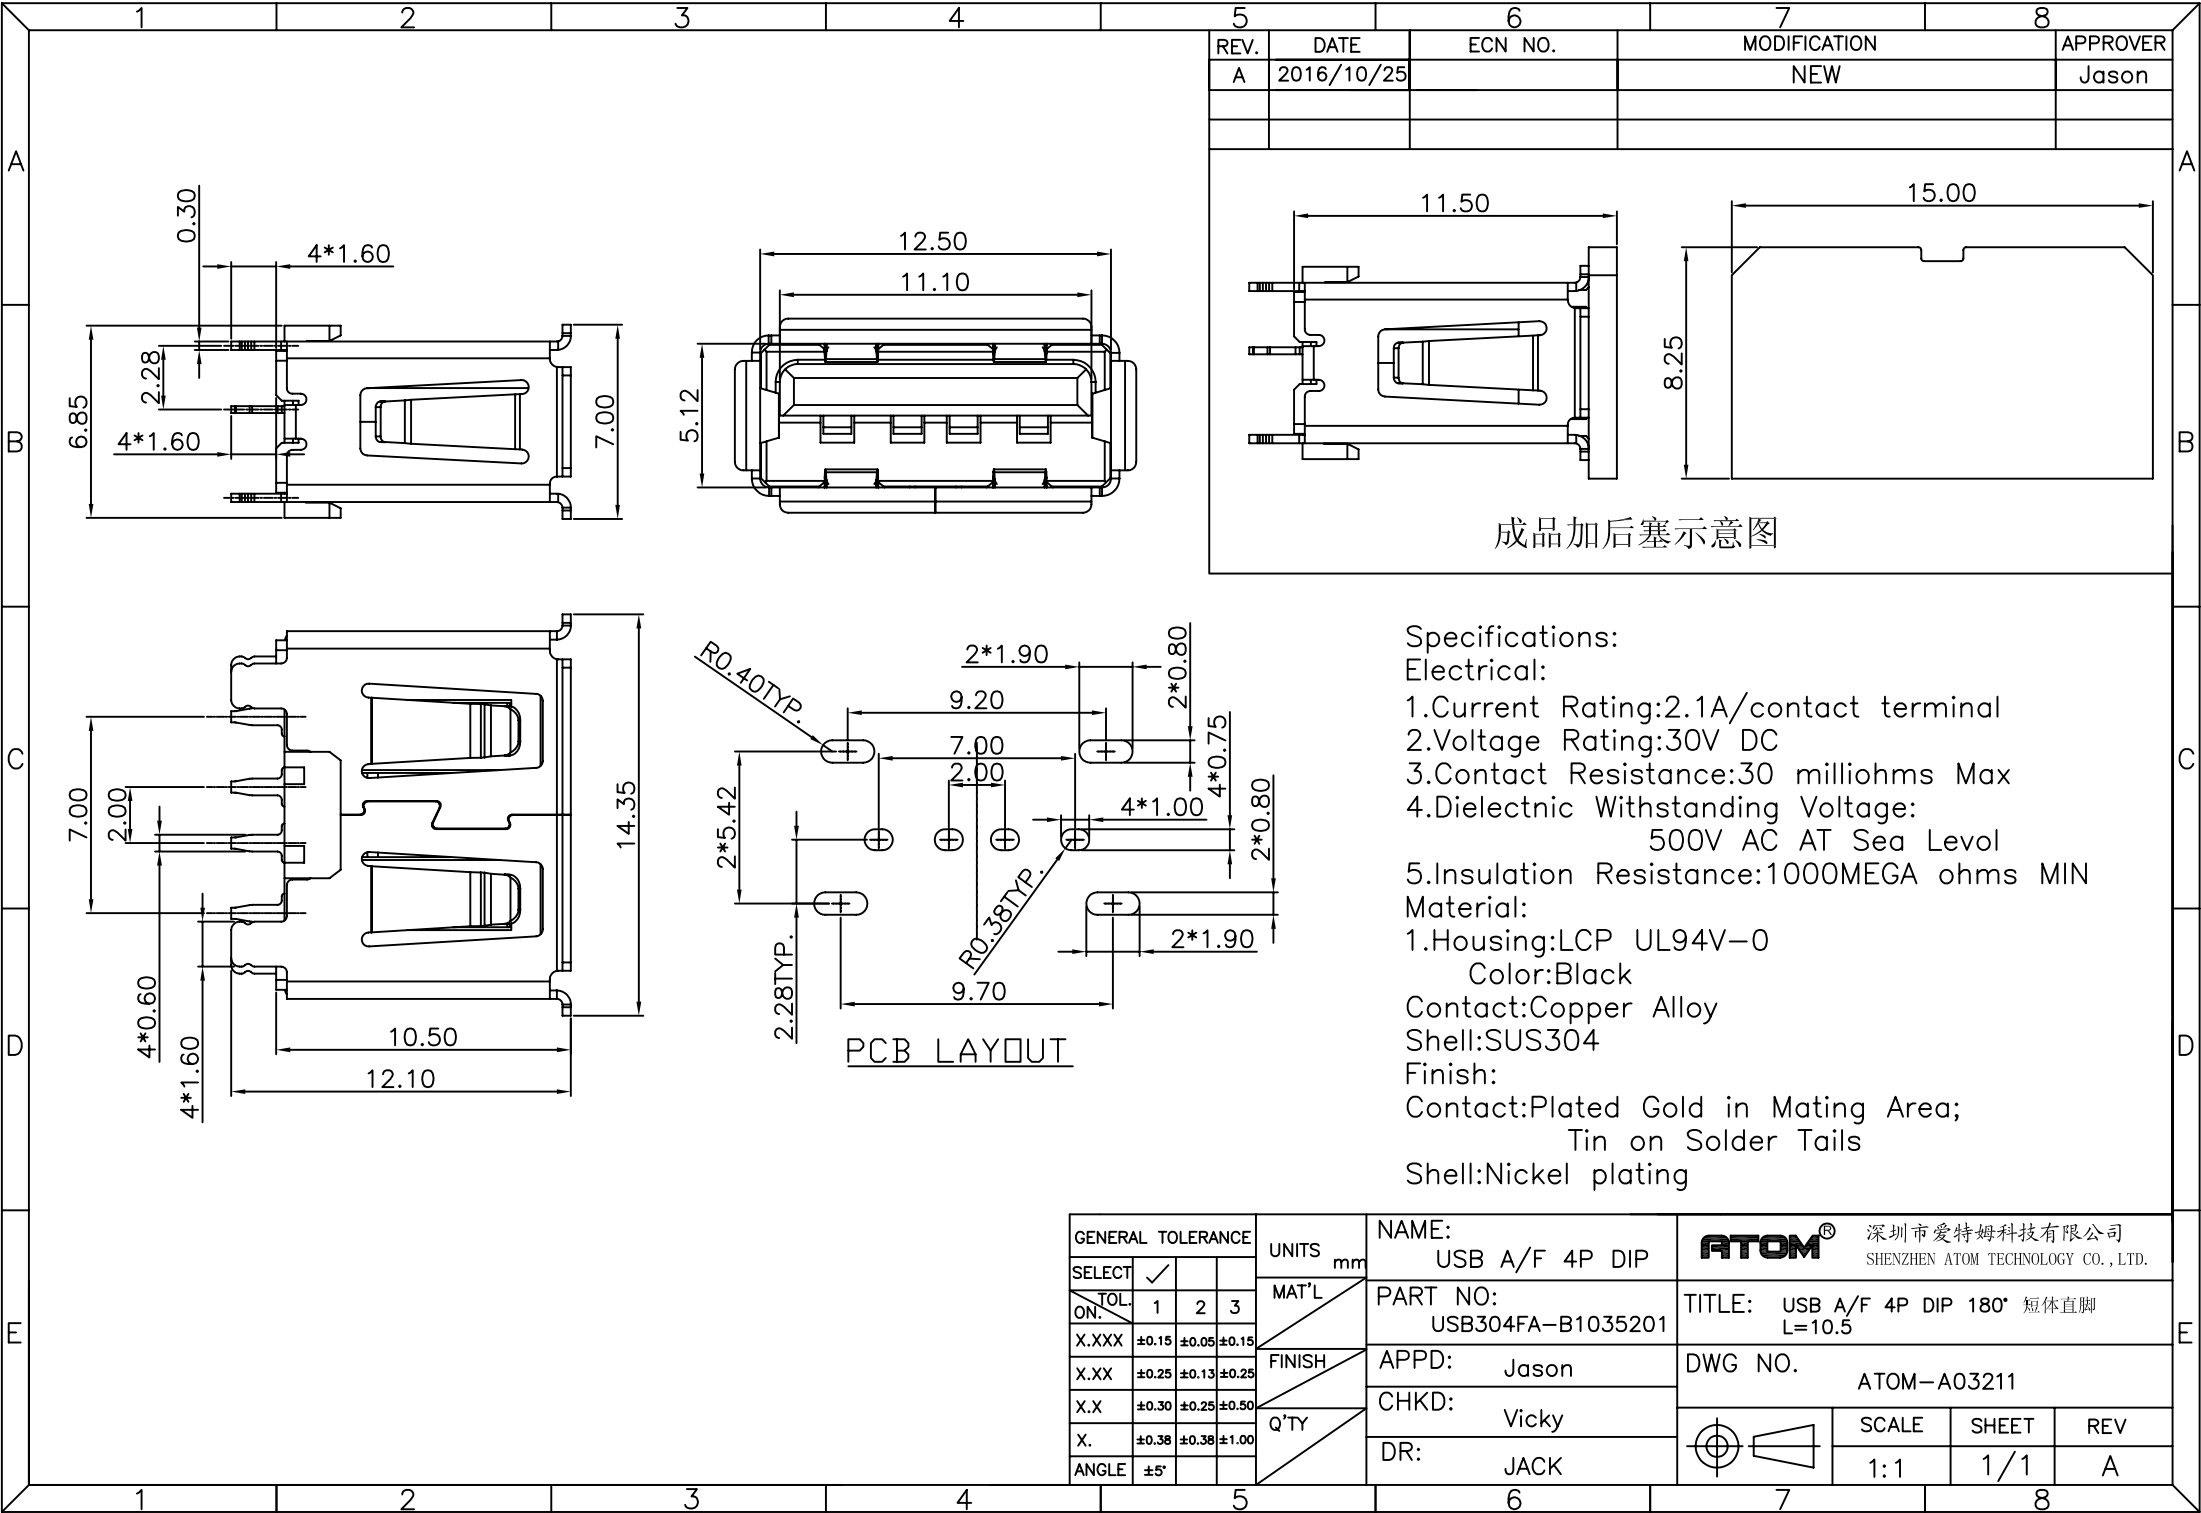

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2016/10/25		NEW	Jason

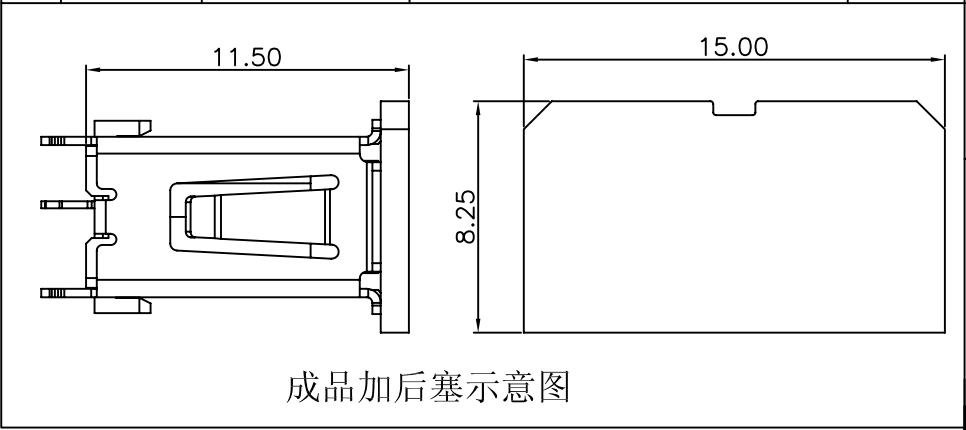


Specifications:

Electrical:

- 1.Current Rating:2.1A/contact terminal
- 2.Voltage Rating:30V DC
- 3.Contact Resistance:30 milliohms Max
- 4.Dielectnc Withstanding Voltage:
500V AC AT Sea Level
- 5.Insulation Resistance:1000MEGA ohms MIN

Material:

1.Housing:LCP UL94V-0
Color:Black
Contact:Copper Alloy
Shell:SUS304
Finish:
Contact:Plated Gold in Mating Area;
Tin on Solder Tails
Shell:Nickel plating

GENERAL TOLERANCE				UNITS mm	NAME: USB A/F 4P DIP		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓				MAT'L	PART NO: USB304FA-B1035201	TITLE: USB A/F 4P DIP 180° 短体直脚 L=10.5			
TOL. ON.	1	2	3	FINISH			APPD: Jason	DWG NO. ATOM-A03211		
X.XXX	±0.15	±0.05	±0.15		Q'TY	CHKD: Vicky		SCALE	SHEET	REV
X.XX	±0.25	±0.13	±0.25	DR: JACK		1:1		1/1	A	
X.X	±0.30	±0.25	±0.50							
X.	±0.38	±0.38	±1.00							
ANGLE	±5°									
5				6		7		8		