
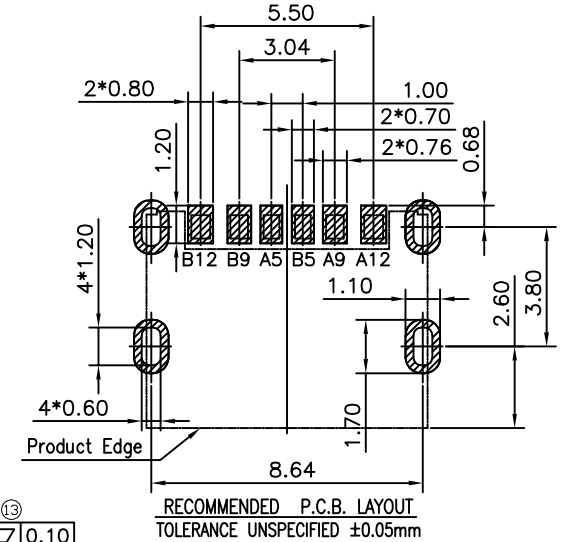
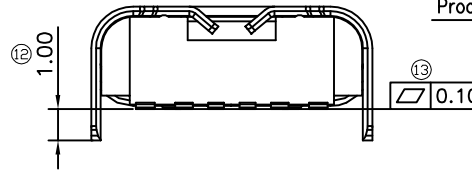
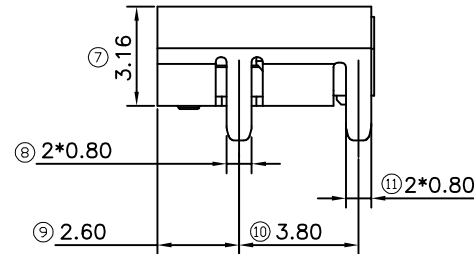
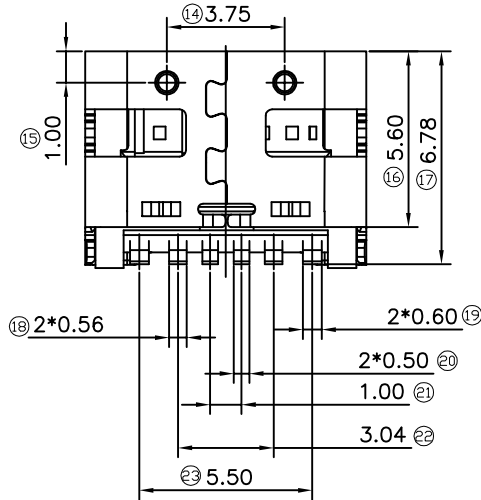
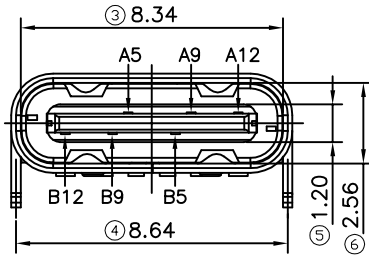


REV.	DATE	ECN.NO	MODIFY.CONTENT	APPROVER
A	2018.09.24		初版发行	JASON



NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

MATERIAL

1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC Black.

2.CONTACTS:COPPER ALLOY

3.MID PLATE:STAINLESS STEEL

4.SHELL:STAINLESS STEEL

PLATING:

1.Au plated on contact area,Tin plated on solder area ,Ni under plated.

LEAD FREE AND ROHS SOMPLIANT PRODUCT.

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME


GENERAL TOLERANCE				UNITS	mm
SELECT	TOL	1	2	3	MAT'L
ON					
X.XXX	±0.10	±0.05	±0.15		
X.XX	±0.25	±0.13	±0.25		
X.X	±0.30	±0.25	±0.50		
X.		±0.38	±1.00		
ANGLE	±3°				

NAME(INTENDED USE)	
USB	
PART NO.(INTENDED USE)	
USB606FC-C2014202	
APPD:	Jason
CHKD:	Abel
DR:	Jessica

ATOM®深圳市爱特姆科技有限公司
SHENZHEN ATOM TECHNOLOGY CO.,LTD

TITLE: Customer' drawing for USB TYPE-C 6P
FEMALE SMT 单排 外壳脚长1.0 四脚插板 L=6.80

DWG NO.: ATOM-A05554



SCALE	SHEET	REV.
1:1	1/2	A