
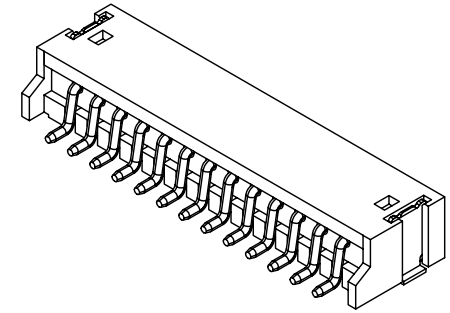
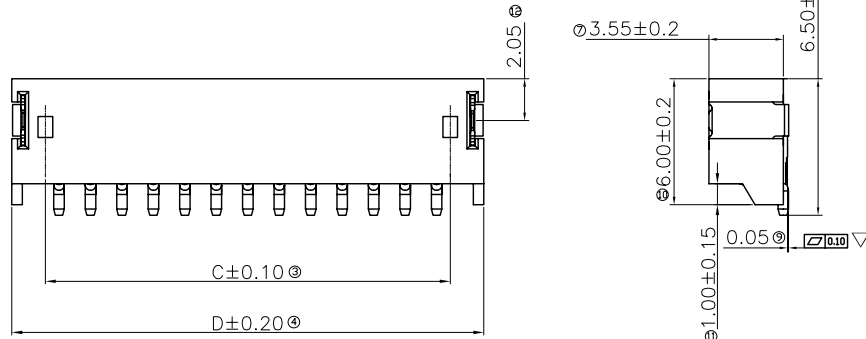




REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A0	2018.01.06	/	新增资料	JASON
		/		

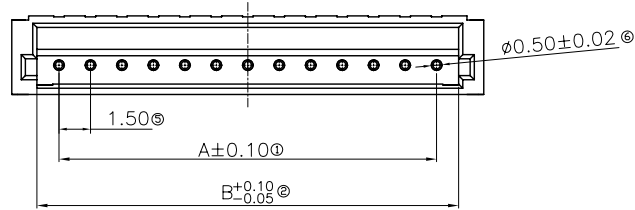

规格:

Specifications:

- 额定电流: 1A AC/DC (使用AWG#26时)
Current rating:1A AC/DC (AWG#26)
- 额定电压: 125V AC/DC
Voltage rating:125V AC/DC
- 使用温度范围: -25℃~+85℃ (含通电时温度上升)
Temperature range:-25℃~+85℃
(including temperature rise in applying electrical current)
- 接触电阻: 初期 / 20 mΩ 以下
环境试验后/30 mΩ 以下
Contact resistance:Initial value/10mΩ max
After environmental tests/30 mΩ max
- 绝缘电阻: 初期/500MΩ 以上
Insulation resistance:500 MΩ min
- 耐电压: AC 500V/1分钟
Withstanding voltage:500VAC/minute
- 适用电线范围: AWG#32~#26
Applicable wire:AWG#32 to #26
- 适合的印刷电路板厚度: 0.6mm、1.2mm、1.6mm
Applicable PC board thickness:0.6mm、1.2mm、1.6mm
- 主体材料: Thermoplastic,UL94-V0, 天然色
Housing material:Thermoplastic,UL94-V0, natural
- 端子材料: 黄铜, 镀锡
Terminal material:brass,plating Tin
12. KEY CHARACTERISTICS OF THE PRODUCT:▽

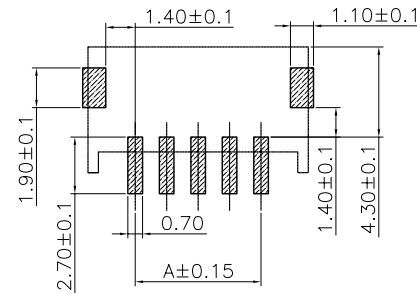

PCB LAYOUT

极数	尺寸			
	A	B	C	D
2	1.50	3.60	2.80	6.00
3	3.00	5.10	4.30	7.50
4	4.50	6.60	5.80	9.00
5	6.00	8.10	7.30	10.50
6	7.50	9.60	8.80	12.00
7	9.00	11.10	10.30	13.50
8	10.50	12.60	11.80	15.00
9	12.00	14.10	13.30	16.50
10	13.50	15.60	14.80	18.00
11	15.00	17.10	16.30	19.50
12	16.50	18.60	17.80	21.00
13	18.00	20.10	19.30	22.50
14	19.50	21.60	20.80	24.00
15	21.00	23.10	22.30	25.50

GENERAL TOLERANCE				UNITS mm		NAME(INTENDED USE)		ATOM®深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓			MAT'L		WAFER 1.5 PITCH SMT		TITLE:			
ON.	TOL.	1	2	3	FINISH		PART NO.(INTENDED USE)		WF150**-01***		
X.XXX	±0.15	±0.05	±0.15		Q'TY		APPD:		DWG NO.:		
X.XX	±0.25	±0.13	±0.25		CHKD:		DR:		ATOM-A03814		
X.X	±0.30	±0.25	±0.50		SCALE		SHEET		REV.		
X.	±0.38	±0.38	±1.00		1:1		1/1		A0		
ANGLE	±5°										