
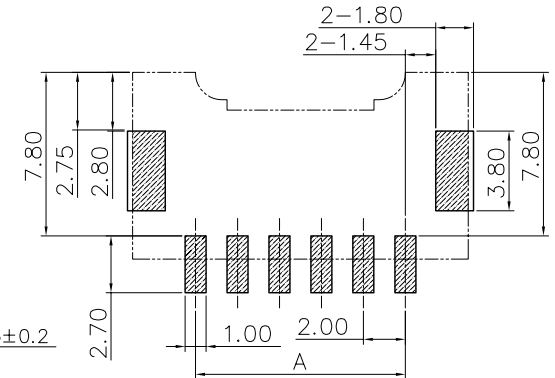
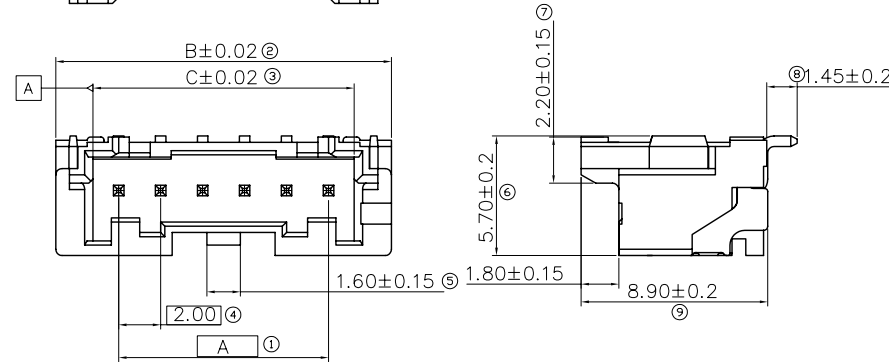



ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2017.12.12	/	新增资料	JASON

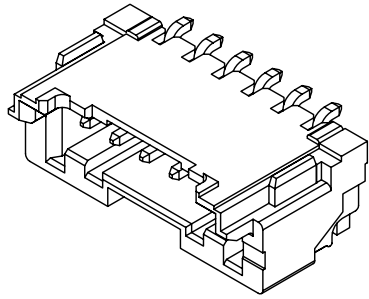


PCB LAYOUT


规格:

Specifications:

- 额定电流: 3A AC/DC (使用AWG#22时)
Current rating:3A AC/DC (AWG#22)
- 额定电压: 250V AC/DC
Voltage rating:250V AV/DC
- 使用温度范围: -25℃~+85℃ (含通电时温度上升)
Temperature range:-25℃~+85℃
(including temperature rise in applying electrical current)
- 接触电阻: 初期 / 10 mΩ 以下
环境试验后/ 20 mΩ 以下
Contact resistance:Initial value/10mΩ max
After environmental tests/20 mΩ max
- 绝缘电阻: 初期/1000MΩ 以上
Insulation resistance:1000 MΩ min
- 耐电压: AC 800V/1分钟
Withstanding voltage:800VAC/minute
- 适用电线范围: AWG#28~#22
Applicable wire:AWG#28 to #22
- 适合的印刷电路板厚度: 1.6mm
Applicable PC board thickness:1.6mm
- 主体材料: NYLON, UL94-V0, 天然色
Housing material:NYLON, UL94-V0, natural
- 端子材料: 黄铜, 镀锡
Terminal material:brass, plating Tin

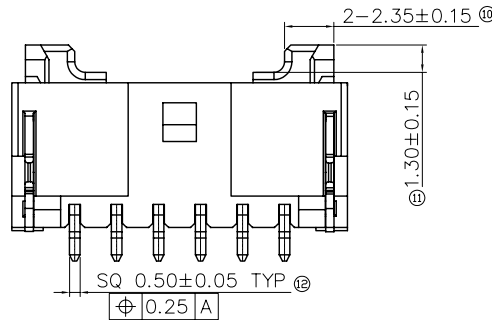

备注: 可与JST制“PAP-(*)V-S”配套使用

GENERAL TOLERANCE				UNITS mm		NAME(INTENDED USE)		ATOM®深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.									
SELECT	✓			MAT'L		WAFER 2.0 PITCH SMT											
TOL.						PART NO.(INTENDED USE)											
ON.	1	2	3	FINISH		WF200**-01***		TITLE: CUSTOMER DRAWING FOR WAFER2.0MM XP SMT 卧贴 带扣无定位柱 卷装									
X.XXX	±0.15	±0.05	±0.15			APPD:		DWG NO.: ATOM-A03662									
X.XX	±0.25	±0.13	±0.25	Q'TY		CHKD:		 <table><tr><th>SCALE</th><th>SHEET</th><th>REV.</th></tr><tr><td>1:1</td><td>1/1</td><td>A0</td></tr></table>				SCALE	SHEET	REV.	1:1	1/1	A0
SCALE	SHEET	REV.															
1:1	1/1	A0															
X.X	±0.30	±0.25	±0.50			DR:											
X.	±0.38	±0.38	±1.00			TOM											
ANGLE	±5°																