

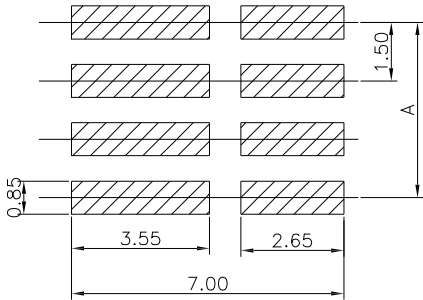




REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2015/05/12	/	NEW	Vicky

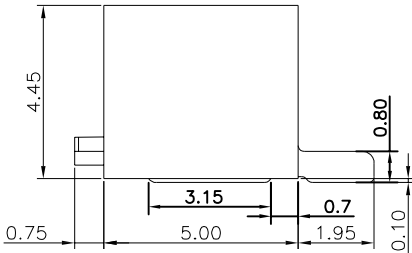


P.C.Board Layout

SPECIFICATIONS
Current rating:2.5A AC,DC
Voltage rating:350V AC,DC
Operating temperature:-25°C~85°C
Insulation resistance:1000MΩ MIN.
Withstanding voltage:500V AC/minute.
Contact resistance:20mΩ MAX.
Material:
Insulator:Nylon 6T UL 94V-0
Contact:Brass
Plating:TIn plated over Nickel

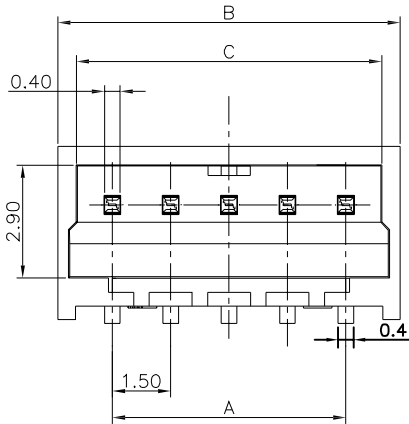

Pin	A	B	C
2P	1.50	4.30	3.35
3P	3.00	5.80	4.85
4P	4.50	7.30	6.35
5P	6.00	8.80	7.85
6P	7.50	10.30	9.35
7P	9.00	11.80	10.85
8P	10.50	13.30	12.35
9P	12.00	14.80	13.85
10P	13.50	16.30	15.35
11P	15.00	17.80	16.85
12P	16.50	19.30	18.35
13P	18.00	20.80	19.85
14P	19.50	22.30	21.35
15P	21.00	23.80	22.85

GENERAL TOLERANCE				UNITS mm	NAME: WF		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT ON.	TOL. ✓	1	2		3	PART NO: WF150**-01201	TITLE: Wafer1.5mm 12P SMT 卧贴 无焊片			
X.XXX	±0.10	±0.05	±0.15	FINISH	APPD: Vicky		DWG NO. ATOM-A03231			
X.XX	±0.20	±0.13	±0.25		CHKD: Doris			SCALE 1:1	SHEET 1/1	REV A
X.X	±0.30	±0.25	±0.50	Q'TY	DR: Cmy					
X.		±0.38	±1.00							
ANGLE	±1°									