


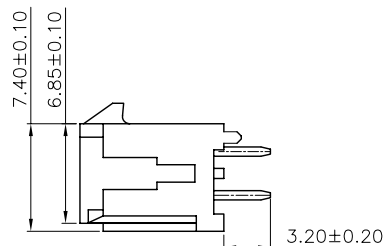




ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

5	6	7	8
REV	DATE	ECN NO.	MODIFICATION
A	2016/01/20		NEW

APPROVER
JASON

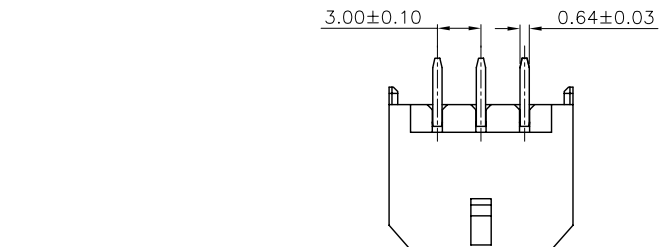

SPECIFICATION

1.Material:

Housing: Thermoplastic, UL 94V-0, COLOR:BLACK.
Pin MATERIAL : BRASS ALLOY
FINISH: TIN PLATED OVER NICKEL PLATED

2.Electrical Characteristics:


Voltage rating: 250V AC(RMS) or DC.
Current rating : 2.5A(max).
Operating Temperature: -25°C~+85°C.
Insulation resistance: 1000M ohms min. at 500VDC
Dielectric withstanding voltage: 1000 VAC/1minute.
Contact resistance: 20m ohms max.

3.Applicable Wire:AWG#30~#20


Pin	DIMENSION	
	A	B
02		6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

GENERAL TOLERANCE				UNITS mm	NAME: Wafer 3.0mm 2*XP		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓				MAT'L	PART NO: WF300**-09***	TITLE: Wafer 3.0mm 2*XP 180° 塑胶定位柱无K脚			
TOL.	1	2	3	FINISH			APPD:	Jason	DWG NO. ATOM-A02920	
X.XXX	±0.10	±0.05	±0.15		Q'TY	CHKD:	Vicky		SCALE	SHEET
X.XX	±0.15	±0.13	±0.25	DR:		Iris	1:1		1/2	A
X.X	±0.20	±0.25	±0.5							
X.	±0.30	±0.35	±1.00							
ANGLE	±2'									


ACAD GENERATED DRAWING. DON'T CHANGE BY HAND




18-CKT.




20-CKT.




22-CKT.




24-CKT.




10-CKT.




12-CKT.




14-CKT.




16-CKT.




2-CKT.



4-CKT.



6-CKT.



8-CKT.

2*1P--2*12P 结构对照图

GENERAL TOLERANCE				UNITS mm	NAME: Wafer 3.0mm 2*XP		ATOM[®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT ON.	✓				MAT'L	PART NO: WF300**—09***	TITLE: Wafer 3.0mm 2*XP 180° 塑胶定位柱无K脚			
X.XXX	±0.10	±0.05	±0.15	FINISH		APPD: Jason	DWG NO. ATOM—A0****			
X.XX	±0.15	±0.13	±0.25		Q'TY	CHKD: Vicky		SCALE	SHEET	REV
X.X	±0.20	±0.25	±0.5	DR: Iris				1:1	2/2	A
X.	±0.30	±0.35	±1.00							
ANGLE	±2'									