
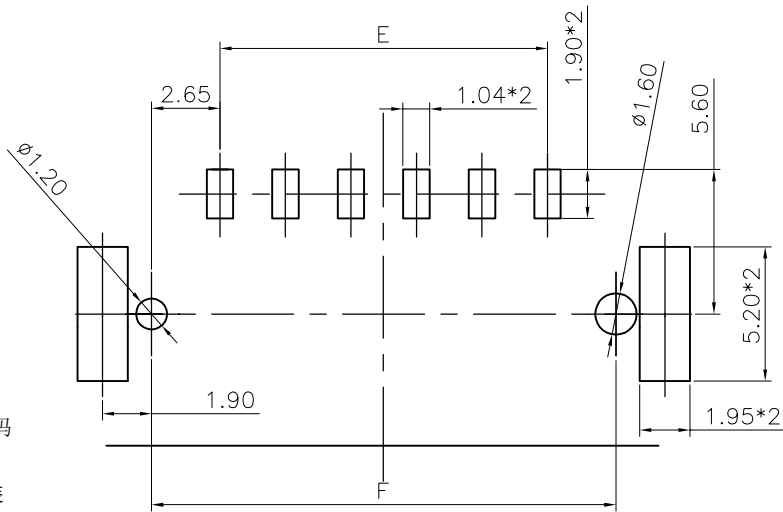


5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
AO	2023.08.22	/	NEW
			APPROVER
			Zfg

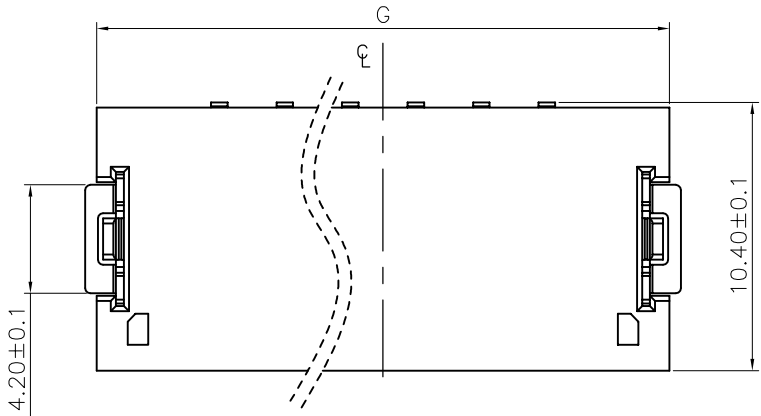

PART NO.
WF254**-682**

产品代码WF:Wafer简写

产品间距:2.54mm

产品Pin位: 02-06

00:流水码

1表示管装

2表示卷装

68:卧式带内扣

RECOMMEND P.C.B LAYOUT(TOP VIEW)
DEFAULT TOLERANCES:±0.05;PCB THICKNESS:1.6mm

NOTES:

1.MATERIAL:



Housing: High Temperature Materials
Natural UL94V-0
Terminal: Copper Alloy
H.D: Metal

2.Plating:

Terminal: Tin Plating With
Nickel Under Plating Overall
H.D: Tin Plating With
Nickel Under Plating Overall

3.Dielectric Withstanding Voltage: 1000V AC

4.Insulator Resistance: 500MΩ

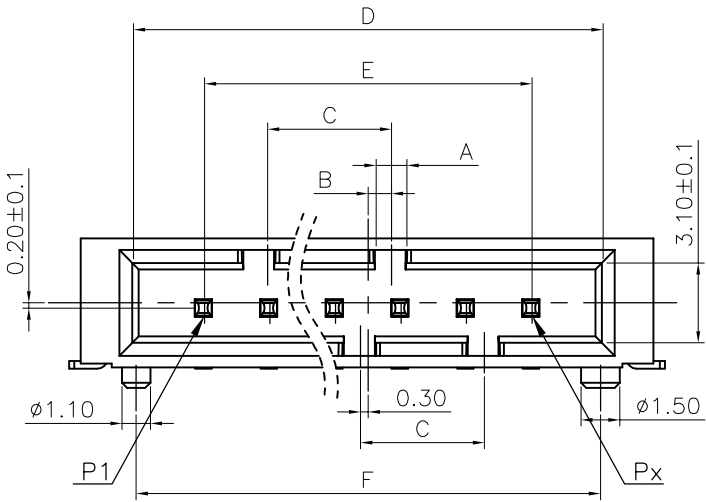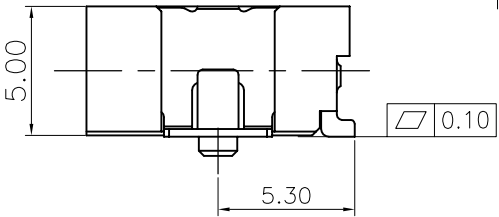

尺寸

极数	尺寸						
	A	B	C	D	E	F	G
2	0.6	0.60	2.40	8.04	2.54	7.84	12.04
3	0.6	0.60	2.40	10.58	5.08	10.38	14.58
4	1.20	0.90	4.80	13.12	7.62	12.92	17.12
5	1.20	0.90	4.80	15.66	10.16	15.46	19.66
6	1.20	0.90	4.80	18.20	12.70	18.00	22.20

GENERAL TOLERANCE				UNITS	NAME(INTENDED USE)	ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT			✓	mm					
TOL. ON.	1	2	3	MAT'L	PART NO.(INTENDED USE)	TITLE:			
	X.XXX	±0.10	±0.15	±0.20	WF254**-68200	PH 2.54mm *PIN SMT 卧式			
X.XX	±0.15	±0.20	±0.25	FINISH	APPD:	DWG NO.:			
X.X	±0.20	±0.25	±0.30		CHKD:	ATOM-A10978			
X.	±0.25	±0.30	±0.50	Q'TY	DR: Zfg		SCALE	SHEET	REV.
ANGLE	±2°						1:1	1/1	AO