



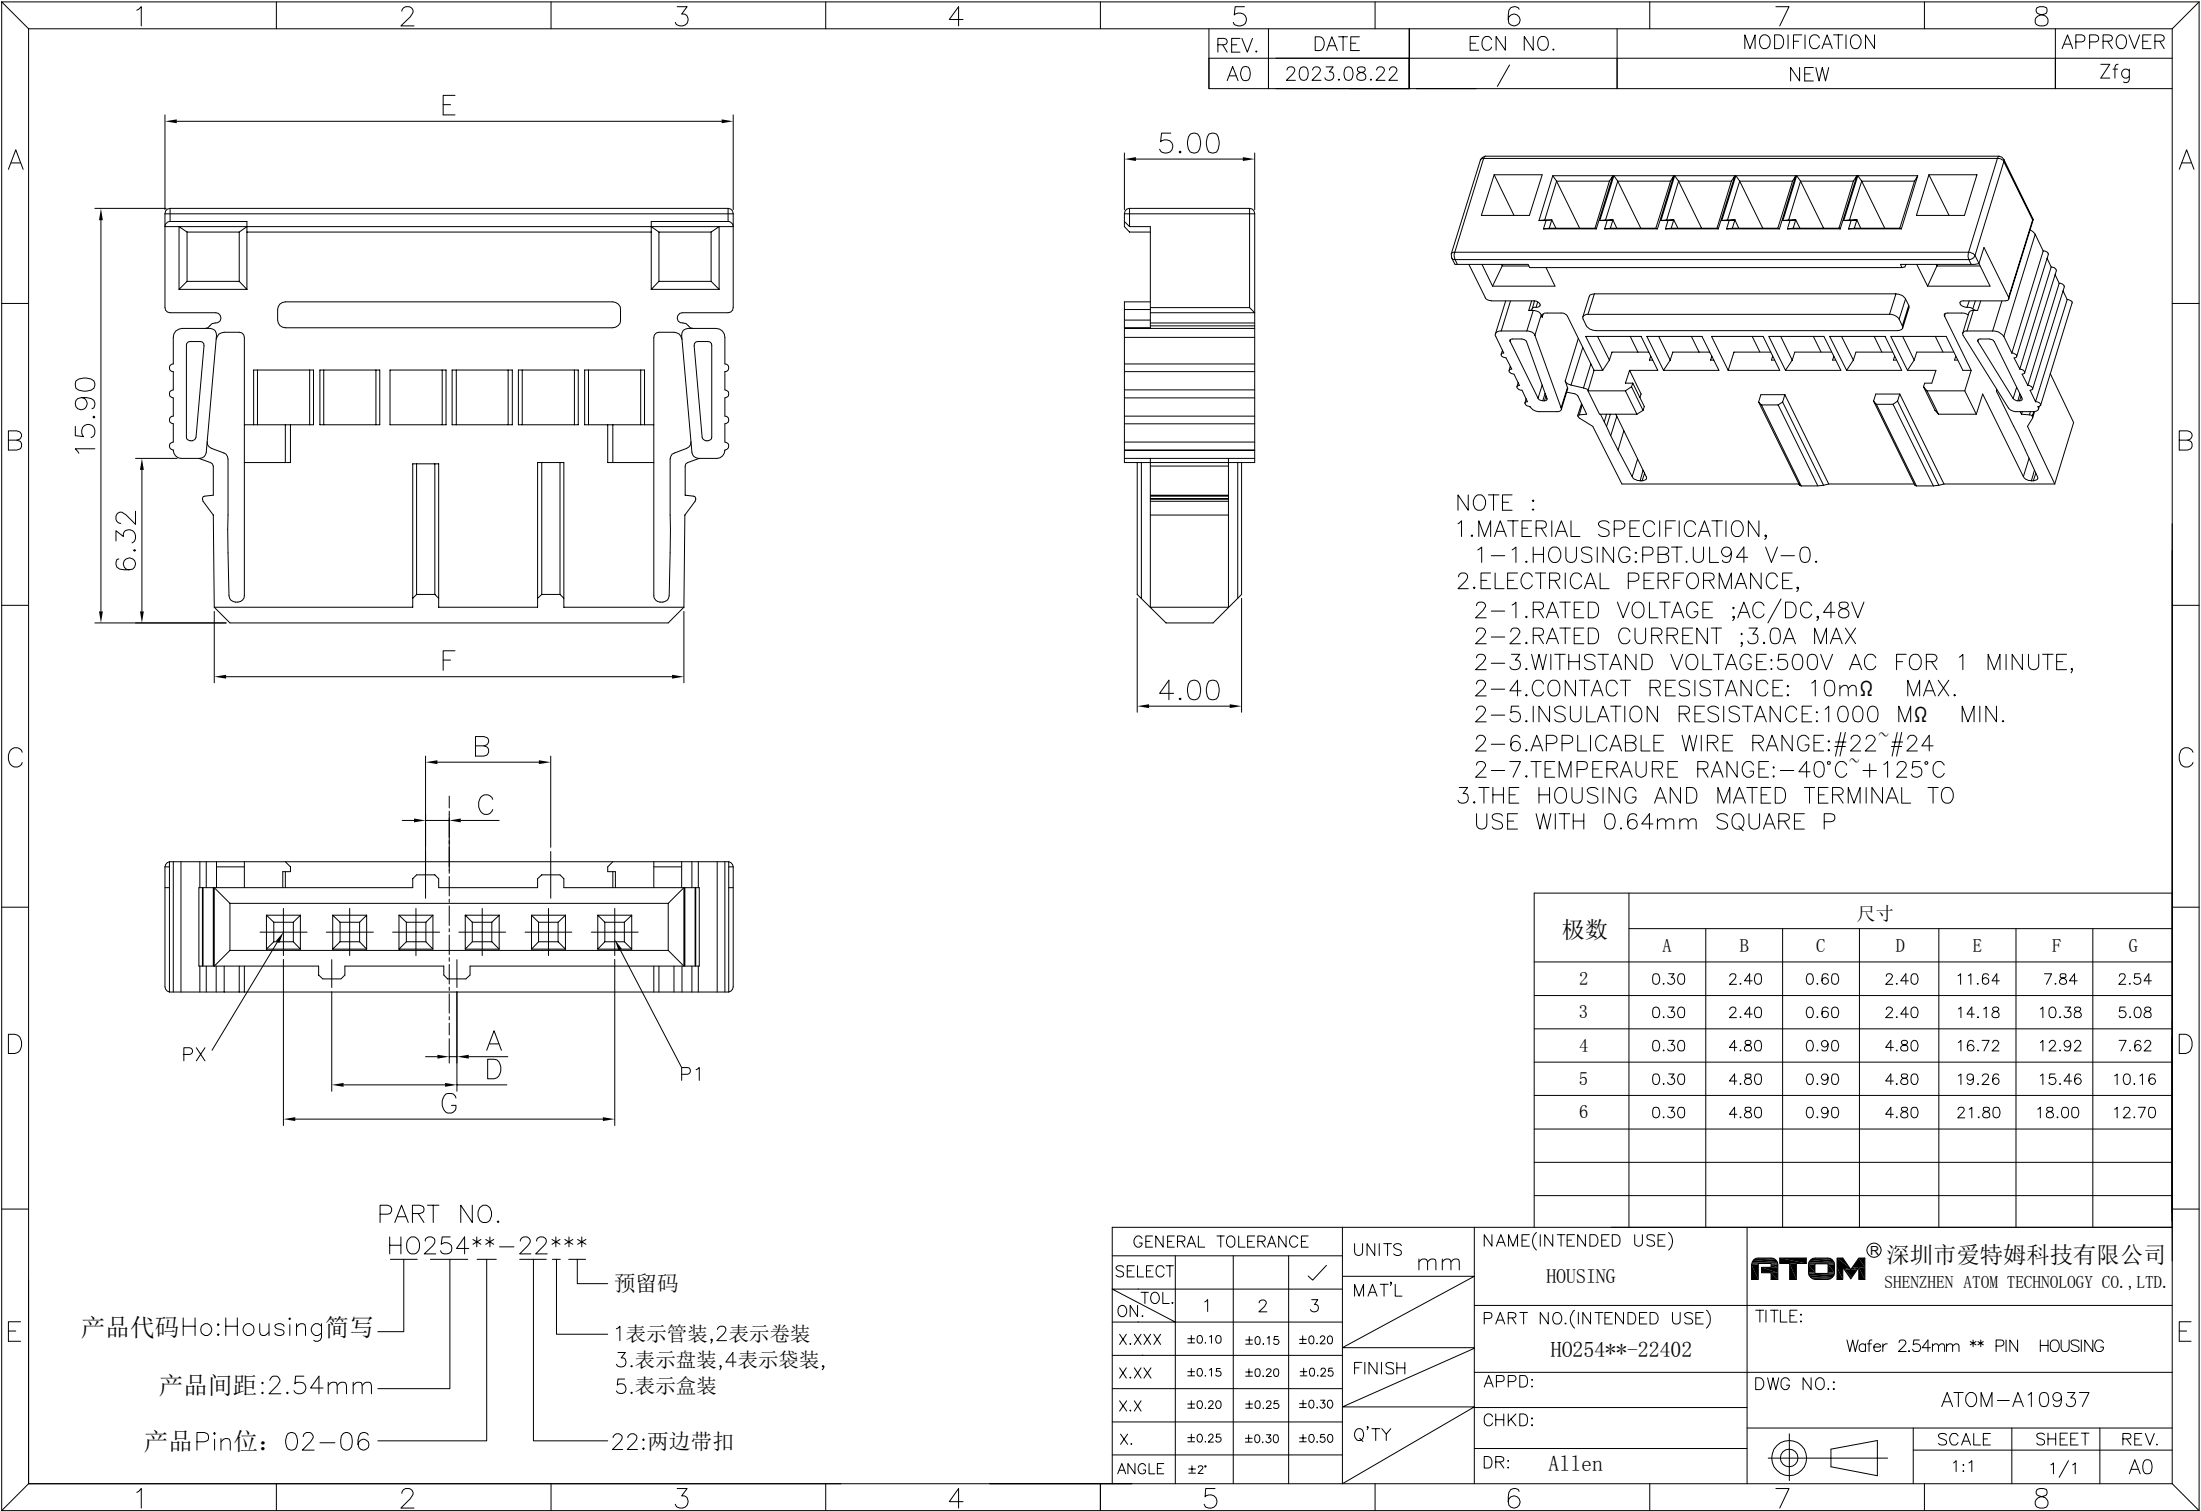


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
AO	2023.08.22	/	NEW	Zfg

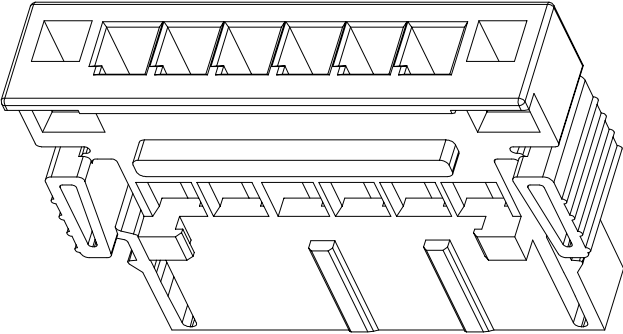

NOTE :
1.MATERIAL SPECIFICATION,
1-1.HOUSING:PBT.UL94 V-0.
2.ELECTRICAL PERFORMANCE,
2-1.RATED VOLTAGE ;AC/DC,48V
2-2.RATED CURRENT ;3.0A MAX
2-3.WITHSTAND VOLTAGE:500V AC FOR 1 MINUTE,
2-4.CONTACT RESISTANCE: 10mΩ MAX.
2-5.INSULATION RESISTANCE:1000 MΩ MIN.
2-6.APPLICABLE WIRE RANGE:#22~#24
2-7.TEMPERAURE RANGE:-40°C~+125°C
3.THE HOUSING AND MATED TERMINAL TO
USE WITH 0.64mm SQUARE P

极数	尺寸						
	A	B	C	D	E	F	G
2	0.30	2.40	0.60	2.40	11.64	7.84	2.54
3	0.30	2.40	0.60	2.40	14.18	10.38	5.08
4	0.30	4.80	0.90	4.80	16.72	12.92	7.62
5	0.30	4.80	0.90	4.80	19.26	15.46	10.16
6	0.30	4.80	0.90	4.80	21.80	18.00	12.70

GENERAL TOLERANCE				UNITS mm	NAME(INTENDED USE) HOUSING	ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT TOL. ON.	1	2	✓ 3						
X.XXX	±0.10	±0.15	±0.20	MAT'L	PART NO.(INTENDED USE) H0254**-22402	TITLE: Wafer 2.54mm ** PIN HOUSING			
X.XX	±0.15	±0.20	±0.25						
X.X	±0.20	±0.25	±0.30	FINISH	APPD:	DWG NO.: ATOM-A10937			
X.	±0.25	±0.30	±0.50						
ANGLE	±2°			Q'TY	CHKD:				
					DR: Allen	SCALE 1:1			
						SHEET 1/1			
						REV. AO			

PART NO.
H0254**-22***
预留码
产品代码Ho:Housing简写
产品间距:2.54mm
产品Pin位: 02-06
22:两边带扣
1表示管装,2表示卷装
3.表示盘装,4表示袋装,
5.表示盒装