

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2010/02/03	/	NEW	Vicky

SPECIFICATIONS

Voltage rating: AC,DC,50V

Current rating: 1.0A,AC,DC(AWG#28)

Withstand voltage: 500V AC/minute




Working Temperature: -25℃~+85℃

Insulation resistance: ≥100MΩ

Contact resistance: ≤20mΩ


Wafer Material: Nylon9T UL94V-0

Contact Material: Phosphor Bronze

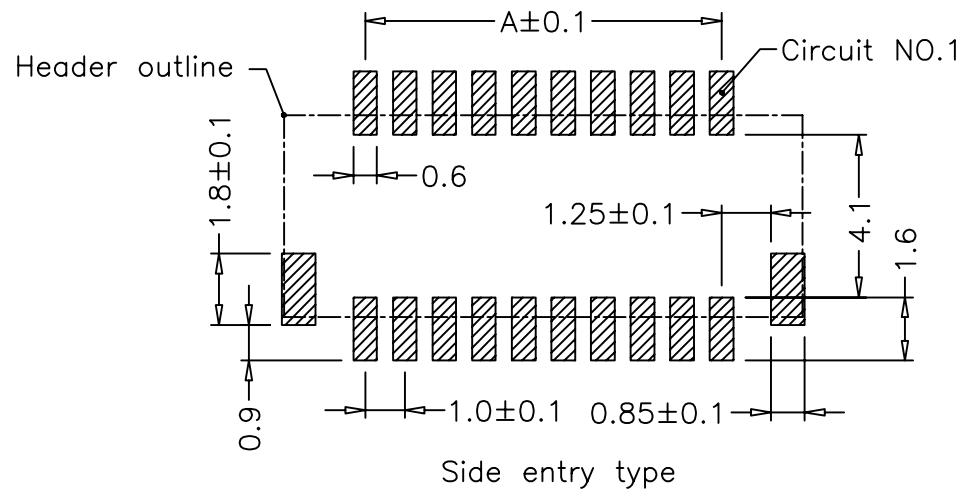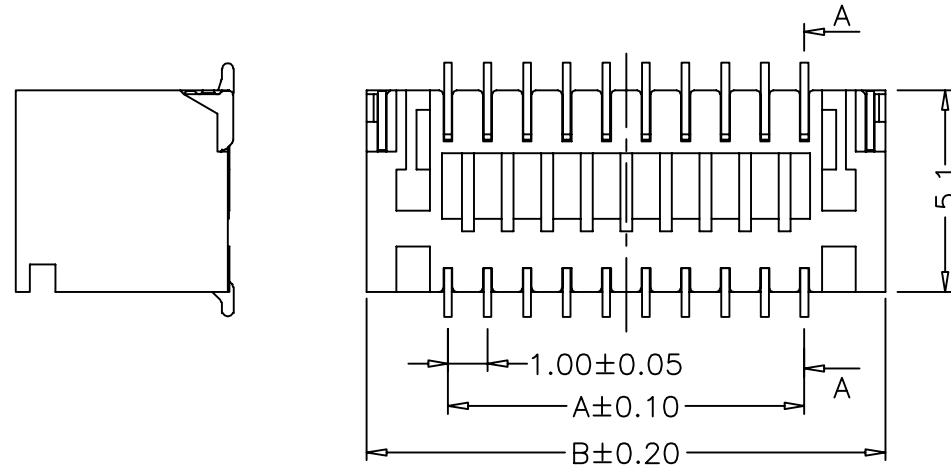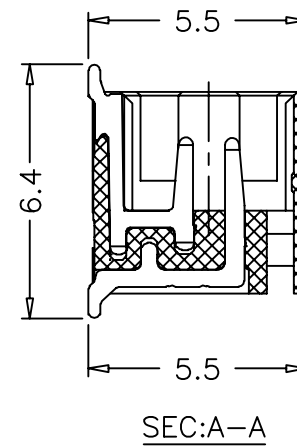

PIN NO.	A	B
10	9.00	13.1
15	14.00	18.1
20	19.00	23.1
25	24.00	28.1

GENERAL TOLERANCE				UNITS	NAME:	ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	TOL.	1	2	3	mm	WF			
ON.					MAT'L	PART NO:	TITLE: Wafer1.0mm 2*XP SMT 贴片 侧插 H=5.5mm		
X.XXX			±0.05	±0.15		WF100**-04***			
X.XX	±0.15	±0.13	±0.25		FINISH	APPD:	DWG NO. ATOM-A00736		
X.X	±0.25	±0.25	±0.50			CHKD:			
X.	±0.30	±0.38	±1.00		Q'TY	Vicky			
ANGLE	±2°					DR:			
						Iris			



SCALE	SHEET	REV
1:1	1/1	A