

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2019/03/19	/	NEW	Jason

SPECIFICATIONS:


- 1.Current Rating: 1Amp
- 2.Rated Voltage: 125V AC DC rms
- 3.Contact resistance: 20mΩ Max
- 4.Insulation Resistance: 100MΩ Min
- 5.Withstanding Voltage : AC 500V/Min
- 6.Operating Temperature : -25°C~+85°C

Electrical Characteristics:

- 1.Contact Material: Copper Alloy
- 2.Insulator Material: Thermoplastic,UL94-V0
- 3.Plating: Matte Tin plated over Nickel

Lead free and ROHS compliant product

PIN NO.	A	B
20P	21.55	20.50
19P	20.55	19.50
18P	19.55	18.50
17P	18.55	17.50
16P	17.55	16.50
15P	16.55	15.50
14P	15.55	14.50
13P	14.55	13.50
12P	13.55	12.50
11P	12.55	11.50
10P	11.55	10.50
9P	10.55	9.50
8P	9.55	8.50
7P	8.55	7.50
6P	7.55	6.50
5P	6.55	5.50
4P	5.55	4.50
3P	4.55	3.50
2P	3.55	2.50

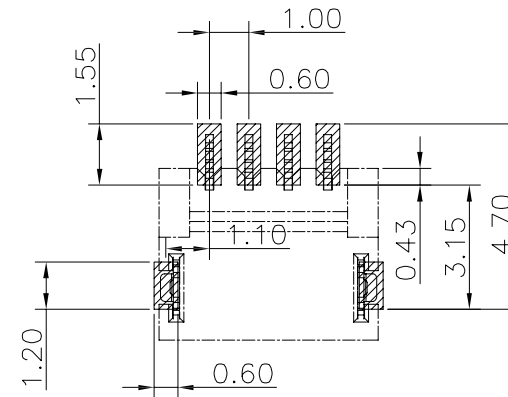

P.C.B LAYOUT

REFERENCE TOLERANCE:±0.05

GENERAL TOLERANCE					UNITS	mm	NAME:	ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓				MAT'L		WF	TITLE: Customer Drawing For WaferWafer1.0mm XP SMT 卧式 超薄带扣			
ON.	TOL.	1	2	3							
X.XXX	±0.10	±0.05	±0.15		FINISH		WF10***-22***	DWG NO. ATOM-A04327			
X.XX	±0.15	±0.13	±0.25				APPD: Jason				
X.X	±0.20	±0.25	±0.50		Q'TY		CHKD: tom	SCALE SHEET REV			
X.	±0.30	±0.38	±1.00				DR: piao				
ANGLE	±2°							1:1 1/1 A			

