REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2016/06/29	/	NEW	Vicky

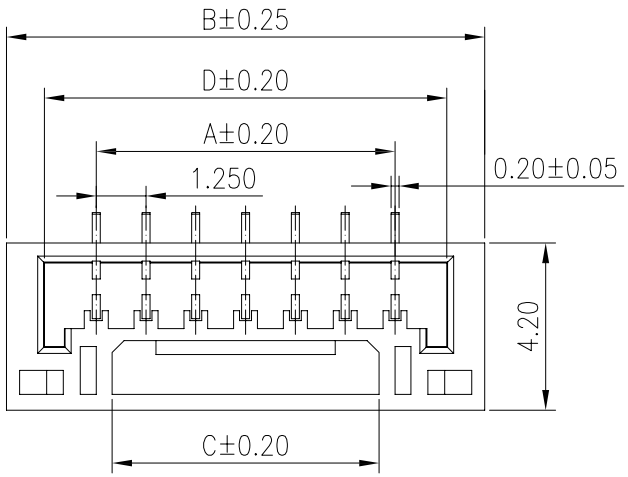



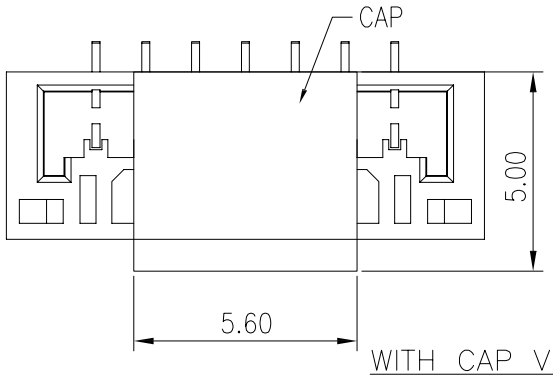

WITH CAP VIEW



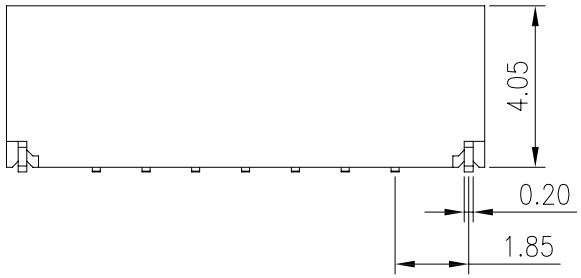

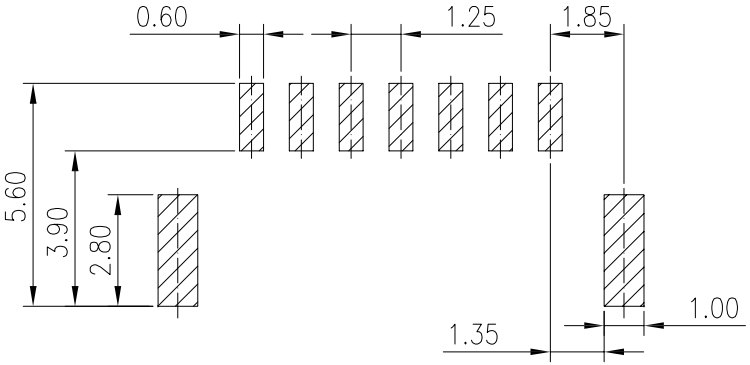

Recommended P.C.Board Layout

PIN NO:	A	B	C	D
02	1.25	5.75	2.20	3.75
03	2.50	7.00	3.30	5.00
04	3.75	8.25	4.55	6.25
05	5.00	9.50	4.55	7.50
06	6.25	10.75	6.55	8.75
07	7.50	12.00	6.55	10.00
08	8.75	13.25	6.55	11.25
09	10.00	14.50	6.55	12.50
10	11.25	15.75	8.55	13.75
11	12.50	17.00	8.55	15.00
12	13.75	18.25	8.55	16.25

SPECIFICATIONS
Current rating: 1A AC, DC
Voltage rating:50V AC,DC
Temperature range: -25°C ~ +85°C
Insulation resistance: 100MΩ/ min.
Withstanding voltage: 500V AC/ minute.
Contact resistance: 30mΩ/ max.
Material:
Insulator: PA6T UL94V-0
Contact: copper alloy
Finish: Tin plated

GENERAL TOLERANCE			
SELECT	✓		
TOL. ON:	1	2	3
X.XXX	±0.10	±0.05	±0.15
X.XX	±0.20	±0.13	±0.25
X.X	±0.30	±0.25	±0.50
X.		±0.38	±1.00
ANGLE	±2°		

UNITS mm
MAT'L
FINISH
Q'TY

NAME: Wafer
PART NO: WF125**–02***
APPD: Vicky
CHKD: Doris
DR: Jillian

ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.
TITLE: Wafer1.25mm XP 立式 带扣
DWG NO. ATOM–A03247

SCALE	SHEET	REV
1:1	1/1	A