

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2007/01/23	/	NEW	Vicky

SPECIFICATIONS

Poles: 2~16

Applicable wire: AWG#32~#28

Voltage rating: AC,DC,125V

Current rating: 1.0A,AC,DC

Withstand voltage: 500V AC/minute

Working Temperature: -25℃~+85℃

Insulation resistance: ≥1000 ohM

Contact resistance: ≤0.02 oh


MATERIAL

Terminal: Copper Alloy

Housing: Thermoplastic, UL94V-0

Plating: Tin Plated

PIN NO.	A	B	C
2	4.25	3.05	1.25
3	5.50	4.30	2.50
4	6.75	5.55	3.75
5	8.00	6.80	5.00
6	9.25	8.05	6.25
7	10.50	9.30	7.50
8	11.75	10.55	8.75
9	13.00	11.80	10.00
10	14.25	13.05	11.25
11	15.50	14.30	12.50
12	16.75	15.55	13.75
13	18.00	16.80	15.00
14	19.25	18.05	16.25
15	20.50	19.30	17.50
16	21.75	20.55	18.75

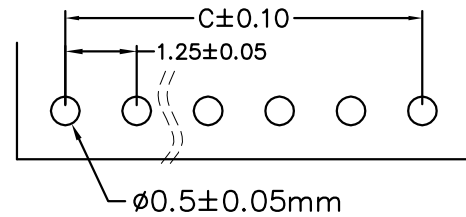

P.C.B LAYOUT

GENERAL TOLERANCE				UNITS	mm	NAME:	ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	✓					WF				
TOL.	1	2	3			PART NO:	TITLE: Wafer1.25mm XP DIP 180° W=3.45 米色			
ON.						WF125**-07***				
X.XXX		±0.05	±0.15			FINISH	DWG NO. ATOM-A00753			
X.XX	±0.08	±0.13	±0.25			Q'TY				
X.X	±0.15	±0.25	±0.50			APPD:	MIKE			
X.	±0.20	±0.38	±1.00			CHKD:	Vicky			
ANGLE	±2°					DR:	Iris			



SCALE	SHEET	REV
1:1	1/1	A