
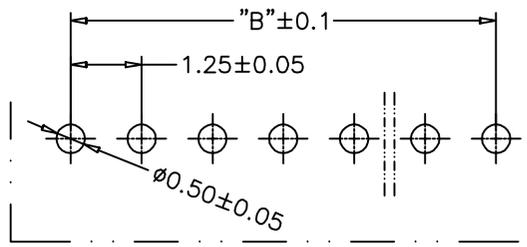


PIN NO.	A	B
2	4.25	1.25
3	5.50	2.50
4	6.75	3.75
5	8.00	5.00
6	9.25	6.25
7	10.50	7.50
8	11.75	8.75
9	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50
16	21.75	18.75

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2009/08/12	/	NEW	Vicky
B	2012/08/07	RD00312080701	根据实物修改图面	Vicky

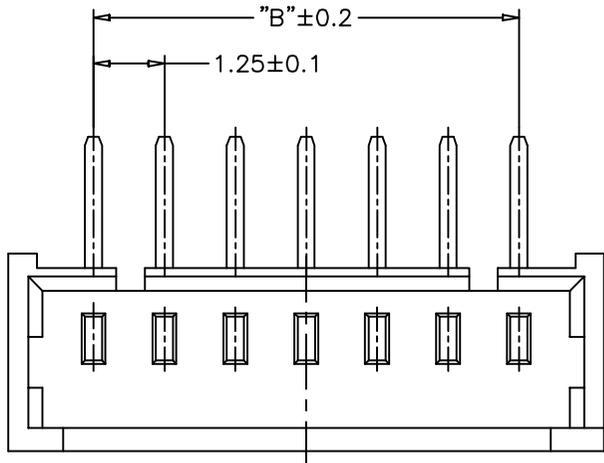



P.C.B LAYOUT

SPECIFICATIONS

- Applicable wire: AWG#28~#32
- Rated voltage: 125V DC/AC(rms)
- Rated current: 1.0A(AWG #28)
- Withstand voltage: 250V AC/minute
- ⓑ Working Temperature: -40°C~+85°C
- Insulation resistance: ≥ 100 ohM
- Contact resistance: ≤ 0.02 oh

MATERIAL

- Terminal: Copper Alloy
- Housing: Thermoplastic, UL94V-0

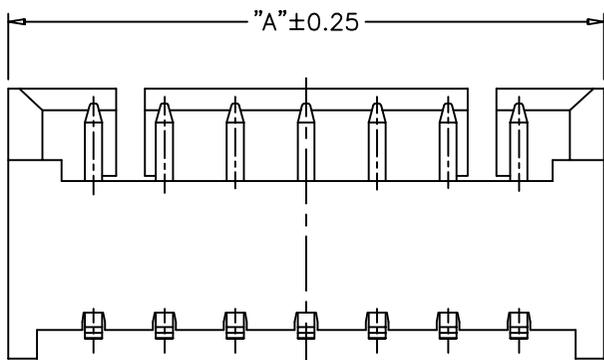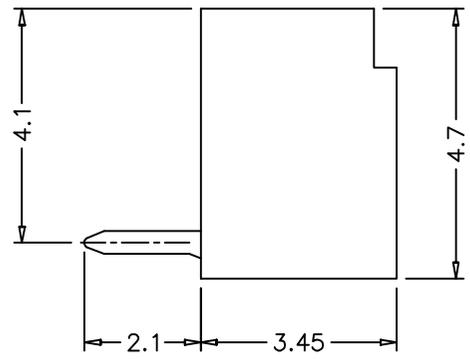

GENERAL TOLERANCE				UNITS	NAME:	ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.		
SELECT	✓			mm	WF	TITLE: Wafer1.25mm XP DIP 90° H=3.45 米色		
TOL.	1	2	3	MAT'L	PART NO:	WF125**-06***		
X.XXX		±0.05	±0.15	FINISH	APPD:	Vicky		
X.XX	±0.15	±0.13	±0.25	Q'TY	CHKD:	Emilia		
X.X	±0.25	±0.25	±0.50		DR:	Iris		
X.	±0.30	±0.38	±1.00			SCALE SHEET REV		
ANGLE	±2'					1:1 1/1 B		