REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2015/11/23	/	NEW	Vicky





SPECIFICATIONS
Current rating:2.5A AC,DC
Voltage rating:350V AC,DC
Operating temperature:−25°C~85°C
Insulation resistance:1000MΩ MIN.
Withstanding voltage:500V AC/minute.
Contact resistance:20mΩ MAX.
Material:
Insulator:Nylon 6T UL 94V−0
Contact:Brass
Plating:Tin plated over Nickel
Suitable:KR1500 series Housing

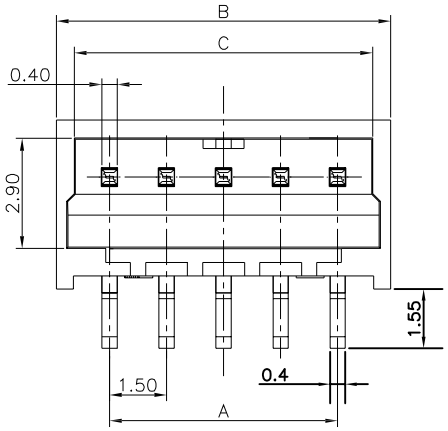

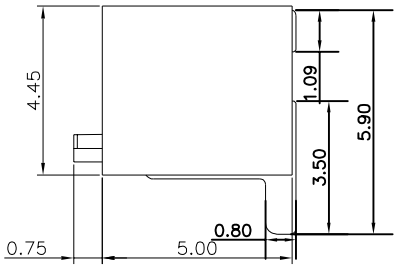

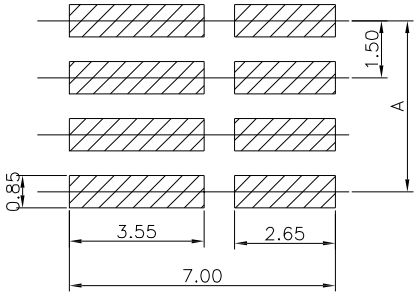

P.C.Board Layout

Pin	A	B	C
2P	1.50	4.30	3.35
3P	3.00	5.80	4.85
4P	4.50	7.30	6.35
5P	6.00	8.80	7.85
6P	7.50	10.30	9.35
7P	9.00	11.80	10.85
8P	10.50	13.30	12.35
9P	12.00	14.80	13.85
10P	13.50	16.30	15.35
11P	15.00	17.80	16.85
12P	16.50	19.30	18.35
13P	18.00	20.80	19.85
14P	19.50	22.30	21.35
15P	21.00	23.80	22.85





装盖子示意图

GENERAL TOLERANCE			
SELECT ON: TOL.	✓ 1	2	3
X.XXX	±0.10	±0.05	±0.15
X.XX	±0.20	±0.13	±0.25
X.X	±0.30	±0.25	±0.50
X.		±0.38	±1.00
ANGLE	±2°		

UNITS mm
MAT'L
FINISH
Q'TY

NAME: WF
PART NO: WF15012−02202
APPD: Vicky
CHKD: Doris
DR: Jillian

ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.

TITLE: Wafer1.5mm 12P SMT 立贴 无焊片

DWG NO. ATOM−A03239

SCALE	SHEET	REV
1:1	1/1	A