
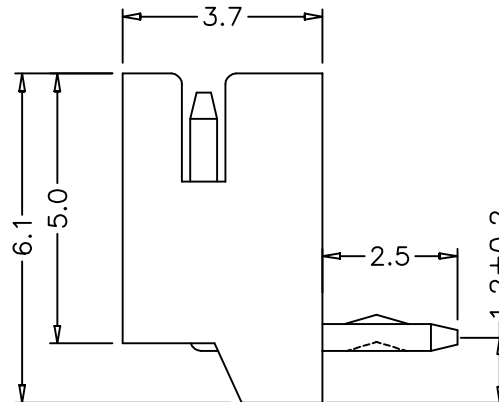
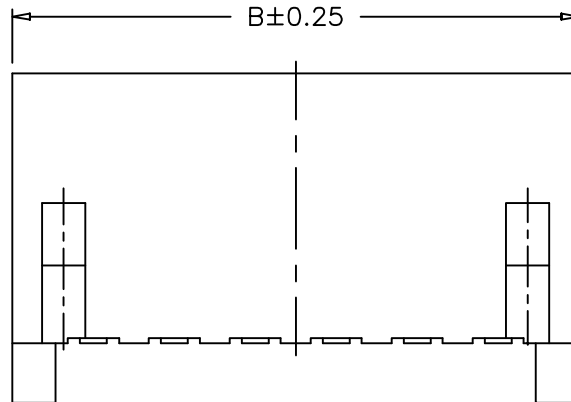
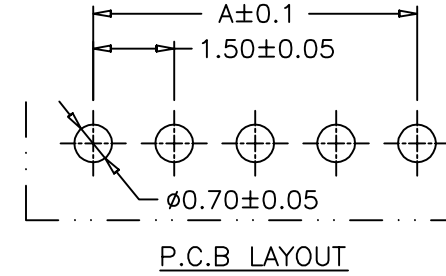
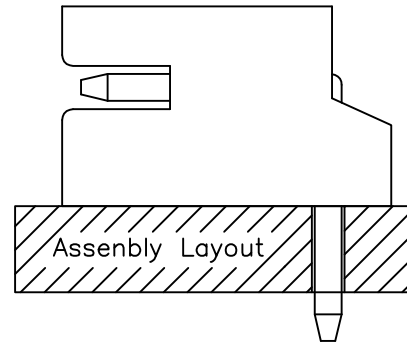


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2011/09/06	/	NEW	Vicky

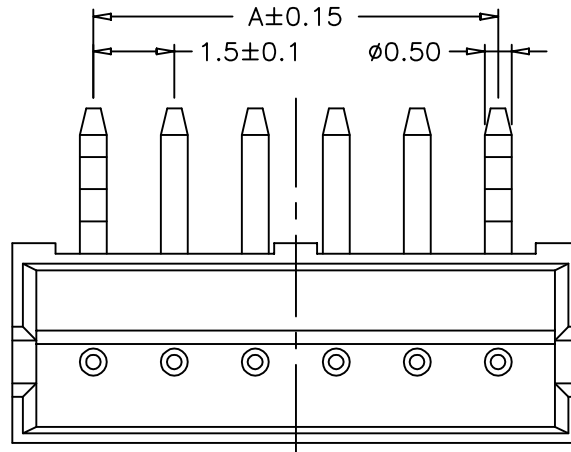

SPECIFICATIONS


Applicable wire: AWG#26~#32
Rated voltage: 50V DC/AC(rms)
Rated current: 1A (AWG #26)
Withstand voltage: 500V AC/min.
Working Temp: -25°C~+85°C
Insulation resistance: $\geq 500M\Omega$
Contact resistance: $\leq 20m\Omega$

MATERIAL

Wafer: Nylon46, UL94-V0
Pin: Brass

PIN NO.	A	B
2P	1.5	4.5
3P	3.0	6.0
4P	4.5	7.5
5P	6.0	9.0
6P	7.5	10.5
7P	9.0	12.0
8P	10.5	13.5
9P	12.0	15.0
10P	13.5	16.5
11P	15.0	18.0
12P	16.5	19.5
13P	18.0	21.0
14P	19.5	22.5
15P	21.0	24.0
16P	22.5	25.5

GENERAL TOLERANCE				UNITS	NAME:	ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	TOL.	1	2	3	MAT'L	PART NO:	TITLE: Wafer1.5mm XP DIP 90° 米黄色 H=6.1 打K脚		
X.XXX		±0.05	±0.15		FINISH	APPD:	Vicky		
X.XX	±0.15	±0.13	±0.25		Q'TY	CHKD:	Emilia		
X.X	±0.25	±0.25	±0.50			DR:	Iris		
X.	±0.30	±0.38	±1.00						
ANGLE	±2°								



SCALE	SHEET	REV
1:1	1/1	A