


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2007/01/23	/	NEW	Vicky

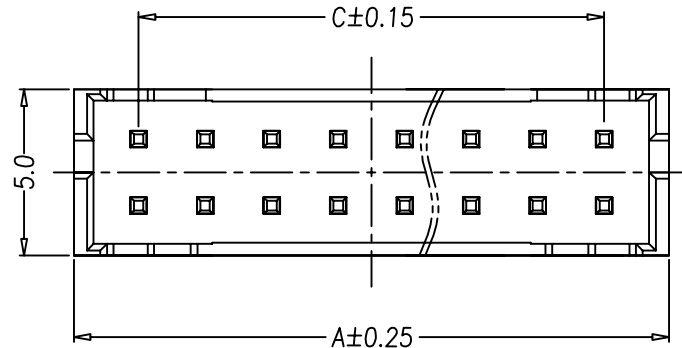

SPECIFICATIONS:

PH: 2.0

Applicable wire: AWG#24~#28

Voltage rating: 250V AC/DC(rms)

Current rating: 2.0A

Withstand voltage: 800V AC(rms)

Working Temperature: -25°C~+85°C

Insulation resistance: ≥1000MΩ




Contact resistance: ≤0.02 Ω

Applicable PC board thickness: 0.8mm~1.6mm

MATERIAL


Terminal: Brass/Tin-Plated

Housing: Nylon46 UL94V-0

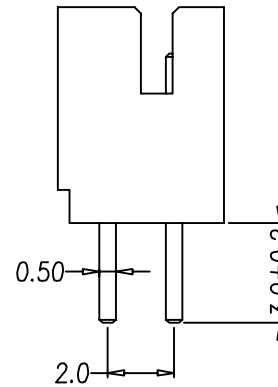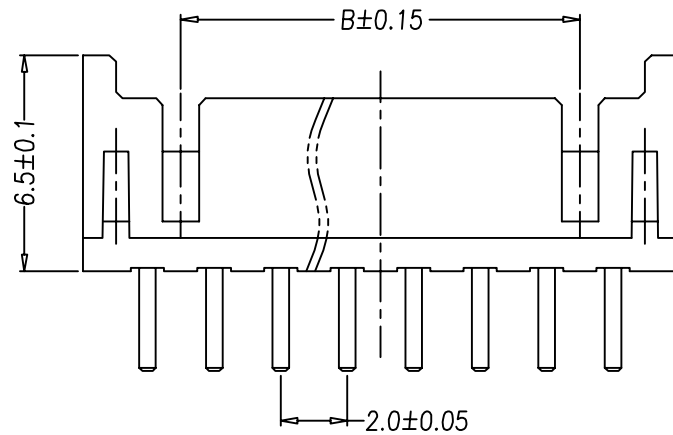

P.C.B Layout

PIN NO.	A	B	C
2*2	5.90	0.00	2.00
2*3	7.90	2.00	4.00
2*4	9.90	4.00	6.00
2*5	11.90	6.00	8.00
2*6	13.90	8.00	10.00
2*7	15.90	10.00	12.00
2*8	17.90	12.00	14.00
2*9	19.90	14.00	16.00
2*10	21.90	16.00	18.00
2*11	23.90	18.00	20.00
2*12	25.90	20.00	22.00
2*13	27.90	22.00	24.00
2*14	29.90	24.00	26.00
2*15	31.90	26.00	28.00
2*16	33.90	28.00	30.00
2*17	35.90	30.00	32.00
2*18	37.90	32.00	34.00
2*19	39.90	34.00	36.00
2*20	41.90	36.00	38.00

GENERAL TOLERANCE					UNITS mm		NAME: WF		ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.				
SELECT	✓				MAT'L	PART NO:		TITLE: Wafer2.0mm 2*XP DIP 180°					
TOL. ON:	1	2	3			WF200**--09***							
X.XXX		±0.05	±0.15		FINISH	APPD:		DWG NO. ATOM-A00767					
X.XX	±0.08	±0.13	±0.25			Vicky							
X.X	±0.15	±0.25	±0.50		Q'TY	CHKD:							
X.	±0.20	±0.38	±1.00			Amy							
ANGLE	±2°					DR:							
						Iris		SCALE SHEET REV 1:1 1/1 A					