
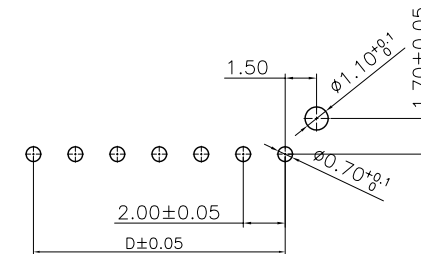
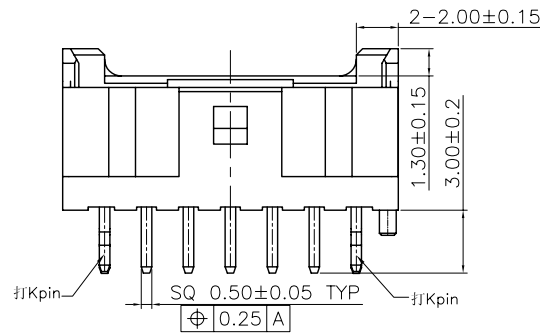
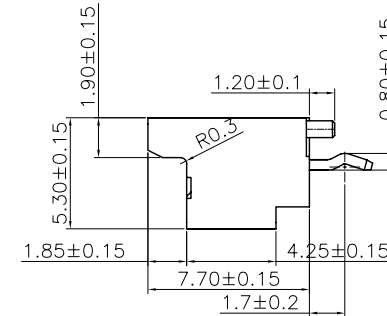
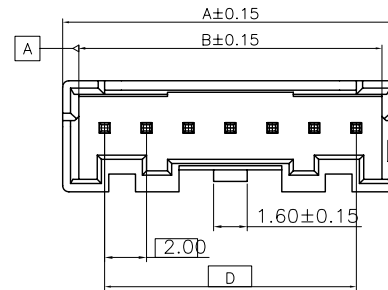
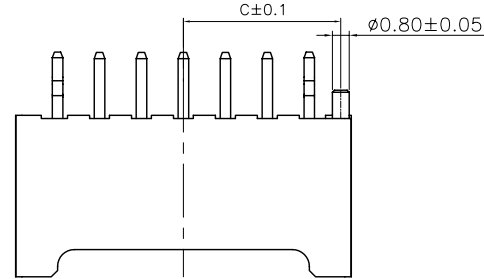


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2017.04.15	/	新增零件	JASON
		/		










PCB LAYOUT

- 规格:
Specifications:
- 额定电流: 3A AC/DC (使用AWG#22时)
Current rating:3A AC/DC (AWG#22)
 - 额定电压: 250V AC/DC
Voltage rating:250V AV/DC
 - 使用温度范围: -25℃~+85℃ (含通电时温度上升)
Temperature range:-25℃~+85℃
(including temperature rise in applying electrical current)
 - 接触电阻: 初期 / 10 mΩ 以下
环境试验后/ 20 mΩ 以下
Contact resistance:Initial value/10mΩ max
After environmental tests/20 mΩ max
 - 绝缘电阻: 初期/1000MΩ 以上
Insulation resistance:1000 MΩ min
 - 耐电压: AC 800V/1分钟
Withstanding voltage:800VAC/minute
 - 适用电线范围: AWG#28~#22
Applicable wire:AWG#28 to #22
 - 适合的印刷电路板厚度: 1.6mm
Applicable PC board thickness:1.6mm
 - 主体材料: Thermoplastic,UL94-V0, 天然色(白色)
Housing material:Thermoplastic,UL94-V0,natural (White)
 - 端子材料: 黄铜, 镀锡
Terminal material:brass,plating Tin

GENERAL TOLERANCE				UNITS	NAME(INTENDED USE)		ATOM®深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.				
SELECT	✓			mm	MAT'L	WAFER 2.0 DIP 180° H7.7		TITLE: Wafer2.0mm XP DIP 180° 两边端子 打K角 带定位柱			
TOL ON.	1	2	3			PART NO.(INTENDED USE)					
X.XXX	±0.15	±0.05	±0.15	FINISH		WF200**-11***		DWG NO.: ATOM-A03429			
X.XX	±0.25	±0.13	±0.25 <th colspan="2">APPD: JASON</th>			APPD: JASON					
X.X	±0.30	±0.25	±0.50	Q'TY		CHKD: VICKY		 SCALE SHEET REV.			
X.	±0.38	±0.38	±1.00 <th colspan="2">DR: DAVID</th>			DR: DAVID					
ANGLE	±5°							1:1 1/2 AO			

ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2017.04.15	/	新增规格	JASON

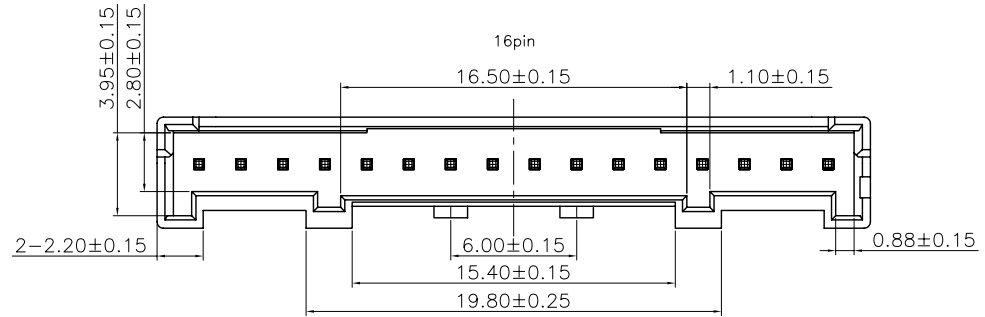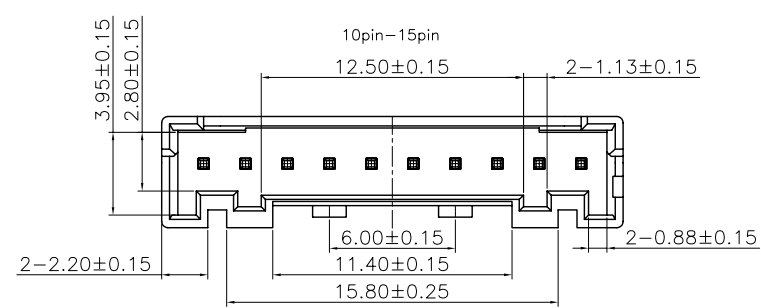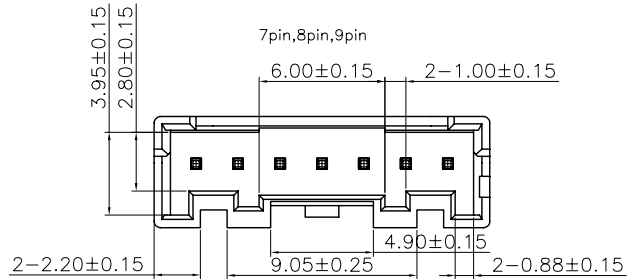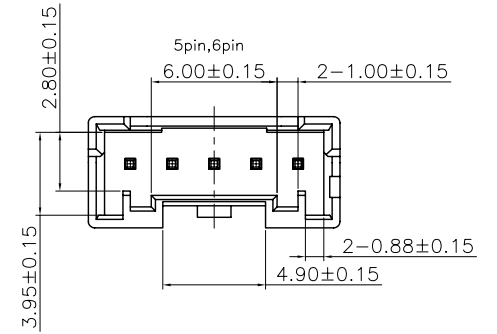

极数	尺寸				备注
	A	B	C	D	
2	6.00	4.45	2.50	2.00	
3	8.00	6.45	3.50	4.00	
4	10.00	8.45	4.50	6.00	
5	12.00	10.45	5.50	8.00	
6	14.00	12.45	6.50	10.00	
7	16.00	14.45	7.50	12.00	
8	18.00	16.45	8.50	14.00	
9	20.00	18.45	9.50	16.00	
10	22.00	20.45	10.50	18.00	
11	24.00	22.45	11.50	20.00	
12	26.00	24.45	12.50	22.00	
13	28.00	26.45	13.50	24.00	
14	30.00	28.45	14.50	26.00	
15	32.00	30.45	15.50	28.00	
16	34.00	32.45	16.50	30.00	

GENERAL TOLERANCE				X.± 0.20	X°.± 5°	UNITS	mm	NAME(INTENDED USE)		ATOM®深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓			.X± 0.15	.X°.± 2°	MAT'L		WAFER 2.0 DIP 180° H7.7					
TOL.	1	2	3	.XX± 0.08	.XX°.± 1°			FINISH		PART NO.(INTENDED USE)		TITLE:	
ON.				.XXX± 0.05	.XXX°.± 0.5°	Q'TY				WF200**-11***		Wafer2.0mm XP DIP 180° 两边端子 打K角 带定位柱	
X.XXX	±0.15	±0.05	±0.15	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ATOM TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ATOM TECHNOLOGY CO.,LTD.				APPD:		DWG NO.:			
X.XX	±0.25	±0.13	±0.25					ATOM-A03429					
X.X	±0.30	±0.25	±0.50					CHKD:					
X.	±0.38	±0.38	±1.00					DR:					
ANGLE	±5°					DAVID				SCALE	SHEET	REV.	
										1:1	2/2	A0	