REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2007/06/05	/	NEW	Vicky

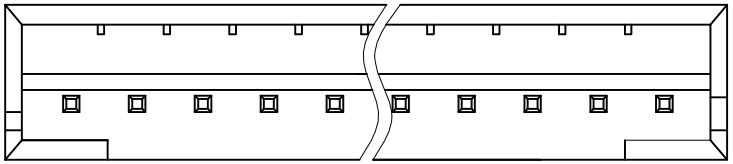

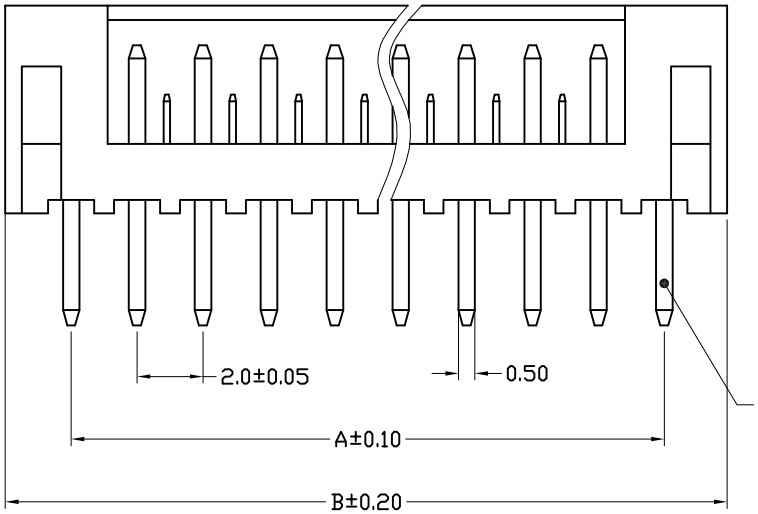

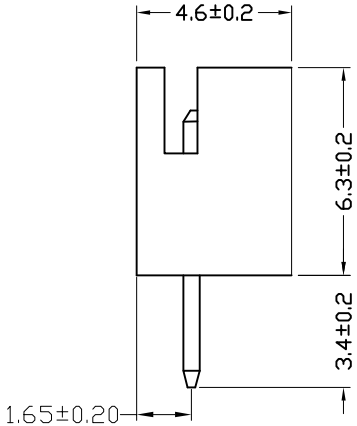

SPECIFICATIONS
Pitch: 2.0
Poles: 2~16
Voltage rating: AC,DC,250V (rms)
Current rating: 2.0A,AC,DC
Withstand voltage: 800V AC/minute
Working Temperature: −25°C~+85°C
Insulation resistance: ⩾ 1000 MΩ
Contact resistance: ≤ 0.02 Ω
Applicable PC board thickness: 0.8mm~1.6mm

MATERIAL
Terminal: Copper Alloy
Housing: Thermoplastic, UL94−0

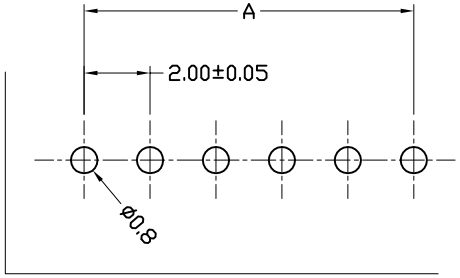

P.C.B LAYOUT

PIN NO.	A	B
2	2.0	6.0
3	4.0	8.0
4	6.0	10.0
5	8.0	12.0
6	10.0	14.0
7	12.0	16.0
8	14.0	18.0
9	16.0	20.0
10	18.0	22.0
11	20.0	24.0
12	22.0	26.0
13	24.0	28.0
14	26.0	30.0
15	28.0	32.0
16	30.0	34.0

GENERAL TOLERANCE			
SELECT ON: TOL.	1	2	3
X.XXX		±0.05	±0.15
X.XX	±0.10	±0.13	±0.25
X.X	±0.15	±0.25	±0.50
X.	±0.25	±0.38	±1.00
ANGLE	±2°		

UNITS mm
MAT'L
FINISH
Q'TY

NAME: WF
PART NO: WF200**−07***
APPD: MIKE
CHKD: Vicky
DR: Iris

ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.

TITLE: Wafer2.0mm XP DIP 180°
DWG NO. ATOM−A00766

SCALE	SHEET	REV
1:1	1/1	A