

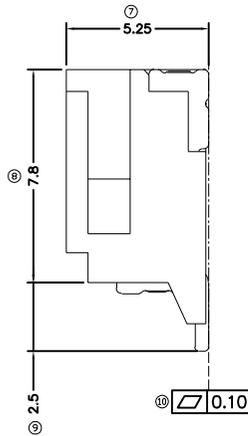
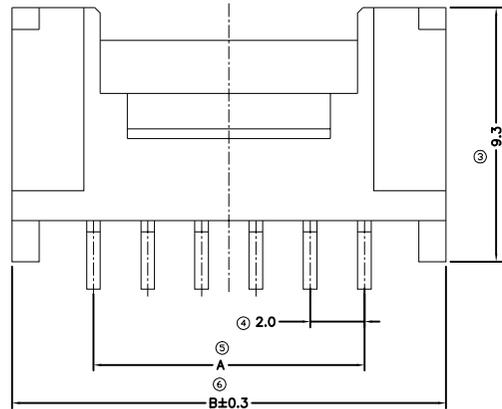
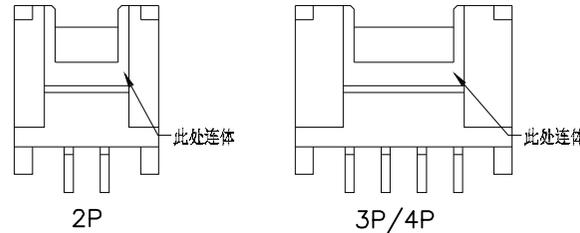
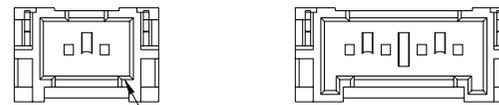


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A0	2017.12.21	/	NEW	Jason
A1	2021.01.19	RD00321011901	产品结构优化	Jason

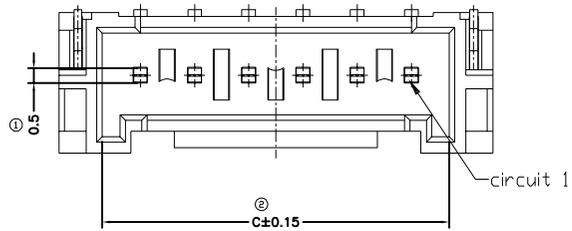

**SPECIFICATIONS:**  
 1.Current Rating: 2 Amp  
 2.Voltage Rating: 125V  
 3.Contact Resistance:20mΩ  
 4.Insulation Resistance: 1000MΩ min  
 5.Dielectric Withstanding : AC 800V  
 6.Operating Temperature : -25°C~+85°C  
**Material:**  
 1.Contact Material: Copper alloy  
 2.Insulator Material: Thermoplastic UL94V-0  
 3.plating: Tin plated.  
 Lead free and ROHS compliant product

PIN NO.	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80
13	24.00	30.00	26.80
14	26.00	32.00	28.80
15	28.00	34.00	30.80
16	30.00	36.00	32.80

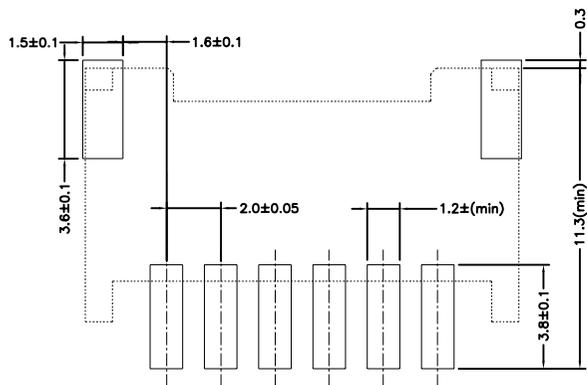

**RECOMMENDED PCB LAYOUT**  
TOLERANCE: ±0.05

GENERAL TOLERANCE			UNITS	NAME(INTENDED USE)		深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.		
SELECT		✓	mm	WF		TITLE: Customer Drawing For Wafer2.0mm XP SMT 贴片 PHS (B)		
TOL.	1	2	MAT'L	PART NO.(INTENDED USE)		DWG NO.:		
ON.	1	2		WF200**-01***		ATOM-AO2468		
X.XXX	±0.10	±0.15	FINISH	APPD:	Vicky	SCALE		
X.XX	±0.15	±0.20		CHKD:	Doris	SHEET		
X.X	±0.20	±0.25	Q'TY	DR:	Deng	REV.		
X.	±0.25	±0.30				1:1 1/1 A1		
ANGLE	±2'							