




5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
AO	2021.06.15		NEW
			APPROVER
			Abel

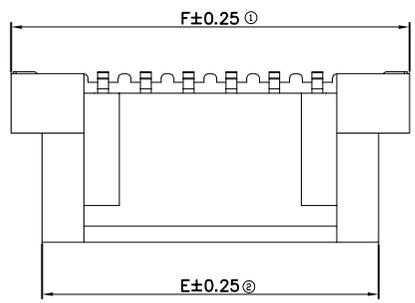

SPECIFICATIONS:

Material:







- 1.Housing: PA9T,UL94V-0,Color: Natural
- 2.Contact:H62,
Matte Tin 100-200u" plated over Nickel 20-40u"
- 3.Solder: C5191,
Matte Tin 100-200u" plated over Nickel 20-40u"

Electrical:

- 1.Current Rating: 3A AC,DC
- 2.Voltage Rating: 125V AC,DC
- 3.Dielectric Withstanding : 500V AC/minute
- 4.Insulator Resistance: 1000MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Operating Temperature : -25°C~+105°C

Major Dimension:▼

Products meet RoHS environmental requirements

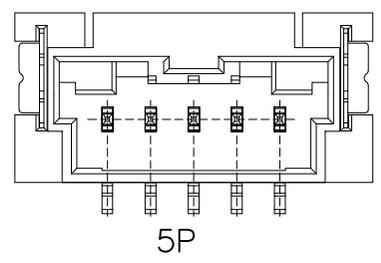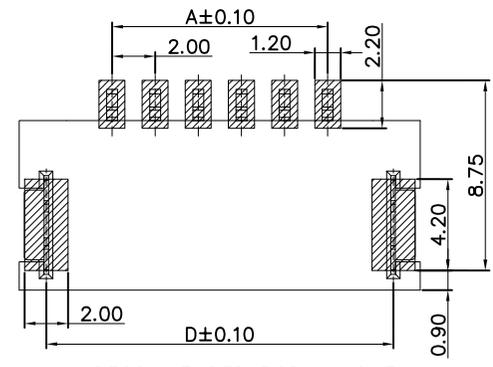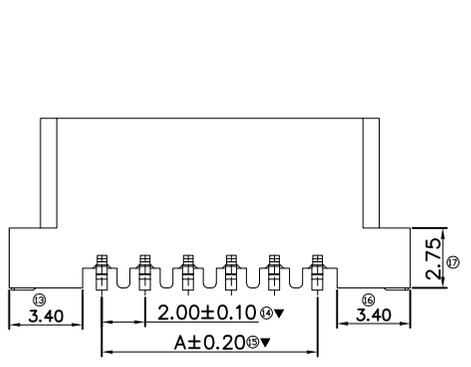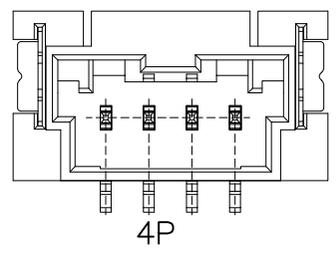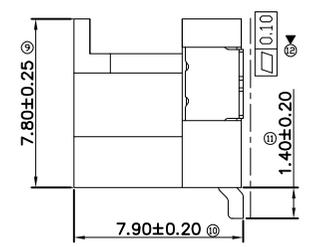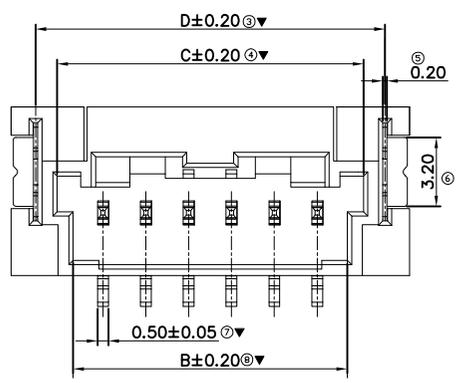

PIN NO	Dimensions (mm)					
	A	B	C	D	E	F
2P	2.00	4.80	6.30	8.10	7.50	10.50
3P	4.00	6.80	8.30	10.10	9.50	12.50
4P	6.00	8.80	10.30	12.10	11.50	14.50
5P	8.00	10.80	12.30	14.10	13.50	16.50
6P	10.00	12.80	14.30	16.10	15.50	18.50
7P	12.00	14.80	16.30	18.10	17.50	20.50
8P	14.00	16.80	18.30	20.10	19.50	22.50
9P	16.00	18.80	20.30	22.10	21.50	24.50
10P	18.00	20.80	22.30	24.10	23.50	26.50
11P	20.00	22.80	24.30	26.10	25.50	28.50
12P	22.00	24.80	26.30	28.10	27.50	30.50

GENERAL TOLERANCE			UNITS mm	NAME(INTENDED USE)	
SELECT	✓				WF
TOL.	1	2	MAT'L	PART NO.(INTENDED USE)	
ON.	1	2			WF200**-54***
X.XXX	±0.10	±0.15	FINISH	APPD: Abel	
X.XX	±0.15	±0.20			CHKD: Vicky
X.X	±0.20	±0.25			
X.	±0.25	±0.30	Q'TY	DWG NO.: ATOM-A08856	
ANGLE	±2'				

ATOM® 深圳市爱特姆科技有限公司
SHENZHEN ATOM TECHNOLOGY CO., LTD.

TITLE: Customer Drawing For Wafer2.0mm
XP SMT 立贴 带内扣 H=7.9

SCALE: 1:1

SHEET: 1/1

REV: AO