


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2009/08/07	/	NEW	Vicky

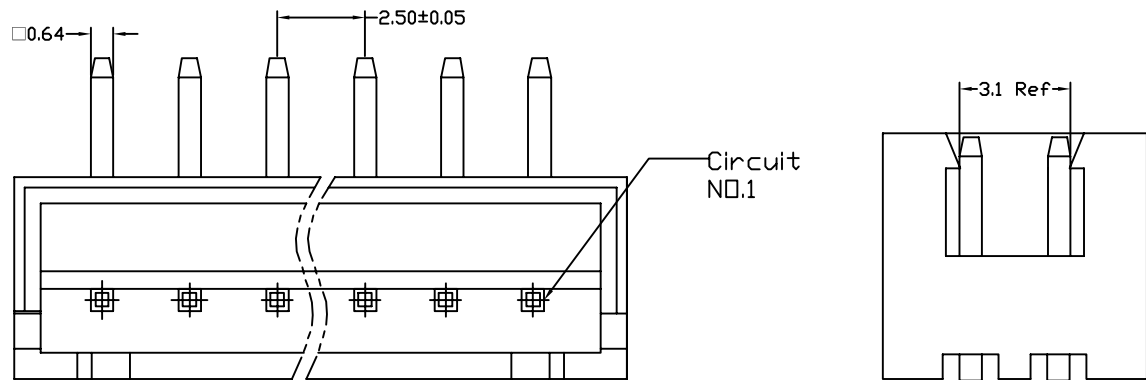

SPECIFICATIONS

Pitch: 2.5

Poles: 2~16

Voltage rating: AC,DC,250V(250HZ)

Current rating: 3.0A,AC,DC

Withstand voltage: 1000V AC/minute

Working Temperature: -25℃~+85℃

Insulation resistance: ≥1000 MΩ




Contact resistance: ≤0.02 Ω

Applicable PC board THICKNESS: 1.6mm

MATERIAL

Terminal: Brass

Housing: PA66, UL94V-0

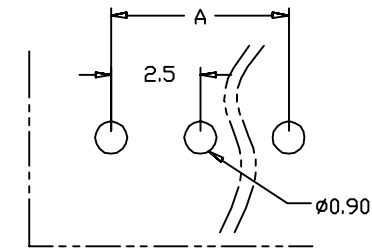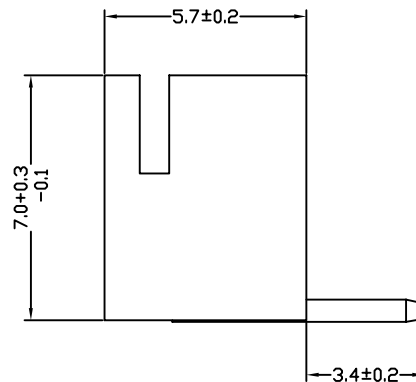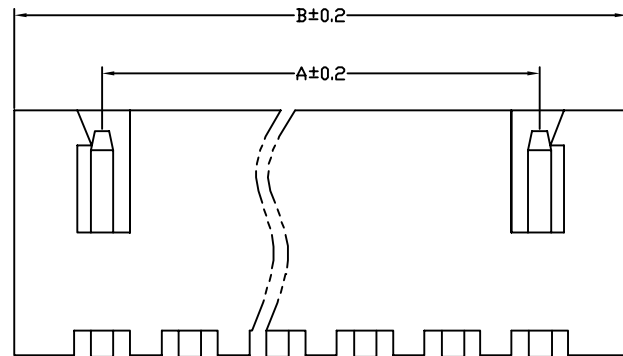

P.C.B LAYOT

PIN NO.	A	B
2	2.5	7.5
3	5.0	10.0
4	7.5	12.5
5	10.0	15.0
6	12.5	17.5
7	15.0	20.0
8	17.5	22.5
9	20.0	25.0
10	22.5	27.5
11P	25.0	30.0
12	27.5	32.5
13	30.0	35.0
14	32.5	37.5
15	35.0	40.0
16	37.5	42.5

GENERAL TOLERANCE				UNITS	mm	NAME:	ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	TOL.	1	2	3	MAT'L	PART NO:	TITLE: Wafer2.5mm XP DIP 90°			
ON.						WF250**-06***				
X.XXX			±0.05	±0.15	FINISH	APPD:	DWG NO. ATOM-A00781			
X.XX	±0.10	±0.13	±0.25			mike				
X.X	±0.15	±0.25	±0.50		Q'TY	CHKD:				
X.	±0.25	±0.38	±1.00			Vicky				
ANGLE	±2°					Iris				



SCALE
1:1

SHEET
1/1

REV
A