


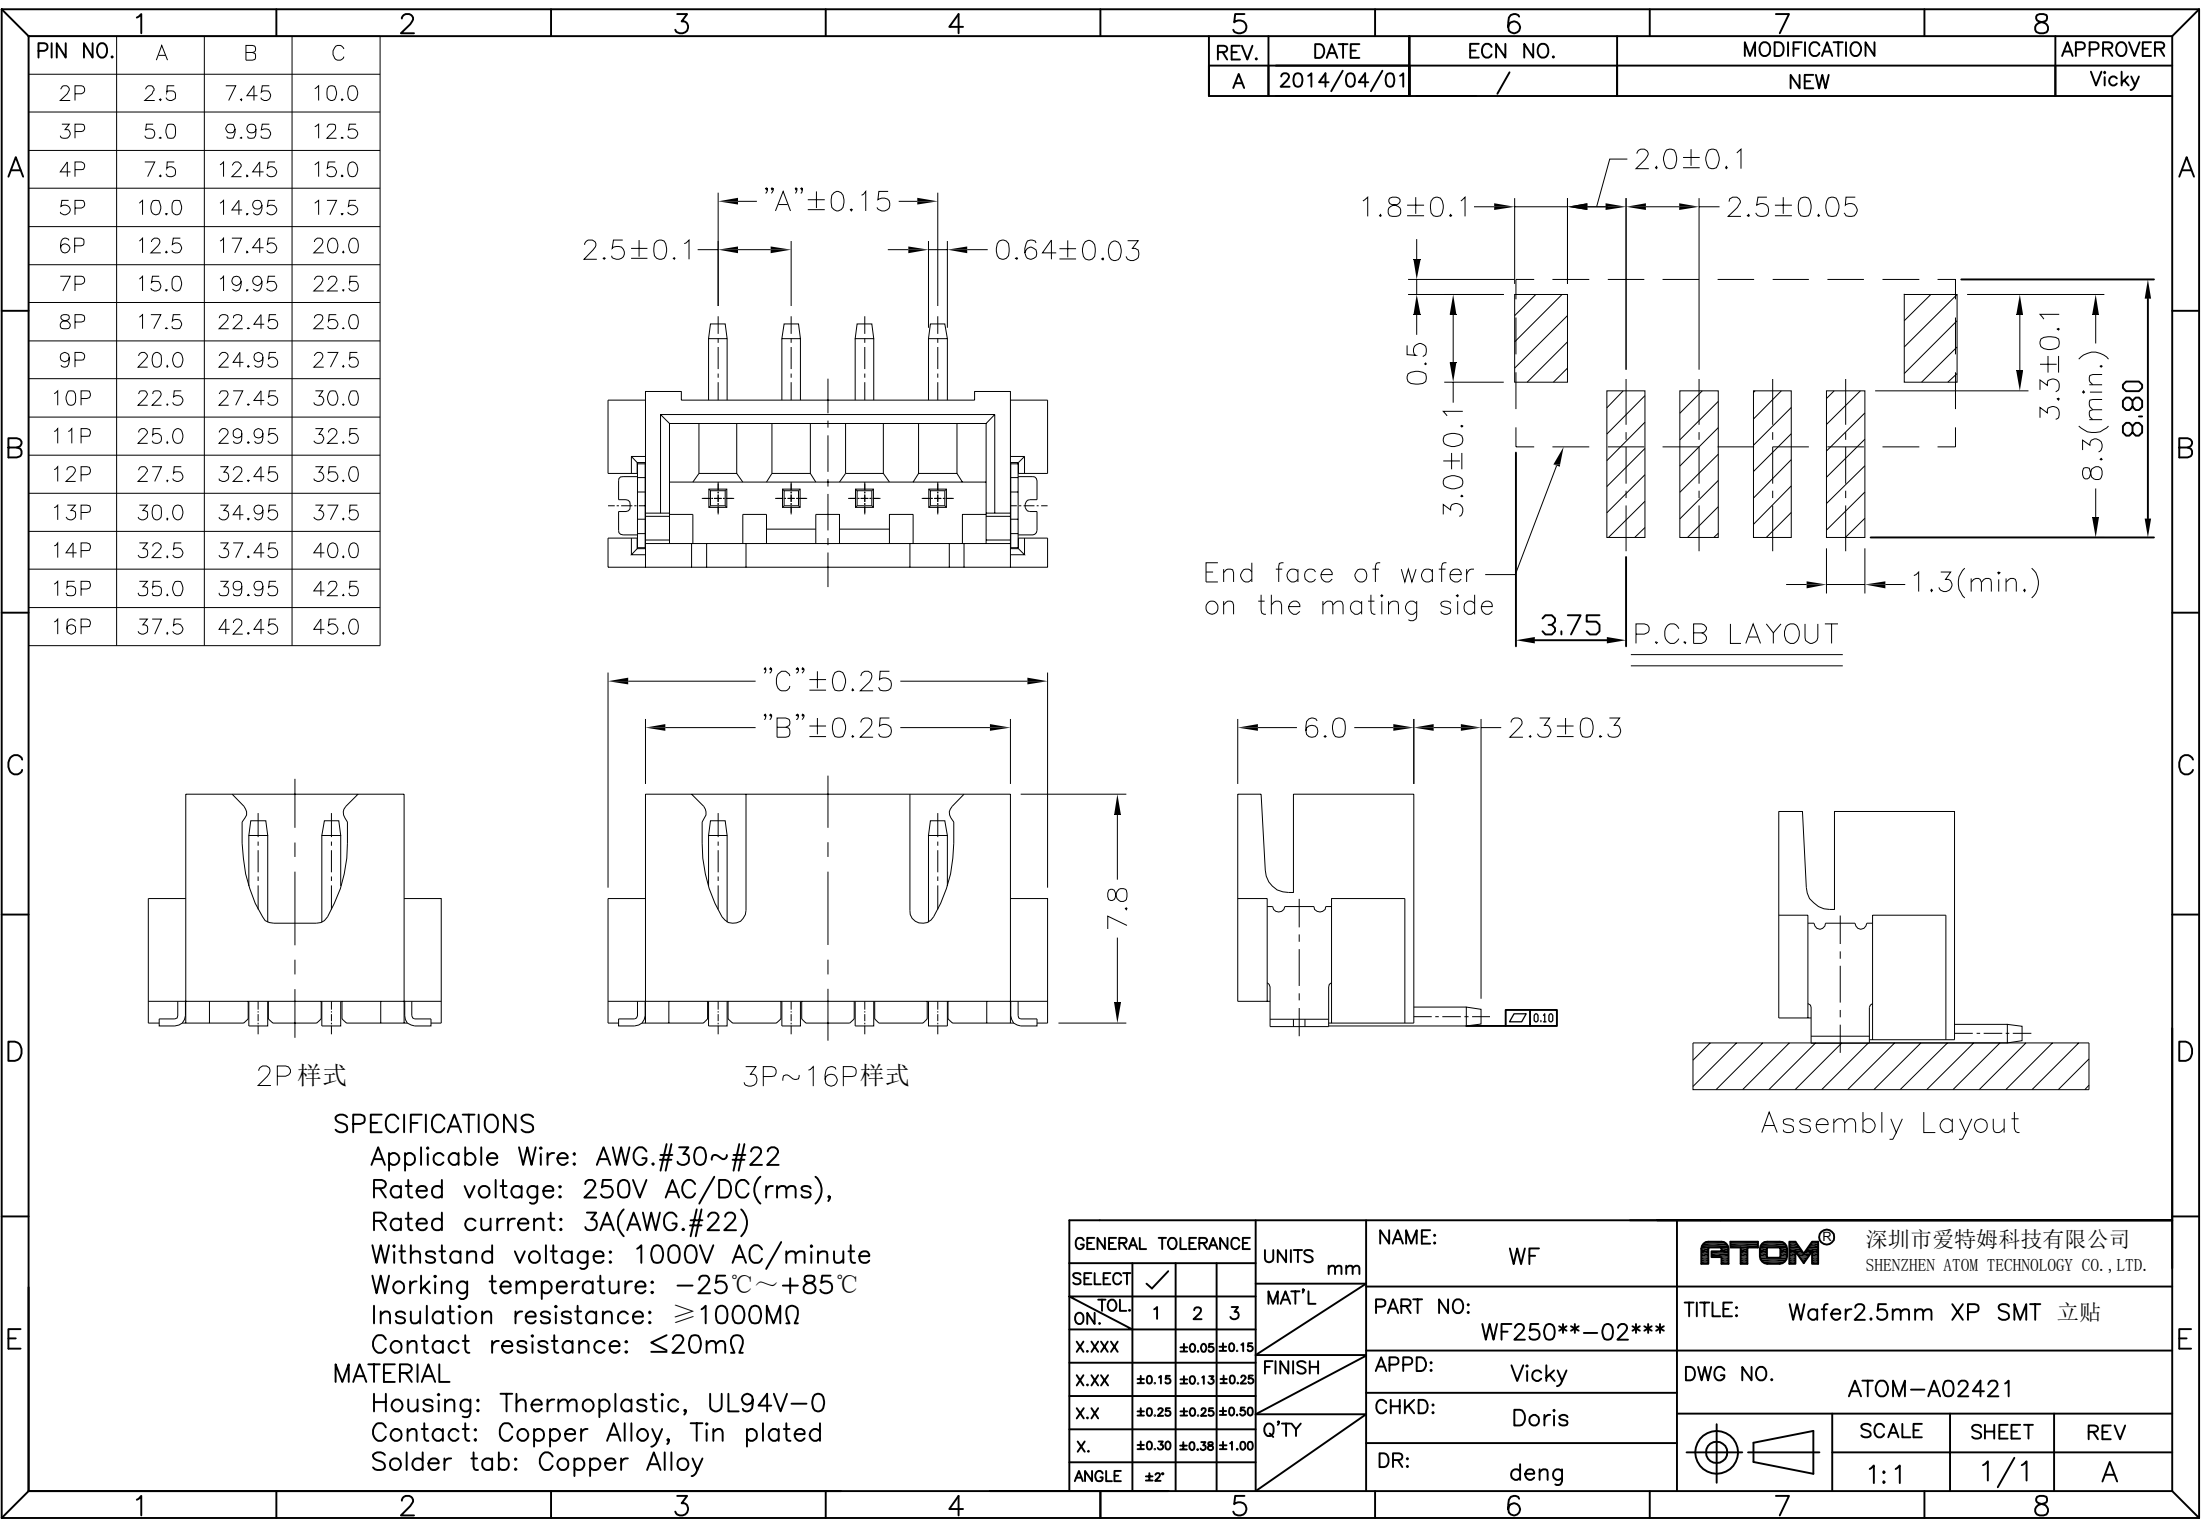


SPECIFICATIONS

Applicable Wire: AWG.#30~#22
Rated voltage: 250V AC/DC(rms),
Rated current: 3A(AWG.#22)
Withstand voltage: 1000V AC/minute
Working temperature: -25℃~+85℃
Insulation resistance: ≥1000MΩ
Contact resistance: ≤20mΩ

MATERIAL

Housing: Thermoplastic, UL94V-0
Contact: Copper Alloy, Tin plated
Solder tab: Copper Alloy

GENERAL TOLERANCE				UNITS mm	NAME: WF		ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	✓				MAT'L	PART NO: WF250**-02***	TITLE: Wafer2.5mm XP SMT 立贴			
TOL. ON.	1	2	3	FINISH			APPD: Vicky	DWG NO. ATOM-A02421		
X.XXX		±0.05±0.15			Q'TY	CHKD: Doris				
X.XX	±0.15	±0.13	±0.25	DR: deng						
X.X	±0.25	±0.25	±0.50							
X.	±0.30	±0.38	±1.00							
ANGLE	±2'						SCALE 1:1	SHEET 1/1	REV A	