

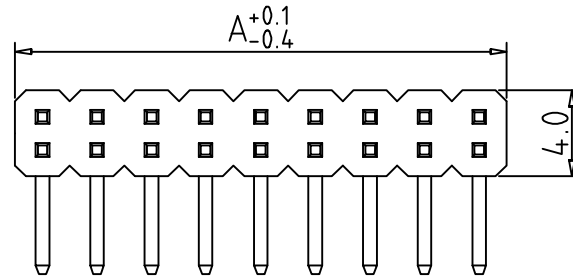
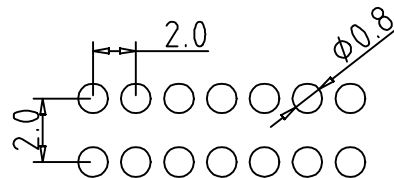


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2010/10/26	/	NEW	Vicky

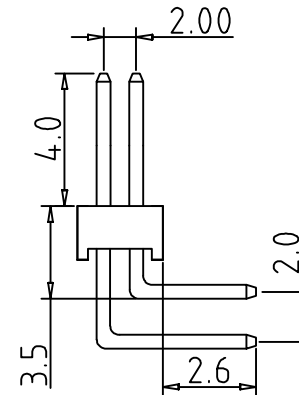


SPECIFICATIONS:

- 1.Current Rating: 2 Amp
- 2.Insulation Resistance: 1000Megohms min
- 3.Dielectric Withstanding : AC 500V
- 4.Operating Temperature : -55°C~+105°C
- 5.Insulator Material:Thermoplastic,UL94V-0
- 6.Contact Material:Brass
- 7.plating: Gold 0.8u"

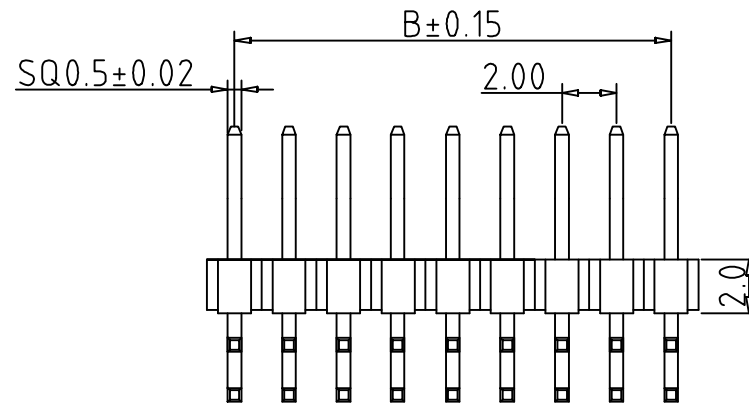

P.C.B LAYOUT

PIN NO.	A	B	PIN NO.	A	B
2×1pin	2.0		2×21pin	42.0	40.0
2×2pin	4.0	2.0	2×22pin	44.0	42.0
2×3pin	6.0	4.0	2×23pin	46.0	44.0
2×4pin	8.0	6.0	2×24pin	48.0	46.0
2×5pin	10.0	8.0	2×25pin	50.0	48.0
2×6pin	12.0	10.0	2×26pin	52.0	50.0
2×7pin	14.0	12.0	2×27pin	54.0	52.0
2×8pin	16.0	14.0	2×28pin	56.0	54.0
2×9pin	18.0	16.0	2×29pin	58.0	56.0
2×10pin	20.0	18.0	2×30pin	60.0	58.0
2×11pin	22.0	20.0	2×31pin	62.0	60.0
2×12pin	24.0	22.0	2×32pin	64.0	62.0
2×13pin	26.0	24.0	2×33pin	66.0	64.0
2×14pin	28.0	26.0	2×34pin	68.0	66.0
2×15pin	30.0	28.0	2×35pin	70.0	68.0
2×16pin	32.0	30.0	2×36pin	72.0	70.0
2×17pin	34.0	32.0	2×37pin	74.0	72.0
2×18pin	36.0	34.0	2×38pin	76.0	74.0
2×19pin	38.0	36.0	2×39pin	78.0	76.0
2×20pin	40.0	38.0	2×40pin	80.0	78.0

GENERAL TOLERANCE				UNITS mm	NAME: PH	ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	✓					MAT'L	PART NO: PH200***C-07***	TITLE: PH2.0*2.0 2*XP DIP 90° DA=4.0 DB=3.5 DC=2.6	
TOL ON:	1	2	3	FINISH	APPD: MIKE			DWG NO. ATOM-A01021	
X.XXX		±0.05±0.15				Q'TY	CHKD: Vicky		SCALE
X.XX	±0.15	±0.13	±0.25	DR: Doris					
X.X	±0.20	±0.25	±0.50						
X.		±0.38	±1.00						
ANGLE	±0.5°								