

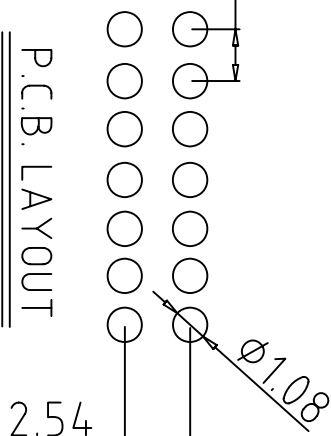
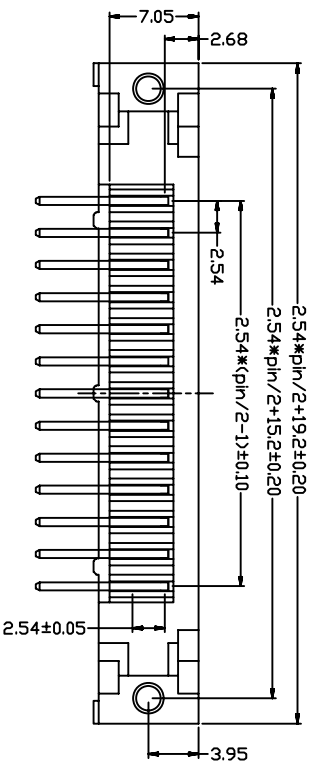


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2013/12/03	/	NEW	Vicky

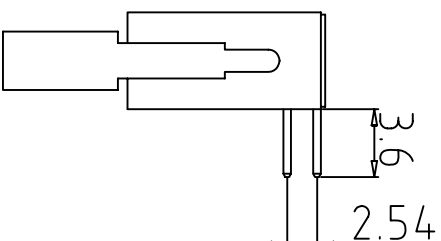

P.C.B. LAYOUT

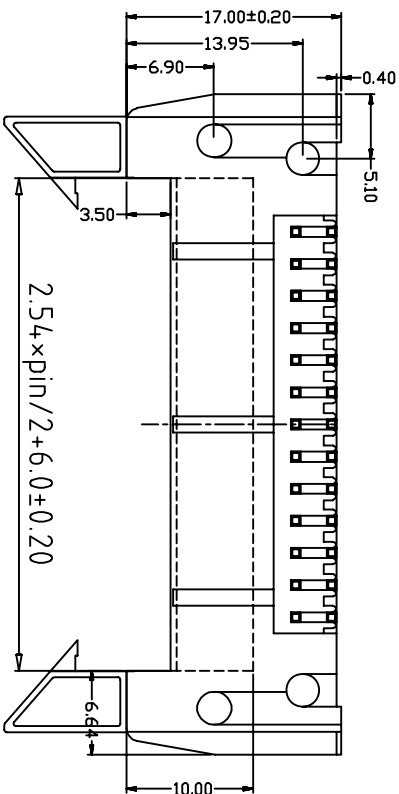

SPECIFICATIONS:

Current Rating: 3Amp
Insulator Resistance: 1000Megohms min
Dielectric withstanding: AC 500V
Operating Temperature: -55°~+105°
Max Processing Temp: 180°C for 5~10 Seconds
Contact Material: Brass
Insulator Material: PBT30%, UL94V-0
Plating: Glod 0.8U"

GENERAL TOLERANCE			UNITS mm		NAME:		TITLE:		
SELECT	✓				牛角		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.		
TOL	1	2	3	MAT'L	PART NO:		BH254**D***		
ON					APPD:		Vicky		
X.XXX		±0.08	±0.15	FINISH	CHKD:		Emilia		
X.XX		±0.15	±0.13	±0.25	DR:		Iris		
X.X		±0.20	±0.25	±0.50	DWG NO.		ATOM-A01362		
X.		±0.38	±1.00	Q'TY	SCALE		SHEET		REV
ANGLE	±0.5°				1:1		1/1		A