

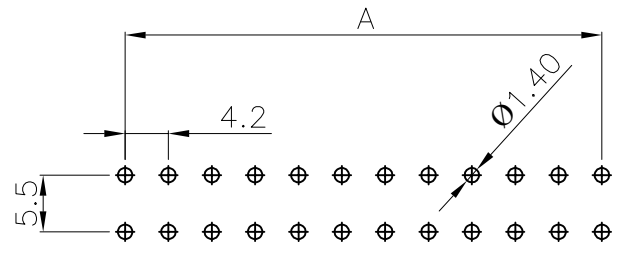
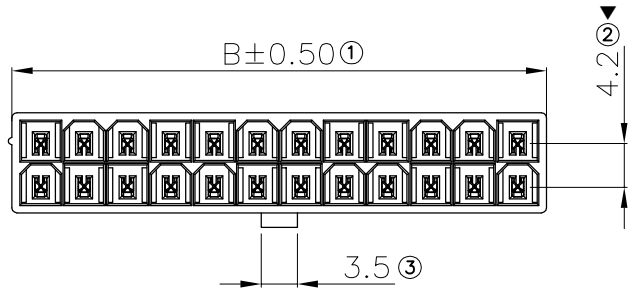


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
AO	2024.06.21	/	NEW	Abel

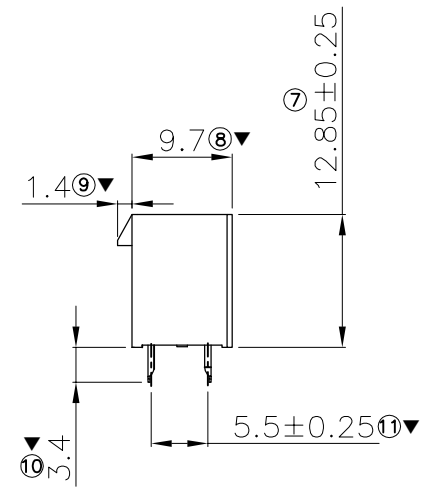


RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05
 THICKNESS: 0.8mm~1.6mm
 Thickness of steel mesh 0.1mm Min

SPECIFICATIONS:
Material:
 1.Housing:LCP ,black UL94V-0
 2.Contact:C2680,Bright Tin30u"min plated over Nickel 70u"min
Electrical:
 1.Current Rating:9A AC
 2.Voltage Rating:600V AC/DC
 3.Contact Resistance:20mΩ Max
 4.Dielectric Withstanding Voltage: 1500V AC
 5.Insulation Resistance: 1000MΩ Min
Environment characteristics:
 1.Operating Temperature: -40℃~+105℃
Major Dimension:▼
 Products meet RoHS environmental requirements

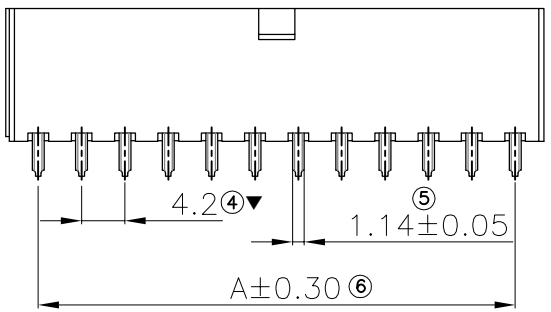

Poles	Dimensions (mm)	
	A	B
02	---	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

WF420** - 09***
 产品代码:Wafer
 产品间距
 产品PIN位
 预留码
 1:管装 2:卷装 3:盘装 4:袋装
 产品特性码:双排180°

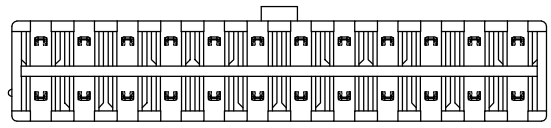

GENERAL TOLERANCE			UNITS mm	NAME(INTENDED USE) Wafer	ATOM ® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD. TITLE: Customer Drawing For Wafer4.2mm 2*XP DIP 180°双排 带扣 空心针			
SELECT	<input checked="" type="checkbox"/>							
TOL.	1	2	3	MAT'L	PART NO.(INTENDED USE) WF420** - 09***			
ON.	X.XXX	±0.10	±0.15		±0.20	APPD: Abel	DWG NO.: ATOM-A11571	
	X.XX	±0.15	±0.20	±0.25	FINISH	CHKD: Vicky		
	X.X	±0.20	±0.25	±0.30		DR: LHL	SCALE 1:1	
	X.	±0.25	±0.30	±0.50	Q'TY	SHEET 1/1		REV. AO
ANGLE	±2'							